

# Initial Environmental Examination

---

July 2017

## KGZ: Central Asia Regional Economic Cooperation Corridors 1 and 3 Connector Road Project —Additional Financing (Section “Kochkor [Km 64] to Epkin [Km 89]”)

Prepared by Japan Overseas Consultants/DI KYRGYZDORTANSIROEKT for the Ministry of Transport and Roads and for the Asian Development Bank.

This initial environmental examination is a document of the borrower. The views expressed herein do not necessarily represent those of ADB's Board of Directors, Management, or staff, and may be preliminary in nature.

In preparing any country program or strategy, financing any project, or by making any designation of or reference to a particular territory or geographic area in this document, the Asian Development Bank does not intend to make any judgments as to the legal or other status of any territory or area.

# Initial Environmental Examination

---

**Project Number: TA 8887-KGZ**  
**July 2017**

## **KGZ: CAREC Corridors 1 and 3 Connector Road Project (Section “Kochkor [Km 64] to Epkin [Km 89]”)**

This Initial Environment Examination in Detailed Design Stage was prepared by Japan Overseas Consultants/ DI"KYRGYZDORTTRANSPROEKT for the Ministry of Transport and Roads of Kyrgyz Republic and for the Asian Development Bank, by updating the IEE Report in the Feasibility Stage prepared by Kocks Consult GmbH / Finnish Overseas Consultants Ltd. / CAC Consulting

This initial environmental examination is a document of the borrower. The views expressed herein do not necessarily represent those of ADB's Board of Directors, Management, or staff, and may be preliminary in nature.

In preparing any country program or strategy, financing any project, or by making any designation of or reference to a particular territory or geographic area in this document, the Asian Development Bank does not intend to make any judgments as to the legal or other status of any territory or area.

## ABBREVIATIONS

|                |   |
|----------------|---|
| ADB            | - Asian Development Bank  |
| ADT            | - Average Daily Traffic   |
| AIDS           | - Acquired Immune Deficiency Syndrome                                 |
| AP             | - Affected People   |
| BoQ            | - Bill of Quantities  |
| CAREC          | - Central Asia Regional Economic Cooperation                          |
| CEWP           | - Construction Environmental Work Plan                                |
| CITES          | - Convention on International Trade in Endangered Species             |
| CO             | - Carbon Monoxide   |
| CSC            | - Construction Supervision Consultant                                 |
| CW             | - Civil Works   |
| dBA            | - A-weighted decibels   |
| DO             | - Dissolved oxygen  |
| EA             | - Executing Agency  |
| EIA            | - Environmental Impact Assessment                                     |
| EIP            | - Environmental Impact Permit   |
| EMoP           | - Environmental Monitoring Plan                                       |
| EMP            | - Environmental Management Plan                                       |
| FCM            | - Family Medicine Centres   |
| GDP            | - Gross Domestic Product  |
| GRM            | - Grievance Redress Mechanism   |
| h, hr          | - Hour  |
| Ha             | - Hectare   |
| HIV            | - Human Immunodeficiency Virus  |
| IA             | - Implementing Agency   |
| IEE            | - Initial Environmental Examination                                   |
| IES            | - International Environmental Specialist                              |
| IP             | - Indigenous People   |
| IPIG           | - Investment Projects Implementation Group                            |
| IUCN           | - International Union for Conservation of Nature                      |
| KDTP           | - Kyrgyzdortransproekt  |
| Kg             | - Kilogram  |
| Km             | - Kilometer   |
| Kpa            | - Kilopascal  |
| LAR            | - Land Acquisition and Resettlement                                   |
| LARP           | - Land Acquisition Resettlement Plan                                  |
| LHS            | - Left Hand Side  |
| Ls             | - Lump Sum  |
| m <sup>2</sup> | - Square Meter  |
| m <sup>3</sup> | - Cubic Meter   |
| MAC            | - Maximum Allowable Concentration                                     |
| Max.           | - Maximum   |
| ME             | - Ministry of Economy   |
| Min.           | - Minimum   |
| MOF            | - Ministry of Finance of the Kyrgyz Republic                          |
| MoTR           | - Ministry of Transport and Roads of the Kyrgyz Republic              |
| MoCIT          | - Ministry of Culture, Information and Tourism of the Kyrgyz Republic |
| MPC            | - Maximum Permissible Concentrations                                  |
| NES            | - National Environmental Specialist                                   |
| NGO            | - Non-Governmental Organization                                       |

|                 |   |   |
|-----------------|---|---|
| No.             | - | Number  |
| NO <sub>2</sub> | - | Nitrogen Dioxide                                      |
| PAM             | - | Project Administration Manual                         |
| PAP             | - | Project-Affected Person                               |
| PBM             | - | Performance-based maintenance                         |
| PER             | - | Public Environmental Review                           |
| PPMS            | - | Project Performance Management System                 |
| PPTA            | - | Project Preparatory Technical Assistance              |
| RAP             | - | Resettlement Action Plan                              |
| RHS             | - | Right Hand Side                                       |
| ROW             | - | Right-of-Way  |
| RP              | - | Resettlement Plan                                     |
| SA              | - | Social Assessment                                     |
| SAEPF           | - | State Agency on Environment Protection and Forestry   |
| SER             | - | State Environmental Review                            |
| SETI            | - | State Ecological and Technical Inspection             |
| SO <sub>2</sub> | - | Sulfur Dioxide  |
| SPS             | - | Safeguard Policy Statement                            |
| SSEMP           | - | Site Specific Environmental Management Plan           |
| TA              | - | Technical Assistance                                  |
| TMP             | - | Traffic Management Plan                               |
| TOR             | - | Terms of Reference                                    |
| TPH             | - | Petroleum Hydrocarbon                                 |
| TSP             | - | Total Suspended Particulates                          |
| UNFCC           | - | United Nations Framework Convention on Climate Change |
| WHSP            | - | Worker's Health and Safety Plan                       |

## Contents

|     |   |    |
|-----|---|----|
| A.  | Executive Summary .....                                       | 8  |
| B.  | Policy, Legal, and Administrative Framework .....             | 13 |
| 1.  | Purpose and Context of the Report .....                       | 13 |
| 2.  | Extent of IEE Study .....                                     | 14 |
| 3.  | Environmental Protection Legislation of Kyrgyz Republic ..... | 14 |
| 5.  | Permitting Processes in the Kyrgyz Republic .....             | 18 |
| 6.  | Environmental Standards .....                                 | 18 |
| C.  | Description of the Project .....                              | 20 |
| 1.  | Need for the Project .....                                    | 20 |
| 2.  | General information on Project Facility .....                 | 20 |
| 3.  | Type and Technical Road Category of the Project .....         | 21 |
| 4.  | Details of the Project .....                                  | 21 |
| 4.1 | Road Cross section .....                                      | 21 |
| 4.2 | Bridges and Culverts .....                                    | 23 |
| 4.3 | Powerlines .....  | 23 |
| 5.  | Temporary Ancillary Facilities .....                          | 23 |
| 5.1 | Material Sources and Cut and Fill .....                       | 23 |
| 5.2 | Construction materials .....                                  | 23 |
| 5.3 | Asphalt and Cement Batching Plants .....                      | 24 |
| 5.4 | Construction Camp .....                                       | 24 |
| 6.  | Alternatives .....  | 25 |
| 7.  | Traffic Volume .....  | 25 |
| 8.  | Proposed Schedule for Implementation .....                    | 25 |
| D.  | Description of the Environment .....                          | 26 |
| 1.  | <b>Topography, Geology and Soils</b> .....                    | 26 |
| 2.  | <b>Climate</b> .....  | 26 |
| 3.  | <b>Hydrology, Water Resources, and Water Quality</b> .....    | 26 |
| 4.  | <b>Ecological Resources in Project Area</b> .....             | 27 |
| 4.1 | <b>Flora</b> .....  | 27 |
| 4.2 | <b>Fauna</b> .....  | 27 |
| 5.  | <b>Endogenous and exogenous processes</b> .....               | 27 |
| 6.  | Socioeconomic Information .....                               | 28 |
| 6.1 | Regional Information .....                                    | 28 |
| 7.  | Cultural and Archaeological Resources .....                   | 28 |
| 8.  | Sensitive Receptors .....                                     | 30 |
| 9.  | Baseline Measurements .....                                   | 30 |
| 9.1 | Water Quality Measurements .....                              | 30 |
| 9.2 | Air Quality Measurements .....                                | 31 |

|  |    |
|--|----|
| 9.3 Noise and Vibration Measurements .....                               | 31 |
| E. Environmental Impacts and Mitigation Measures .....                   | 33 |
| <b>1. Impacts in the Project Phases</b> .....                            | 33 |
| Table 16: Prediction of Air Pollution along Project Road .....           | 34 |
| Impact of Reconstruction of Culverts .....                               | 39 |
| Impact to Existing Powerline/Pylons .....                                | 39 |
| Groundwater Contamination.....   | 39 |
| Figure 10: Simulation of Gasoline Contaminated Plume in Groundwater..... | 39 |
| 2. Mitigation measures .....   | 41 |
| 2.1 Pre-Construction & Design Phase.....                                 | 41 |
| 2.2. Construction Phase .....  | 42 |
| 2.3. Operations and Maintenance Phase.....                               | 50 |
| 3. Climate Change Impacts on the Project Road .....                      | 51 |
| F. Analysis of Alternatives.....   | 53 |
| 1. Zero option – the «Inaction»/ do nothing alternative .....            | 53 |
| 2. Alternative – the road reconstruction project.....                    | 54 |
| G. Information Disclosure, Consultation, and Participation .....         | 55 |
| 1. Public Consultations and Participation .....                          | 55 |
| 2. Information Disclosure .....  | 57 |
| H. Grievance Redress Mechanism.....                                      | 59 |
| 1. Objectives.....   | 59 |
| 2. Grievance Redress Group (RG) .....                                    | 59 |
| 2.1 Functioning of the GRG within the Grievance Redress Mechanism.....   | 59 |
| 2.2 Composition of GRG .....   | 59 |
| 2.3 Duties of GRG Members.....   | 60 |
| 2.4. Grievance Resolution Process .....                                  | 63 |
| 3. Additional Mechanisms Available for Grievance Redress .....           | 64 |
| I. Environmental Management Plan .....                                   | 65 |
| 1. EMP.....  | 65 |
| 2. Monitoring.....   | 78 |
| 2.1. Monitoring plan .....   | 78 |
| 2.2 Budget on Mitigation Measures.....                                   | 81 |
| 2.3 Budget on Monitoring Activities .....                                | 81 |
| 3.1 Institutional Framework .....  | 82 |
| 2.2. Reporting Requirements.....   | 83 |
| J. Conclusions and Recommendations .....                                 | 84 |
| 1. Conclusions.....  | 84 |
| 2. Findings and Recommendations .....                                    | 84 |
| <b>ANNEXES A: Outline Tables of Project</b> .....                        | 86 |
| <b>Annex A1: Alignment Sheet</b> .....                                   | 86 |

|   |            |
|---|------------|
| Annex A2: Main Earth Work Proposed.....   | 89         |
| Annex A3: Outline of Culverts in Section 2A .....                                 | 90         |
| Annex A4: Location of affected Power lines .....                                  | 93         |
| <b>Annex B - List of Attendees in the Public Consultation in Kochkor.....</b>     | <b>94</b>  |
| <b>Annex C – Written Comments, Recommendations and Questions .....</b>            | <b>96</b>  |
| <b>Annex D – Transcript of the video recording: in Kochkor District.....</b>      | <b>99</b>  |
| <b>Annex E – Results of laboratory analysis .....</b>                             | <b>101</b> |
| a) Air quality.....   | 101        |
| b) Water quality .....  | 105        |
| c) Noise .....  | 108        |
| d) Vibration.....   | 111        |
| Annex F. Conclusion of the Ministry of Culture, Information and Tourism, KR ..... | 114        |
| Annex G: Information letter from MoTR .....                                       | 117        |

## List of Tables

|  |    |
|--|----|
| Table 1: National Environmental Legislations .....                       | 15 |
| Table 2: MPC of Harmful Substances.....                                  | 19 |
| Table 3: International (IFC) Noise Standards (dB(A)) .....               | 19 |
| Table 4: Kyrgyz Republic Noise Standards (dB(A)).....                    | 19 |
| Table 5: Surface Water quality standards .....                           | 19 |
| Table 6: Geographical Jurisdictions along the Road Section .....         | 20 |
| Table 7: Volume of Earthwork .....                                       | 21 |
| Table 8: Bridges in the Section .....                                    | 23 |
| Table 9: Possible Borrow Areas.....                                      | 24 |
| Table 10: Results of Manual Traffic Count (2015).....                    | 25 |
| Table 11: Forecast of possible activation of mudflows and floods.....    | 27 |
| Table 12: Forecast of possible development of flooding processes .....   | 28 |
| Table 13: Water Quality Measurement Parameters the Section.....          | 31 |
| Table 14: Air Quality Measurement Results .....                          | 31 |
| Table 15: Noise and Vibration Measurement Results .....                  | 32 |
| Table 16: Prediction of Air Pollution along Project Road.....            | 34 |
| Table 17: Summary Table on Public Consultation for Kochkor - Epkin ..... | 56 |
| Table 18: Local Level GRG .....  | 59 |
| Table 19: Central Level GRG .....  | 60 |
| Table 20: Grievance Resolution Process.....                              | 64 |
| Table 21: Environmental Management Plan .....                            | 66 |
| Table 22: Environmental Monitoring Plan.....                             | 80 |
| Table 23: Number and Cost for Mitigation of Affected Trees .....         | 82 |
| Table 24: Budgetary Cost for Environmental Monitoring Specialists .....  | 83 |

|  |           |
|--|-----------|
| <b>Table 25: Budgetary Cost for Environmental Monitoring Requirements.....</b> | <b>83</b> |
|--|-----------|

## **List of Figures**

|  |           |
|--|-----------|
| <b>Figure 1: Location Map of the Road Section .....</b>                                  | <b>20</b> |
| <b>Figure 2: Technical Category II Road (Type 1-6).....</b>                              | <b>22</b> |
| <b>Figure 3: Technical Category II Road (Type 7-11).....</b>                             | <b>22</b> |
| <b>Figure 4: Location of Archaeological Resources near Cholpon village .....</b>         | <b>29</b> |
| <b>Figure 5: Actual Archaeological site near Cholpon village. ....</b>                   | <b>29</b> |
| <b>Figure 6: Simulation of NO<sub>2</sub> Concentration during Construction.....</b>     | <b>35</b> |
| <b>Figure 7 Simulation of Traffic Noise depending on Vehicle Speed .....</b>             | <b>35</b> |
| <b>Figure 8: Sumilation of Traffic Noise depending on the Year .....</b>                 | <b>36</b> |
| <b>Figure 9: Simulation of Construction Noise with/without Mitigation Measures .....</b> | <b>37</b> |
| <b>Figure 10: Simulation of Gasoline Contaminated Plumes in Groundwater .....</b>        | <b>39</b> |
| <b>Figure 11: Cemetery, RHS.....</b>   | <b>47</b> |
| <b>Figure 12: Cemetery, LHS.....</b>   | <b>47</b> |
| <b>Figure 13: Public Consultation in Jochkor (17 March 20.....</b>                       | <b>55</b> |



## **A. Executive Summary**

### **Introduction**

1. The Government of the Kyrgyz Republic has requested the Asian Development Bank (ADB) to identify, formulate, and prepare an ensuing loan and/or grant for the CAREC Corridors 1 and 3 Connector Road. The main outcome of the PPTA is to prepare a feasibility study suitable for ADB financing. The Section “Kochkor (Km 64) to Epkin (Km 89)” will be financed by ADB. The proposed Project will improve the following socio-economic indicators of the regions of the Kyrgyz Republic:
  - (i) Reduce the cost of passenger and cargo transportation between southern and Issyk- Kul and Naryn regions by providing direct access.
  - (ii) Reduce transport costs due to route cutting and better road conditions.
  - (iii) Increase in local and international transportation and movement.
  - (iv) Origination of additional income-generating opportunities for local residents
  - (v) Creation of new jobs
  - (vi) Good state of vehicles/Reduction of operating costs
2. This is the Initial Environment Examination of Detailed Design Stage Version report for the project in accordance with the legislation of the Kyrgyz Republic and has been prepared by upgrading the previous IEE Report in Feasibility Stage Version, wherever possible, as was initially prepared by KOCKS and approved by ADB. As a result of upgrading, same conclusion as previous IEE was obtained as “With the expected construction scope, no significant adverse or irreversible environmental impacts had been noted in the environmental assessment process”.
3. According to the categorization of ADB Safeguard Policy Statement, the project belongs to category “B” and doesn’t require full Environmental Impact Assessment (EIA). As a part of the ADB Policy, the project requires Initial Environmental Examination (IEE).

In the legislation of the Kyrgyz Republic, in accordance with the changes, according to the Regulation on the procedure for conducting environmental impact assessment in the Kyrgyz Republic No. 60 dated February 13, 2015, this stage is considered as Initial Environment Examination at the Detailed Design Stage and is documented in the IEE report. The categorization of projects, according to the legislation of the Kyrgyz Republic, is not carried out, therefore the EIA report and the IEE report can be considered as equivalent.
4. The IEE study for Section “Kochkor (Km 64) to Epkin (Km 89)” is being conducted based on secondary information from a number of available sources, while primary data were obtained from field parametric measurements along with the observations gathered from several field visits. Environmental public consultation was done and was attended by residents of the communities mentioned as well as those from surrounding villages.

### **Policy, Legal, and Administrative Framework**

5. The IEE study was in conformance with the national legal framework of Kyrgyzstan consisting of the important laws in environmental protection, water protection, cultural heritage, public health, and other national environmental legislations. In addition, International Treaties that Kyrgyzstan was a signatory were also considered as part of the overall framework.
6. The environmental assessment in Kyrgyz Republic is founded on two subsystems:
  - (i) OVOS (the Russian acronym for “Assessment of Environmental Impacts”), and
  - (ii) Ecological Expertise (State Environmental Review, SER).

The resulting IEE is presented for public consultations, after which revisions are done according to the public’s feedback. Subsequently, the OVOS report, Statement of Environmental Consequences, and other supporting documentations are submitted for the State Environmental Review (SER). After which the project may be approved, rejected or send for re-examination.
7. Under ADB approval requirements, a set of specific safeguard requirements are required to be met by the Borrowing Country in addressing environmental and social impacts and risks.

The project would undergo Screening and Categorization, formulation of Environmental Management Plan and Public Disclosure. Public Consultations for Category B would be required so that views of affected groups are taken into account in the design of the Project and within the mitigation measures proposed.

### **Description of the Project**

8. The project road Section “Kochkor (Km 64) to Epkin (Km 89)” is a 25-km east to west highway. This Section begins at the junction of three roads – the road that goes through the village of Kochkor, the Bishkek-Naryn-Torugart Highway serving as Kochkor Bypass and this section of the Project road. Generally, this Section follows the existing alignment up to Epkin (Km 89). The entire of this section is within Naryn Oblast and it traverses only one district, namely Kochkor (Kochkor, as the capital).

The details of the proposed road Section project are:

- (i) Rehabilitate and pave the project road to Technical Category II from Kochkor (Km 64) to Epkin (Km 89) according to Kyrgyzstan National Standard with Geometrical and Structural Requirements with design speed of 120 km/hour in rolling terrain (60 km/hour in mountainous terrain).
  - (ii) Rehabilitation, repair and/or replacement of bridges and culverts.
  - (iii) Construction of side drains and other drainage structures.
  - (iv) Provision of retaining walls and river protection measures, where necessary.
  - (v) Provision of adequate road signing and marking.
  - (vi) Provision of safety barriers.
9. The road is to be designed according to Kyrgyz geometric design standard, and accordingly, it shall be sufficient to carry the traffic loading efficiently within its projected service life. Effectively, these will be a two-lane road consisting of a carriageway width (sum of the width of lanes) and the width of the shoulders. The design elements for the cross section of the project road are as follows:
  - (i) Number of lanes: 2
  - (ii) Lane width: 3.5 – 3.75 m
  - (iii) Carriageway width: 7.00-7.50 m
  - (iv) Width of shoulder: 3.25-3.75 m (of which 0.50-0.75 m is paved)
  - (v) Total road width: 15.00 m

### **Description of the Environment**

10. The road 25 km from Kochkor (Km 64) to Epkin (Km 89) runs entirely in Kochkor valley, passing through a number of settlements interspersed by agricultural fields with a 2-line configuration of carriageway. In the settlement, the minimum distance from the edge of car lane to the residential building is 20m.
11. The territory of Kochkor District is vast tracts of agricultural lands devoted to farming and animal stock-raising. Kochkor valley is limited to in the north by the Kyzart Pass from the south Karagatty Kyzart Mountain Ridges. The mountain area has highly broken relief with high slopes. The difference of elevations in the valley varies from 1,700 to 2,400 meters, the mountain areas from 2400 to 4502 m. The terrain is characterized as undulating and mountainous and covered with grasses suitable for grazing.

### **Environmental Impacts and Mitigation Measures**

12. Most of the anticipated environmental impacts of the proposed road project are likely to be resulting directly from construction activities and certain impacts occur in operation stage as well.

The impacts during construction include (i) noise impacts, emission of pollutants to air and vibration, which is especially of high significance within the settlements alongside the project road and where sensitive receptors are located such as schools, hospitals mosques or other, e.g. households located near the road and others like quarries, bazaar (ii) impacts on water courses and rivers (iii) impacts on historical and archaeological sites (iv) impacts from aggregate sourcing at borrow sites; (v) impacts on soil and vegetation, inclusive tree

plantations alongside the project road due to site clearance activities; (vi) impacts from bridge and drainage facilities rehabilitation; (vii) impacts from asphalt plant and aggregate crushers and (viii) impacts from contractor's working camps.

Impacts in operation stage are, due to increased traffic volume and vehicle speed resulting in elevated levels of gaseous and noise emissions, and potentially increased pedestrian vs. vehicle accidents or spills of harmful substances.

Impacts have been identified in to design phase and mitigation measures shall be taken in construction and operation phases respectively.

13. The construction entails a number of activities which are expected to introduce impacts and disturbances to the general environment, especially during the construction period. Most of these impacts are confined within the right-of-way, construction sites, and facility sites; while some activities can affect the outlying areas or even a wider area, especially if not properly mitigated.
14. Avoidance of impacts can be executed by proper planning/preparation during the Pre-engineering and design phase. The mitigation measures will consist of the following: (i) use of green measures for erosion; (ii) asymmetric widening to avoid felling of trees; (iii) avoidance of encroachment to archeological and historical sites with strict instructions to workers; (iv) provision of road safety measures and traffic plan to avoid accidents and maintain access to people; (v) gaseous emissions will be minimized and controlled by proper and regular maintenance of equipment; (vi) dust is controlled by regular water spraying on exposed areas; (vii) noise is minimized at the vicinity of sensitive receptors by proper scheduling of works and provision of noise mufflers to trucks and equipment; (viii) surface water contamination is mitigated by avoiding petroleum spills and soil droppings in water and situating contaminating substances away from waterways and construction of settling ponds for clarifying water prior to discharge; (ix) material sources should be reinstated after usage; (x) ensure usage and installation of safety measures at worksites and along the road; (xi) strictly avoid possible habitat areas of biological organism and prohibit workers from harming indigenous local species.

### **Analysis of Alternatives**

15. The Two alternatives were considered in this IEE:
  - (i) Zero option - inaction / do nothing
  - (ii) The road reconstruction project
16. The "Zero option" alternative scenario will mean that the road stays "as is", in which no rehabilitation works. Considering the mentioned reasons and along with those presented in the "Country and Regional Strategy" and "Locality Specific Rationale", the benefits of rehabilitating and reconstructing the road generally outweigh the expectations of the "Zero option" alternative.
17. The second Alternative is considering the road reconstruction in the section Kochkor (Km 64) to Epkin (Km 89).

### **Consultation, Participation and Information Disclosure**

18. In accordance with ADB's Public Communications Policy (2011) and SPS (2009), Public Consultation meeting for this section on the environmental aspects was undertaken on 17 March 2016 in the village hall of Kochkor District Administration Building. During the public consultation, the Consultant (Kocks Consult, GmbH), prepared PowerPoint presentation regarding the technical features of the project and explained the potential environmental and social impacts with corresponding mitigation measures. This event was organized by IPIG with the assistance of PPTA consultants. At this instance, the participants were able to express what they thought about the project and were given a chance to ask clarificatory questions during the open forum. Forms were provided to the people for them to write in their own comments which incorporated in the IEE and serve as recommendations in the design phase.

19. The IEE shall also be disclosed to a wider audience via the ADB website. During the project implementation, periodic environmental monitoring reports shall be submitted by IPIG on behalf of MoTR and correspondingly also be uploaded in the ADB website and in KGZ on MoTR website.

### **Grievance Redress Mechanism**

20. The Grievance Redress Mechanism (GRM) is a process through which the affected people need a trusted way to voice and resolve concerns about the project and the project also finds an effective way to address affected people's concerns. The GRM will cover issues related to social, environmental and other safeguard issues under ADB safeguard covenants and Kyrgyz Law.
21. With two stage appeals – the Local (village) Level and Central Level, along with greater participation of the local people, resolution of complaints will be better ensured. ADB itself has additional mechanism in which a complainant can be appealed through the ADB Accountability Mechanism which is always accessible to the APs.

### **Environmental Management Plan**

22. The Environmental Management Plan (EMP) for the project road, consisting of impact mitigation and monitoring plan, has been prepared as part of this IEE. A program of monitoring, the Environmental Monitoring Plan (EMoP), is also developed herein to ensure that all concerned agencies take the specified action to provide the required mitigation, to assess the level of project impacts on environmental quality and to determine whether any additional measures may be necessary. This EMP will be part of the contract documents consisting of specified measures covering most of the possible issues that can occur will enable the avoidance, reduction, and mitigation of adverse impacts in the project cycle. The Contractor shall adopt the mitigation measures, particularly those for the construction into his Site-specific Environmental Management Plan (SSEMP) consistent with their own work program, which will be submitted to Supervision Consultant and MOTR for approval. Supplementary Plans will also be drawn up by the Contractor for specific situations to ensure a focused action on any problem that might arise.
23. Operational framework of the EMP involves the national agencies (IPIG-MoTR, SETI & SAEPF), ADB Safeguard Specialists, Construction Supervision Consultant, Contractor, with the local governments and recognizing roles of NGO's and people's organization at the project site.
24. The cost for implementing EMP will be financed by the loan, specifically the costs of mitigation measures will be included in the construction contracts, and the cost for environmental monitoring will be included in the consulting service of the CSC. Mitigation measures and a monitoring plan have been developed and incorporated into the EMP. Under the guidance of CSC, the contractor will have to submit general site-specific Environmental Management Plans on the basis EMP including following 11 annexes prior to commencing operations:
- (i) Method Statement for Construction
  - (ii) Dust Suppression Plan
  - (iii) Construction Noise Suppression Plan
  - (iv) Surface Water Contamination Prevention Plan
  - (v) Borrow Pits Management Plan
  - (vi) Soil Management Plant
  - (vii) Solid and Liquid Waste Management Plan
  - (viii) Cultural & historical sites Management Plan
  - (ix) Safety Management Plan
  - (x) Camp and Workshop Management Plan
  - (xi) Material Processing Plants/Equipment and Storage Facilities Plan

The SSEMP shall be endorsed by the construction supervision consultant before submission

to IPIG for approval.

25. IPIG will promptly inform ADB of the occurrence of any risks or impacts, with detailed description of the event and proposed corrective action plan if any unanticipated environmental and/or social risks and impacts arise during construction, implementation or operation of the Project that were not considered in the IEE. IPIG will report any actual or potential breach of compliance with the measures and requirements set forth in the EMP promptly after becoming aware of the breach.
26. Monitoring and reporting. During construction, monitoring shall be done by CSC. Based on this monitoring results, CSC will submit quarterly project progress report reflecting environmental safeguard compliance. CSC will assist IPIG in compiling and submitting semiannual monitoring reports (EMR) during project construction within one month after each reporting period. EMRs will be disclosed at ADB website and submitted to local authorities for acquaintance.

### **Conclusions and Recommendations**

27. The IEE/EMP-EMoP, as part of the contract documents, shall be adhered to by the Contractor. Accordingly, the Contractor shall require all his Sub-Contractors to follow also the EMP and such stipulations should also be shown in Sub-contracting agreements, which will be verified by the Engineer (or the CS Consultants).
28. Adequate public consultations were done in introducing the project as well as presentation of environmental and community impacts and the stakeholder concerns were incorporated into the IEE. The IEE will be disclosed to the public and can be viewed on ADB websites after implementation of 2nd Public Consultation in this DD Stage.
29. Upon assessment of the impacts in this IEE process, the project is maintained at Environmental Category B; since the predicted impacts are "site-specific, with few irreversible, and in most cases mitigation measures can be readily designed and to be incorporated in the detailed designs.
30. Mitigation measures have been developed for consideration in the detailed design phase, for implementation in the construction phase, and subsequently for the operations phase, to reduce all negative impacts to acceptable levels.
31. As per assessment in this IEE, the proposed Road Project is unlikely to significant environmental impacts. To ensure environmental and social safeguards, the IEE recommends that:
  - The strict monitoring is done; the strict monitoring is done;
  - measures be implemented;
  - avoid socioeconomic impact – hire local people;
  - contractor should have SSEMP approved before commencing construction works;
  - baseline measurements and periodic monitoring be done;
  - contractor to designate environmental staff;
  - CSC to provide sufficient training on EMP implementation and compliance monitoring for the CSC engineers and to the Contractor's staff;
  - CSC to assist IPIG in monitoring and reporting on EMP implementation
  - IPIG-MoTR shall oversee environmental compliance and ensure that reporting requirements are followed.

## **B. Policy, Legal, and Administrative Framework**

### **1. Purpose and Context of the Report**

32. The Government of the Kyrgyz Republic (the government) has requested for a project preparatory technical assistance (PPTA) from the Asian Development Bank (ADB) to identify, formulate, and prepare an ensuing loan and/or grant for the CAREC Corridors 1 and 3 Connector Road. The main output of the PPTA is a feasibility study suitable for donors financing. The study will cover five (5) sections:

Balykchi (Km 0) to kilometer-post 43 (Km 43), approximately 43 kilometers (km);

(i) **Kochkor (Km 64) to Epkin (Km 89), approximately 25 km;**

(ii) Epkin (Km 89) to Bashkugandy [Formerly Dyikan] (km 159), approximately 70 km;

(iii) Bashkugandy [Formerly Dyikan] (km 159) to Kyzyl-Zhyldyz (km 183), approximately 24km, where a Bypass Road is being envisioned to avoid the village of Chaek and part of Kyzyl-Zyldyz; and

(iv) Aral (Km 195) to Too-Ashuu pass (Km 286), approximately 91 km.

The Section Kochkor (Km 64) to Epkin (Km 89) will be financed by ADB.

33. The project scope also includes soft components to tackle sector-wide issues. Agreement needs to be reached with the government on the exact details, including:

- (i) improve efficiency of road asset management in the Kyrgyz Republic,
- (ii) support the government with institutional reforms in transport sector,
- (iii) introduce performance based maintenance contracts, and
- (iv) improve road safety in the Kyrgyz Republic.

The Investment Project Implementation Group (IPIG) within the Ministry Transport and Road (MoTR) shall be the Executing Agency (EA) for this project during the construction stage. As initial part of the possible funding assistance, the ADB has engaged Kocks Consult GmbH, Germany, to prepare a Feasibility Study and Preliminary Design for the entire project. The consultancy scope also includes an Initial Environmental Examination (IEE); and a social and poverty analysis and impact assessments, in accordance with ADB's Safeguard Policy Statement (SPS) 2009. Then, Japan Overseas Consultants was hired to upgrade this previous IEE to be finalized.

34. With reference to the Contract Agreement for Consultancy Services for the engagement, one of the main tasks of the Consultant is to update/upgrade the previous IEE report in Feasibility Stage to the IEE Report in the Detailed Design Stage Report for the project in accordance with the requirements of environmental legislations of the Government of Kyrgyzstan in addition to the ADB's Safeguard Policy Statement (SPS) 2009. Such environmental safeguard requirements specify that the borrowers/clients are to undertake an environmental assessment process which entails assessing impacts, planning, managing impact mitigations, preparing environmental assessment reports, disclosing information, undertaking consultation establishing a grievance mechanism, monitoring activities and reporting results. The IEE document shall also include particular environmental safeguard requirements pertaining to biodiversity conservation and sustainable management of natural resources, pollution prevention and abatement, occupational and community health and safety, and conservation of physical cultural resources.
35. This IEE document includes an Environmental Management Plan (EMP) that is the updated version of EMPs as had been presented previously, that covers, based on the identified potential impacts, their characteristics, magnitude, distribution, and duration, sensitive receptors and affected groups. The EMP is more quantitative, than the previous one, shall address the potential impacts and risks identified by the environmental assessment with the corresponding mitigation measures designed to minimize, reduce and mitigate (or compensate the affected parties) and to be implemented for the entire project cycle.

## **2. Extent of IEE Study**

36. This Initial Environmental Examination (IEE) Report is for the Section “Kochkor (Km 64) to Epkin (Km 89)”, which has a distance of around 25 km. This road section shall be rehabilitated into Category II road. Accordingly, with its setting and mode of rehabilitation, the project undertaking is classified under the ADB Safeguard Policy Statement 2009 as environment Category B, requiring an Initial Environmental Examination. The purpose of this stage is to review and upgrade the previous IEE Report with more updated and quantitative environmental information additionally obtained/revealed, based on updated construction information such as detailed configuration of infrastructures on/along the road (culverts and power lines), more detail of earth work proposed, potential borrow pits, additional field monitoring and prediction of behavior of noise/pollutions in air and groundwater by sophisticated numerical method. Other environmental issues were also reviewed and confirmed such as fauna and flora, climate change, health, safety and social issues. Based on all the impacts additionally identified/reviewed, considering with the construction scope, it is expected that few impacts, if any, are irreversible, and in most cases mitigation measures can be designed to avoid or minimize them, as is same conclusion of previous IEE report.
37. The first Public Consultations meeting on the environmental aspects for Kochkor (Km 64) to Epkin (Km 89), in accordance with Kyrgyz legislation on public access to the information and ADB’s Public Communications Policy (2011) and SPS (2009), was undertaken on 17 March 2016 in Kochkor District Administration Office. Meeting was organized by the IPIG-MoTR through official communication to the local leaders inviting stakeholders in the surrounding villages.

## **3. Environmental Protection Legislation of Kyrgyz Republic**

38. Environmental impact of the Kochkor (Km 64) to Epkin (Km 89) Road Rehabilitation Project is regulated by a number of environmental legislative acts of the Kyrgyz Republic. The Relevant elements of the environmental legislation of the Kyrgyz Republic are shown in Table 1

**Table 1: National Environmental Legislations**

| N  | Legislation   | Number & Year of adoption                        | Purpose/content   |
|--|---|--|---|
| <b>Main laws on environmental protection</b> |   |  |   |
| 1  | The Constitution of the Kyrgyz Republic   | 2010   | Land, its mineral resources, airspace, waters, forests, flora and fauna and other natural resources are used, but at the same time are under protection. Everyone is obliged to take care of the environment, flora and fauna of the country.   |
| 2  | The Environmental Safety Concept of KR  | No.506 dtd. 23.11.2007                           | It establishes the basic principles of environmental policy and determines global, national and local environmental issues; priorities in the field of environmental protection at the national level as well as tools to ensure environmental safety.  |
| 3  | National Sustainable Development Strategy of the Kyrgyz Republic for 2013-2017                          | No.11 dtd. 21.01.2013                            | Provides a conceptual sustainable development framework aimed to satisfy the needs of current generations and not to endanger at the same time the needs of future generations.   |
| 4  | Law of KR "On Environmental Protection"   | No.53 dtd. 1999 in the wording dtd. 27.04.2009   | Establishes the basic principles of environmental protection and provides legal authority to establish environmental quality, designate special protected areas, promulgate rules and procedures for the use of natural resources, establish environmental monitoring and control system and reinforce procedures for overcoming emergency situations. Among the standards and norms of environmental quality authorized under this law and related to the project there are: Standards of Maximum Safe Concentration of Hazardous Substances In Air, Water; Standards of Natural Resources Use; Standards of Maximum Safe Noise, Vibration Levels and Other Hazardous Physical Impacts. This law establishes the requirements for environmental examination (environmental assessment) intended by economic or other activities to prevent potential adverse environmental impacts. In addition, it prohibits financing or implementation of projects related to the use of natural resources without obtaining approval from the State Environmental Expertise. |
| 5  | Law of KR "On Environmental Impact Assessment"  | No.54 dtd. 1999, in the wording dtd. 04.05. 2015 | The main law related to environmental assessment. Its task is to prevent negative impacts on human health and environment occurring as a result of economic or other activities, and to ensure compliance of these activities with environmental requirements of the country.   |
| 6  | Law of KR "General technical rules and regulations for environmental safety in the Kyrgyz Republic"     | No.151 dtd. 2009                                 | Is meant to protect the environment. It determines the main provisions for technical regulation of environmental safety and establishes general requirements for ensuring environmental safety during design and operations of businesses and other facilities of all legal and physical entities.  |
| 7  | Regulation on procedure for conducting environmental impact assessment in the Kyrgyz Republic           | No. 60 dtd. 13.02.2015                           | Establishes the procedure for assessing the environmental impact of the proposed activity (hereinafter EIA). The purpose of EIA is to prevent and/or mitigate the environmental impacts of the proposed activity and other related social, economic and other consequences.   |
| 8  | Regulation on Water Zones and Strips of Water Bodies Protection in the Kyrgyz Republic                  | No.271 dtd. 7.07. 1995                           | Defines the procedure for establishing water zones and strips of water bodies protection in the Kyrgyz Republic, establishes a regime of economic activity and land use located in the water protection zones and strips. This law also defines responsibility for keeping them in proper shape.  |
| 9  | Rules for the protection of surface waters in KR  | on March 14, 2016 № 128                          | These Rules govern the protection of surface waters from pollution and depletion, in the implementation of the water users of different types of business activities that have or may have an adverse impact on the status of surface waters, irrespective of their legal form, as well as regulate the procedure for implementation of measures for the protection of surface water.   |
| 10   | Law of KR "On Protection of Atmospheric Air"  | No.51 dtd. 1999, in the wording dtd. 09.08.2005  | Governs the relations on use and protection of atmospheric air.   |
| 11   | Law of KR "On Production and Consumption Waste"   | No.89 dtd. 2001                                  | Defines the national policy in production and consumption waste management. It is aimed at preventing negative impacts from production and consumption waste on the environment and human health while handling it and their maximum involvement in the economy as an additional source of raw materials.   |
| 12   | Law of KR "On Protection and Use of Flora"  | No.53 dtd. 2001                                  | Establishes the legal framework for ensuring effective protection, rational use and reproduction of flora resources.  |
| 13   | Law of KR "On Wildlife"   | No.59 dtd. 1999, in the wording dtd. 24.06.2003  | Establishes the legal relations in the context of protection, use and reproduction of wildlife.   |
| 14   | Law of KR "On local self-government and local state administration"                                     | No.101 dtd. 2011                                 | Establishes the principles for setting-up local authorities at the level of administrative and territorial units of the Kyrgyz Republic.  |
| 15   | Law of the KR "On industrial explosives";   | No. 110 dtd 21. 05. 2015                         | Defines the legal framework for the regulation of explosives trafficking on the territory of the Kyrgyz Republic, and ensuring the safety of personnel working with explosive materials, the population, as well as the protection of property and the environment;   |
| 16   | Regulation on the procedure of consideration and issuance of industrial safety authorization documents. | No.301 dtd. 30.05.2013                           | Establishes the procedure for consideration and issuance of legal entities and individuals, allowing documents authorized executive body, endowed with special licensing features in the field of industrial safety, including conduct of explosive works (procurement, storage of explosive; license for explosive work, etc.)   |
| <b>Legislation on Land Acquisition</b>       |   |  |   |



| N  | Legislation  | Number & Year of adoption                           | Purpose/content   |
|--|--|---|---|
| 17   | The Constitution of the Kyrgyz Republic  | 2010  | Clause 12 recognizes a diversity of forms of ownership and guarantees equal legal protection of private, state, municipal and other forms of property (Clause 12, paragraph 1). Land can be of private, municipal and other forms of ownership except for pastures, which cannot be privately owned (Clause 12, paragraph 5). Property is inalienable. No one can be arbitrarily deprived of his property. Seizure of property by the state against the will of the owner is allowed only by court decision (Clause 12, paragraph 2). Seizure of property for public purposes specified in the law is possible by the court decision with fair and advanced compensation of property cost and other damages caused as a result of such alienation. (Clause 12, paragraph 2).                    |
| 18   | Civil Code   | No.16 dtd. 8.05.1996 in the wording dtd. 30.05.2013 | Determines that the person whose right is violated can demand full compensation for damages, unless the law or agreement consistent with the law says otherwise (Clause 14, paragraph 1). The Civil Code specifies the following losses subject to compensation: expenses incurred or to be incurred by the person whose right is violated in connection with restoration of violated rights (Clause 14, paragraph 2); loss or damage to property (Clause 14, paragraph 2); lost income that would be received by the person under normal civil turnover conditions if his right was not violated (lost profits) (Clause 14, paragraph 2); Compensation for loss of profits along with the other costs, at least in the amount of such income, to the person losing land, assets or livelihood. |
| 19   | Land Code  | No.45 dtd. 2.06.1999 in the wording dtd. 26.05.2009 | Governs land relations in the Kyrgyz Republic, basis for the origin, procedure for exercise and termination of rights to land and their registration, and also aimed to create land and market relations in state, communal and private ownership of land and efficient use and protection of land. The Land Code is the main document, which regulates land use.   |
| 20   | Law of KR «On transfer (transformation) of land»   | No. 145 dtd. 15.07.2013                             | This law is developed in accordance with the Land Code of the Kyrgyz Republic and other normative legal acts of the Kyrgyz Republic. It defines the legal basis, conditions and procedure for transfer (transformation) of land from one category to another or from one type of land to another.   |
| 21   | Law «On Highways»  | No.72 dtd. 2.06.1998                                | According to Clause 4 the public roads are owned by the state and not subject to sale and cannot be passed into private ownership. This law (Clause 27) also provides that without prior approval of the State Automobile Inspectorate and the Ministry of Transport and Road of the Kyrgyz Republic the following is prohibited among others: trade on the roadside; placement of kiosks, pavilions and similar structures; and, unauthorized use of road lands (Clause 23)  |
| 22   | Regulation on valuation of assets  |   | Valuation of assets is made based on the Provisional Rules of activities of valuers and valuation organizations (Government Resolution #537 dtd. August 21, 2003), property valuation standards (Government Resolution #217 dtd. April 3, 2006) and other national legislative provisions.  |
| <b>Law On Protection And Use Of Historical And Cultural Heritage</b> |  |   |   |
| 23   | The Law "On protection and use of historical and cultural heritage"  | No.91 dtd. 26.07.1999                               | Establishes legal norms for protection and use of tangible historical and cultural heritage on the territory of the Kyrgyz Republic, which is of unique value for people. The law is mandatory for all legal entities and individuals. It defines their rights and obligations in the context of protection and use of tangible historical and cultural heritage. Historical and cultural heritage are the historical and cultural monuments associated with historical events in the life of the people, development of society and the state, material and spiritual creative works representing historical, scientific, artistic or other value.   |
| <b>Law on Access to Information</b>                                  |  |   |   |
| 24   | The Law "On access to information held by public bodies and local self-government of the Kyrgyz Republic"                          | No.213 dtd. 28.12.2006                              | This law regulates the rights and obligations of public authorities to provide information to the local population, in order to achieve transparency of work of public awareness  |
| <b>International Conventions and Agreements</b>                      |  |   |   |
| 25   | UN Framework Convention on Climate Change  | 2000  | Combating global climate change and its consequences.   |
| 26   | Aarhus Convention on access to information, public participation in decision-making and access to justice on environmental issues. | 2001  | To support the protection of human rights to a healthy environment and wellbeing, access to information, public participation in decision-making and access to justice on issues related to the environment.  |

39. Ratification of international legal acts involves implementation of international requirements into the national legislation and harmonization of the Kyrgyz legislation with the international legislation. However, this process is moving very slowly in Kyrgyzstan given that conventions are really frameworks that need to be translated into national laws, a process that is time consuming and complicated.

#### 4. Required ADB Environmental Approval

40. ADB requires the consideration of environmental issues in all aspects of its operations. Superseding the previous environment and social safeguard policies, ADB's Safeguard Policy Statement, 2009 (SPS, 2009) sets out the policy objectives, scope and triggers, and principles for three key safeguard areas: (i) environmental safeguards, (ii) involuntary resettlement safeguards, and (iii) Indigenous Peoples safeguards.

41. ADB adopts a set of specific safeguard requirements that borrowers/clients are required to meet in addressing environmental and social impacts and risks. Borrowers/clients comply with these requirements during project preparation and implementation. The environmental safeguard requirements are indicated in Appendix 1 of SPS 2009 (Safeguard Requirements 1: Environment). This states that ADB requires environmental assessment of all project loans, program loans, sector loans, sector development program loans, and loans involving financial intermediaries, and private sector loans.
42. In the ADB's Screening and Categorization, the nature of the environmental assessment required for a project depends on the significance of its environmental impacts, which are related to the type and location of the project, the sensitivity, scale, nature and magnitude of its potential impacts, and the availability of cost-effective mitigation measures. Projects are screened for their expected environmental impact are assigned to one of the following four categories:
- (i) **Category A.** Projects could have significant adverse environmental impacts. An Environmental Impact Assessment (EIA) is required to address significant impacts.
  - (ii) **Category B.** Projects could have some adverse environmental impacts, but of lesser degree or significance than those in category A. These impacts are site-specific, few if any of them are irreversible, and in most cases mitigation measures can be designed more readily than for category A projects. An IEE is required to determine whether significant environmental impacts warranting an EIA are likely. If an EIA is not needed, the IEE is regarded as the final environmental assessment report.
  - (iii) **Category C.** Projects are unlikely to have adverse environmental impacts. No EIA or IEE is required, although environmental implications are reviewed.
  - (iv) **Category FI.** Projects involve a credit line through a financial intermediary or an equity investment in a financial intermediary. The financial intermediary must apply an environmental management system, unless all projects will result in insignificant impacts.
43. Environmental Management Plan: An Environmental Management Plan (EMP) which addresses the potential impacts and risks identified by the environmental assessment shall be prepared. The level of detail and complexity of the EMP and the priority of the identified measures and actions will be commensurate with the project's impact and risks.
44. Public Disclosure: ADB will post the following safeguard documents on its website so affected people, other stakeholders, and the general public can provide meaningful inputs into the project design and implementation:
- (i) For environmental Category A projects, draft EIA report at least 120 days before Board consideration;
  - (ii) Final or updated EIA and/or IEE upon receipt; and
  - (iii) Environmental Monitoring Reports submitted by Implementing/Executing Agencies during project implementation upon receipt.
45. The Section Kochkor (Km 64) to Epkin (Km 89) was classified based on ADB's Safeguard Policy Statement (2009), and ADB Methodological Guidelines on Environmental Assessment (2003) as a category "B", and IEE is required and regarded as the final environmental assessment report.
46. ADB also requires public consultation in the environmental assessment process. For Category B projects, the borrower must consult with groups affected by the proposed program and with local non-governmental organizations (NGOs) if possible. The consultation needs to be carried out as early as possible in the program cycle so that views of affected groups are taken into account in the design of the program and within the mitigation measures proposed. Any compensation related grievance redress issues will be resolved according to the Program's Resettlement Framework. A single Grievance Redress Mechanism (GRM) shall be set up to tackle both environmental and social issues for the project.

## **5. Permitting Processes in the Kyrgyz Republic**

47. The assessment of the possible effects of economic and other activities on the environment and human health, as well as the development of a list of measures to prevent adverse effects (destruction, degradation, damage and depletion of natural ecological systems and natural resources), and improve the environment are carried out in the framework of environmental impact assessment provided the environmental legislation of the Kyrgyz Republic.
48. Environmental impact assessment is carried out according to the
  - Regulations on the procedure for environmental impact assessment in the Kyrgyz Republic (13 February, 2015, #60);
  - Regulations on the procedure of the state ecological examination in the Kyrgyz Republic (7 May, 2014, #248);
  - Law "On Ecological Expertise" No.54 dtd. 1999, (with amendments as of 04 May 2015),
  - Law "On Environmental Protection" No.53 dtd. 1999, and
  - Law "General technical regulation on environmental safety."No.151 dtd. 2009.
49. The Environmental Management Plan (EMP) is developed on the basis of the EIA, design solutions and refined, is specified on each next stage of the project. EMP reflects all the possible negative impacts that have been identified EIA and includes mitigation measures these effects.
50. Environmental assessment in Kyrgyzstan is founded on two subsystems: (i) OVOS (the Russian acronym for "Assessment of Environmental Impacts"), and (ii) Ecological Expertise (State Environmental Review, SER). Based on a "list", project screening is done to determine whether a project is the subject to environmental assessment or not. For cases that this is required, an OVOS is conducted by an OVOS consultant hired by a Project Proponent. The environmental assessment proceeds produces the EIA documents which will be subjected for further reviews.
51. The resulting EIA/IEE is then presented for public consultations, after which revisions are done according to the public's feedback. Subsequently, the OVOS report, Statement of Environmental Consequences, and other supporting documentations are submitted for the State Environmental Review (SER). After which the project will be approved, rejected or send for reexamination.
52. Continuation of the SER depends on the project, but cannot be more that 3 month after submission by the Initiator of the project with all EIA/IEE documents to SER. Public Environmental Review (PER) is organized and conducted by the initiation of the local people, local administrations and Civil societies, registered in the Kyrgyz Republic. The outputs of public environmental review are directed to the agency, which is implementing the state environmental expertise and to the agency, which is responsible for the decisions of implementing of the expertise objects.
53. The outputs of the public consultation are incorporated in the Public Environmental Review (PER) which can be done both stage of the OVOS or also initiated in parallel to the SER. The SER duration depends on the complexity of the project, but should not exceed 3 months after submission of all the OVOS documents for the SER by the Project Proponent.

## **6. Environmental Standards**

54. The following environmental standards are applied to the Project. International standards were also presented here with for comparison with Kyrgyz standards; subsequently the more stringent standards shall be used as monitoring requirements.

### **Air quality**

55. Maximum permissible concentrations of harmful substances in ambient air according to Kyrgyz and international standards below in Table 2.

**Table 2: Maximum Permissible Concentrations of Harmful Substances**

| Pollutants   | Maximum permissible concentration (mg/m <sup>3</sup> ) |                   | Concentration averaging period    |                           |
|--|--|-------------------|-----------------------------------|---------------------------|
|  | According to national legislation                      | According to IFC* | According to national legislation | According to IFC*         |
| Dust   | 0.5  | -                 | daily average                     | -                         |
| PM <sub>10</sub> (Reference only and not monitored)  | -  | 0.01              | -                                 | 1 year                    |
|  | -  | 0.025             | -                                 | 24 hours                  |
| PM <sub>2.5</sub> (Reference only and not monitored) | -  | 0.02              | -                                 | 1 year                    |
|  | -  | 0.05              | -                                 | 24 hours                  |
| Sulphur Dioxide (SO <sub>2</sub> )                   | 0.5  | 0.02              | daily average                     | 24 hours                  |
| Nitrogen Dioxide (NO <sub>2</sub> )                  | 0.085  | 0.04              | daily average                     | 1 year                    |
| Carbon monoxide (CO)                                 | 3.0  | 0.1               | daily average                     | Maximum daily 8 hour mean |

\*World Health Organization (WHO). WHO Ambient Air Quality Guidelines.

## Noise

56. International and Kyrgyz norms are presented in Table 3 below.

**Table 3: International (IFC) Noise Standards (dB(A))**

| Noise Level Guidelines*                 |                                 |                       |
|---|---------------------------------|-----------------------|
| Receptor                                | One Hour L <sub>Aeq</sub> (dBA) |                       |
|   | Daytime 07:00–22:00             | Nighttime 22:00–07:00 |
| Residential; institutional; educational | 55                              | 45                    |
| Industrial; commercial                  | 70                              | 70                    |

\*Guidelines values are for noise levels measured out of doors. Source: Guidelines for Community Noise, World Health Organization (WHO), 1999.

57. International and Kyrgyz norms are presented in Table 4 below.

**Table 4: Kyrgyz Republic Noise Standards (dB(A))**

| Description of activity/category  | L <sub>Aeq</sub> |       | L <sub>max</sub> |       |
|---|------------------|-------|------------------|-------|
|   | Day              | Night | Day              | Night |
| Areas directly adjacent to hospitals and sanatorium   | 45               | 35    | 60               | 50    |
| Areas immediately adjacent to dwellings, polyclinics, dispensaries, rest homes, holiday hotels, libraries, schools, etc.      | 55(58)           | 45    | 70               | 60    |
| Areas immediately adjacent to hospitals and dormitories   | 60               | 50    | 75               | 65    |
| Recreational areas in hospitals and sanitariums   | 35               |       | 50               |       |
| Rest areas at the territories of micro-districts and building estates, rest houses, sanitariums, schools, homes of aged, etc. | 45               |       | 60               |       |

SN (Sanitary Norms) 2.2.4/2.1.8.562-96 "Noise at workplaces, in dwelling rooms, in public buildings and at the area of residential development".

(58) is a modified IFC guideline based on the monitored background

## Surface water

58. Monitoring qualities of surface water are presented in Table 5 below.

**Table 5: Surface Water quality standards (for water bodies for household and cultural use of water)**

| Pollutants                  | Maximum permissible concentration (mg/m <sup>3</sup> ) |                                   |
|-----------------------------|--|-----------------------------------|
|                             | According to national legislation                      | According to EC legislation       |
| Turbidity                   | Not less than 20/10 cm                                 | Not less than 1,0 meters/depth    |
| Oil Products                | 0,3 mg/L   | not visible in the form of a film |
| Dissolved Oxygen (DO)       | -  | -                                 |
| pH                          | -  | -                                 |
| Total Suspended Solid (TSS) | Increasing 0.25 / 0.75                                 | -                                 |

GN 2.1.5.1315-03 with changes GN 2.1.5.2280-07 and SanPiN2.1.5.980-00, Directive 2006/44 / EC of the European Parliament and of the Council of 6.09 in '06 on the quality of fresh waters needing protection or improvement of quality in order to maintain fish life.

## C. Description of the Project

### 1. Need for the Project

59. Since Kyrgyzstan is a mountainous, landlocked country, regional commerce depends heavily on road transport, which dominates the Kyrgyz transport system and heavily dependent on road transport. As mentioned in Country Partnership Strategy with ADB, the road infrastructure has been routinely affected by climate-induced extreme events, including extreme temperatures, landslides, and mudslides. It is for this reason that further investment will be needed in the rehabilitation and maintenance of the road infrastructure.
60. The proposed project will help link the southern regions of Osh, Batken, and Jalal-Abad with the northern regions of Naryn, Issyk-Kul, Chui, and Talas, and then further connect to the regional corridors. The project will: (i) reduce the cost of passenger and cargo transportation between southern and northern regions by providing direct access, (ii) provide a more direct transit route between Kazakhstan and Tajikistan, and (iii) help stimulate economic activity such as trade.

### 2. General information on Project Facility

61. This Section's starting point designated as Km 64, begins at the junction of three roads – the road that goes through the village of Kochkor, the Bishkek-Naryn-Torugart Highway serving as Kochkor Bypass and this section of the Project road. Generally, this Section follows the existing alignment up to Epkin (Km 89). The entire of this section is within Naryn Oblast and it traverses only one district, namely Kochkor (Kochkor, as the capital).
62. Within the Kochkor District, the road traverses the villages of Kok-Zhar, Chikildek and Epkin. Also in Kok-Zhar village a bridge spans over Zhon Aryk River, which is one of the tributaries of Chui River.
63. Table 6 shows the Geographical Jurisdictions that the road section traverses or is near to.

**Table 6: Geographical Jurisdictions along the Road Section**

| Oblast | Rayon   | Village   | Section / km  |
|--------|---------|-----------|---------------|
| Naryn  | Kochkor | Kok-Zhar  | Km 64 – Km 89 |
|        |         | Chikildek |               |
|        |         | Cholpon   |               |
|        |         | Epkin     |               |

Source: The Consultant

64. The map of the project road is shown in Figure 1.



**Figure 1: Location Map of the Road Section**

65. Engineering-geological conditions of subgrade construction on the North-South Alternative road on the section between Kochkor to Epkin are favorable. Baseline with a length of 25 km

is laid mainly on the existing roadbed with gravel envelope, in some spaces with asphalt coat. Coating is asphalt, mainly with a thickness of 5-6 cm, rarely 9-10 cm. Base of road pavement and is constructed from gravel, pebble and crushed-stone soils with sandy-loam, sandy fillers.

66. The road is in poor condition, the surface is bumpy with numerous patches, covered with frequent transversal and longitudinal cracks, often with crack network. Also in Kok-Zhar village a bridge spans over Zhon-Aryk River, which is one of the tributaries of Chui River. The road also crosses many feed and irrigation ditches and low places.

### 3. Type and Technical Road Category of the Project

67. The Section “Kochkor (Km 64) to Epkin (Km 89)” will be upgraded to Technical Road Category II consisting of (i) pavement works – replacement and/or construction of new pavement structure; (ii) bridge construction/repair – mostly repairs of bridge decks; (iii) culverts and drainage works – replacement of old culverts and improvement of existing ones with installation of side ditches; (iv) road curvature improvements – for improved drivability and safety, curvatures and gradients will be improve, especially at existing narrow curves; (v) carriage way widening – in a number of spots the road width will be widened to allow for safe two-way traffic, and pedestrian access; (vi) slope cuts – due to necessary widening and safety; (vii) slope stabilization – cuts will be stabilized by structural works; and (viii) installation of road furniture – necessary safety features and furniture shall be installed at strategic locations along the road. The envisioned service life of the pavement based traffic load forecast is set at 20 years, with the normal routine and periodic maintenance.

### 4. Details of the Project

#### 4.1 Road Cross section

68. The road is to be designed according to Kyrgyzstan geometric design standard, and accordingly, it shall be sufficient to carry the traffic loading efficiently and with the vehicles from the opposite directions can pass safely. Effectively, these will be a two-lane road consisting of a carriageway width (sum of the width of lanes) and the width of the shoulders. The design elements for the cross section of the project road are as follows:

|       |                    |   |
|-------|--------------------|---|
| (i)   | Number of lanes:   | 2   |
| (ii)  | Lane width:        | 3.5-3.75 m                                  |
| (iii) | Carriageway width: | 7.00-7.50 m                                 |
| (iv)  | Width of shoulder: | 3.25-3.75 m (of which 0.50-0.75 m is paved) |
| (v)   | Total road width:  | 15.00 m                                     |

69. Planned volume of earthworks is summarize as shown in Table 7:


**Table 7: Volume of Earthwork**

| Description  | Unit           | Quantity |
|--|----------------|----------|
| Excavation of top soil (vegetative layer)                              | m <sup>3</sup> | 75,470   |
| Excavation to spoil of unsuitable and surplus material, common soil    | m <sup>3</sup> | 76,200   |
| Excavation to spoil of unsuitable and surplus material of rocky ground | m <sup>3</sup> | 11,500   |
| Formation of embankment, common material from cut                      | m <sup>3</sup> | 55,000   |
| Provision of Subgrade, selected material                               | m <sup>3</sup> | 23,500   |


Locations, type (cut or fill) and scale (length, width, depth/height) of earthwork are summarized in Annex A2.

70. Typical pictures of sections Technical Category II Road (Types 1-6) are shown in Figure 6 while those of ‘Types 7-11) are indicated in Figure 7.



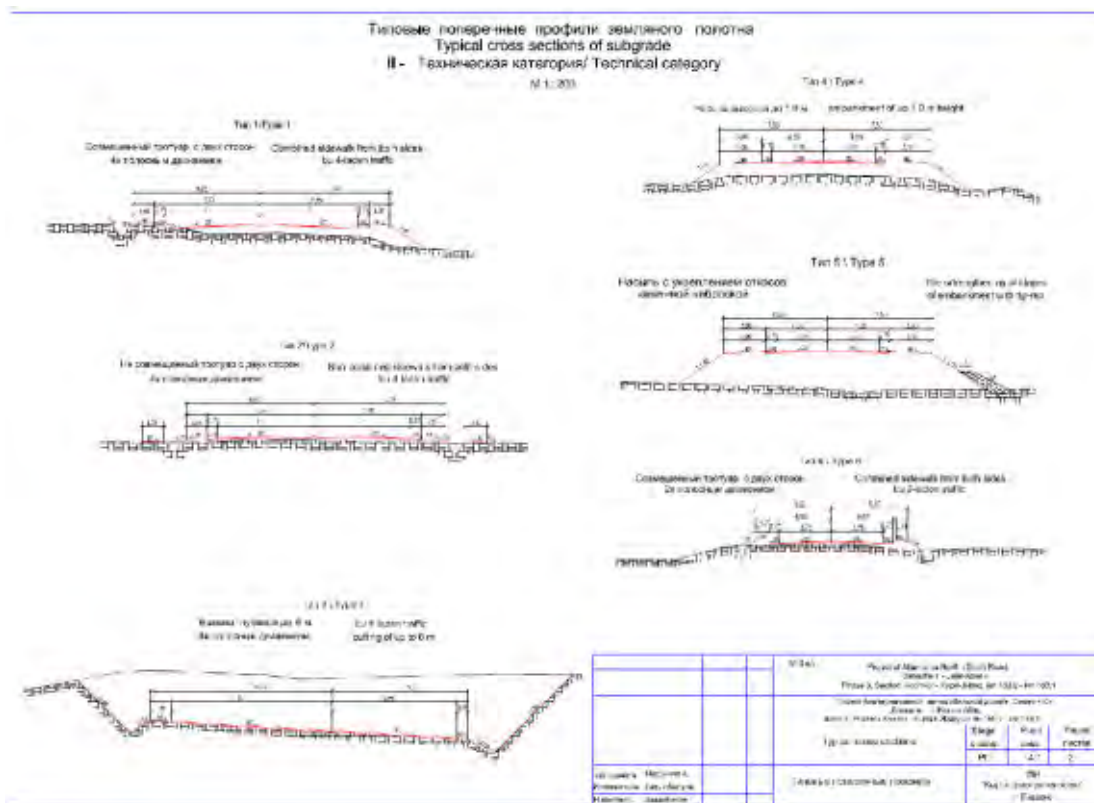

**Figure 2: Technical Category II Road (Type 1-6)**

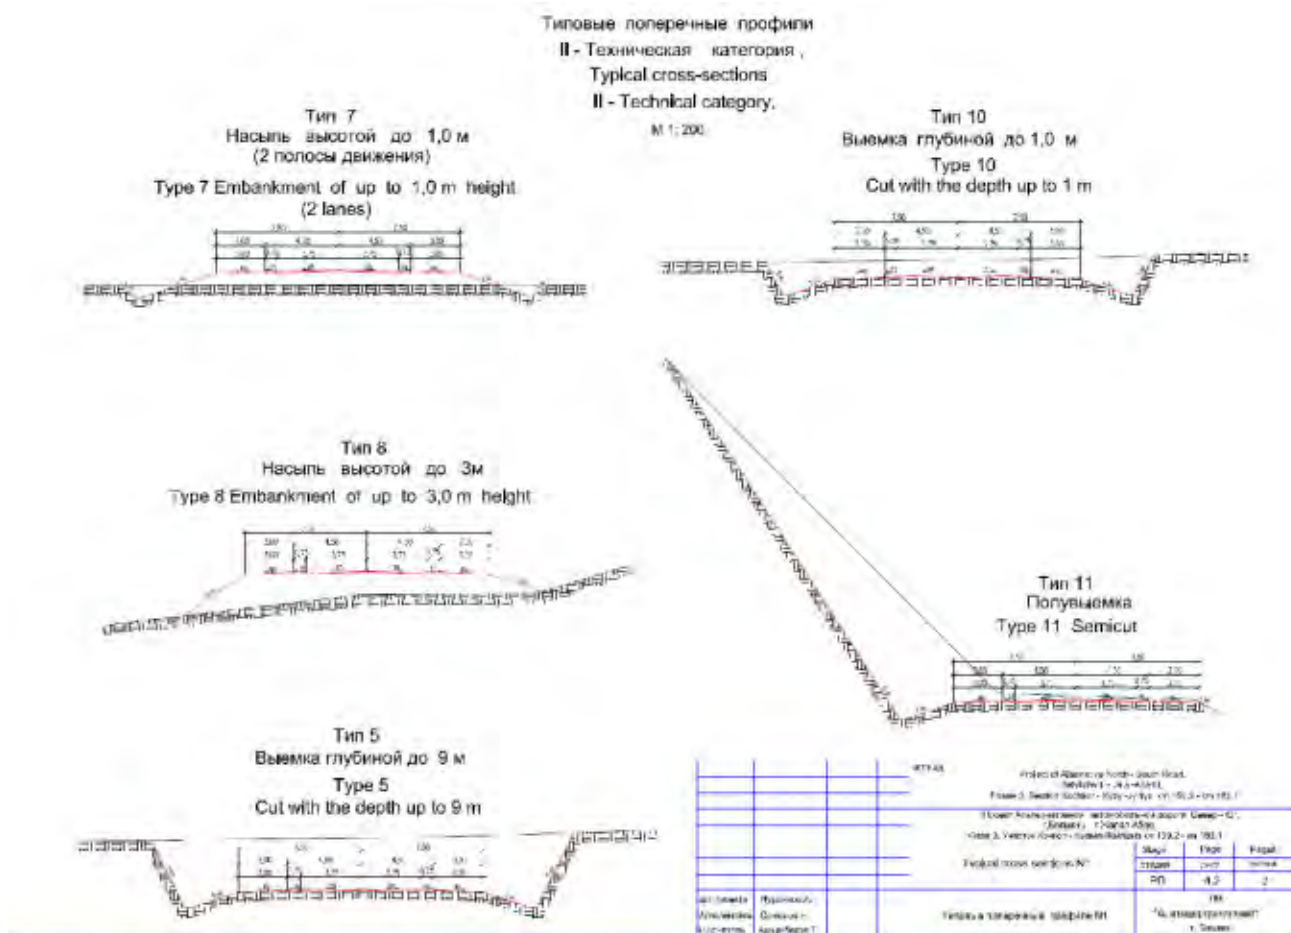

**Figure 3: Technical Category II Road (Type 7-11)**

## 4.2 Bridges and Culverts

71. There are four (4) major bridges along this section of the project road as shown in the Table 8. Minor water crossings pass through culverts which are also going to be reconstructed. Estimate is 35 culverts.

**Table 8: Bridges in the Section**

| No. | Bridge Location | Name of crossing watercourse | Span Scheme | Bridge length, m | Design bridge width, m | Proposed Rehabilitation Measure |
|-----|-----------------|------------------------------|-------------|------------------|------------------------|---------------------------------|
| 1.  | 65+414          | Zhon-Aryk                    | 14.06x3     | 47,38            | 11.5+2x1.5             | repair, widening                |
| 2.  | 68+046          | Mukan                        | 1x6.0       | 6.5              | 11.5+2x0.75            | replacement                     |
| 3.  | 86+530          | Ak-Uchuk                     | 1x6.0       | 11,1             | 11,5+2x1,5             | replacement                     |
| 4.  | 88+793          | Zharkoomdu                   | 1x6.0       | 11,1             | 11.5+2x0.75            | replacement                     |

## 4.3 Powerlines

72. Very often, overhead powerlines are running along the road and sometimes crosses the road. Locations these powerlines are summarized in Annex A4.

## 5. Temporary Ancillary Facilities

### 5.1 Material Sources and Cut and Fill




73. Considerable volume of materials will be obtained from borrow areas and will be used for construction of road embankments and bridge approaches. Several feasible borrow areas are quite apparent in the general vicinity. Contractors involved in the recent road reconstruction works also can readily identify potential areas for borrow materials which can be used for the bridge approach roads. The prospective contractor will probably identify his own source of materials. However, the materials need to be approved by the construction supervision engineer prior to using them for the project.
74. Should the Contractor be sourcing the materials from existing and operational quarry site, the contractor should exert influence on the operator that all required permits from local authorities, get approval from territorial departments of SAEPF are obtained and proper operational and management measures be instituted to minimize impacts to the general environment. On the other hand, if the contractor plans to begin development of a new borrow pits, then it is required of him to the mandatory procedures under the provisions of the Kyrgyz Republic, namely, the contractor must obtain all necessary permits for the allocation of plots for borrow pits or spoils from the local government, coordinated with regional administrations to develop a "plan of development and reclamation of borrow pits" and transmit the necessary documents to the MOTR KR to obtain a license for the development of borrow pits in the State Committee for industry, energy and subsoil use of the KR. These steps are not required when using existing quarries or precast plants. In the case of private borrow pits all permits (licenses, coordination with local authorities, State Agency on Environment Protection and Forestry, etc.) is the responsibility of the owners of the quarry, which should be specified in the contracts concluded between the contractor and the owner of the quarry.
75. During the field investigations by the material specialist, suitable construction materials were located and inspected. However, near the road section, no suitable materials were found. During to construction period, the contractor should perform his own material survey and process the corresponding permits for the operation of material sources.

### 5.2 Construction materials

76. Table 9 provides a list of possible sites for borrow areas.



**Table 9: Possible Borrow Areas**

| No. | km   | Side | Description                         | Availavility | Photo   |
|-----|------|------|-------------------------------------|--------------|---|
| 1   | 76   | LHS  | Old borrow pit with sand and gravel | Yes          |  |
| 2   | 81   | LHS  | Sand and gravel                     | Yes          |  |
| 3   | 85.6 | LHS  | Sand and gravel Slope deposit       | Yes          |  |

### 5.3 Asphalt and Cement Batching Plants

77. In establishing asphalt plant at the site for the road pavement of basically the binder course and the surface course; Gases will be emitted when producing the asphalt hot mix likewise bitumen spill may occur during handling and mix preparation. For the cement batching plant for concreting works such as bridges, culverts and drainage works, cement dust can contaminate the air. It is same for crushing plant to produce suitable sizes of sand and gravel for asphalt and concrete. In addition, the preparation, mixing and loading of concrete mix into the transit mixer and subsequent washing of trucks will result into soil and water contamination.
78. These facilities should be situated at appropriate distances from the residences (not less than 500m) as well as the river (not less than 75m, depending on the size of water protection zone) so as not to result to water contamination. Within the project road, since the area is rural, there are ample spaces to set up these plants. The Contractor should obtain the necessary permits, negotiate properly with the landowners and reinstate the area after usage at the end of the project.

### 5.4 Construction Camp

79. Selection of the required land plots for organizing the construction camps is the Contractor/s responsibility, as well as negotiation with the owners of the lands and getting required permissions. There are free land plots to be used for the construction camps and Contractor has a choose to select relevant territory for the location. The proper maintenance of all the service and sanitary facilities at the construction camp falls under the direct responsibility of the Contractor under the supervision of the construction supervision engineer for the project. The sanitary facilities or ablution include toilets, urinals, showers, washstands and a laundry area. In addition, equipment and maintenance yard will also have to be sited accordingly. Waste water should not be discharged into the river unless treated in compliance to local effluent standards. Solid waste collection and disposal should be planned properly in accordance with the requirements to the solid wastes. Solid waste disposal to the rivers are restricted. For construction camps, there are ample spaces in the area that the Contractor can select to set them up.

## 6. Alternatives

80. Two alternatives were considered in this IEE:

- (i) Zero option - inaction / do nothing
- (ii) The road reconstruction project

The “Zero option” alternative scenario will mean that the road stays “as is”, in which no rehabilitation works. Considering the mentioned reasons and along with those presented in the “Country and Regional Strategy” and “Locality Specific Rationale”, the benefits of rehabilitating and reconstructing the road generally outweigh the expectations of the “zero option” alternative.

The second Alternative is considering the road reconstruction for the Category II which will be on the existing road in the section Kochkor (Km 64) to Epkin (Km 89).

## 7. Traffic Volume

81. Results of the Manual traffic for road section counting converted into AADT by each vehicle type (Year 2015) in view of seasonal and daily correlation is shown in the Table 10<sup>1</sup>.

**Table 10: Results of Manual Traffic Count (2015)**

| Section | Name of the section  | Vehicle Type                              | Car  | Light Bus/ Van | Medium Bus | Large Bus | Light Truck Pick Up | Medium Truck 2-axle | Heavy Truck 3-axle | Truck trailer | Truck Semi trailer | Total |
|---------|--|---|------|----------------|------------|-----------|---------------------|---------------------|--------------------|---------------|--------------------|-------|
| 1B & 2A | Kochkor 62+580km – Epkin 89km & Epkin 89km – Bashkugandy 159+274km | Counting result                           | 1359 | 128            | 91         | 3         | 40                  | 48                  | 72                 | 55            | 35                 | 1831  |
|         | -  | Day/Month Factor (Tuesday/August) = 0.885 |      |                |            |           |                     |                     |                    |               |                    |       |
|         | -  | AADT                                      | 1203 | 113            | 81         | 3         | 35                  | 42                  | 64                 | 49            | 31                 | 1620  |

82. As per estimate in the traffic study, the growth rate is as follows: (i) 2011-2024 = 4.2%; (ii) 2025-2029 = 3.7%; (iii) 2030-2035 = 3.2%; and (iv) 2036-2040 = 2.8%. After adding the diverted traffic and applying the growth rates the future traffic are around 2,434 cars. Comparing this value with Road Classifications for Kyrgyz Republic, it shows that Category II road will be sufficient to service the future traffic.

## 8. Proposed Schedule for Implementation

83. The schedule for the construction activities is at preliminary stage. The detailed design consultant will have to be recruited who will undertake the necessary design finalization along with all the contract documents. This IEE will form a part of the contract with specific provisions to form part of the Technical Specifications. The anticipated start of construction will be in 2018. All construction period will take 2 years and plus 1 year for technical guarantee.

<sup>1</sup>This is part of the Economic Report for this PPTA

## **D. Description of the Environment**

### **1. Topography, Geology and Soils**

84. The road section "Kochkor (Km 64) to Epkin (Km 89)", starts west of Kochkor village which is part of the Kochkor District. This part of the Kochkor valley is described as a cavity with a base altitude 1800-2500 m, length of 80 km, and a width of 20 km. The general area can be considered as steppe environs with fragments of forests and meadows. Near the road, agriculture and animal herding are the main activities. From km 64 - km 92 is well laid within the Kochkor depression, oriented east-west direction. The surface of the valley is flat, with slight wavy longitudinal profile. Elevations fluctuate over at 1856 – 2250 m above sea level, the growth occurs in the direction of the pass Kyzart.
85. The territory of Kochkor District is vast tracts of agricultural lands devoted to farming and animal stock-raising. Kochkor valley is limited to in the north by the Kyrgyz from the south Karagatty Kyzart Mountain Ridges. The mountain area has highly broken relief with high slopes. The difference of elevations in the valley varies from 1,700 to 2,400 meters, the mountain areas from 2400 to 4502 m. The terrain is characterized as undulating and mountainous and covered with grasses suitable for grazing. The roadside terrain is mainly grassland devoted to animal grazing. Local vegetation is sparse, however in some parts of the road are lined with trees (mainly poplars, elms and black locust).

### **2. Climate**

86. Much of the Naryn regions are ridges. The climate is continental; winter is cold and long. The-lowest absolute temperature gets as low as - 45°C (below zero). The summers are short and cool. There are several climatic zones in the area: (i) at the height of 1400--1600m above sea level - desert, semi-desert; (ii) 1600--1800m, 1800--2000m – steppe; (iii) 2500--4000m subalpine and alpine zone;(iv) above 4000m zone of eternal snows.
87. The average temperature in January is - 15°C. The absolute minimum temperature (-50°C) was registered on the territory of Ak-Sai valley. In the lake Chater-Kël, valleys: the Ak-Sai, Arpa, in the upper reaches of the Naryn, in the basins Son-kul have cold winters, warm summers short. During the day characterized by abrupt changes in temperature may be freezing even in the summer months. Average annual precipitation on the plains is 200-300 mm in the mountains a little more. The period of heavy rainfall in the second half of spring and the first half of summer, when the fall of 30 to 60% of annual precipitation. In the valleys of the amount of precipitation increases from west to east. The snow cover is in the valley of the up to 40 cm, in the mountainous area of up to 80 cm. In Kochkor valley because of strong winds snowfall are rare, and cover is unstable.

### **3. Hydrology, Water Resources, and Water Quality**

88. Naryn region has more than 5,000 rivers and streams. Highland ridges of the perennial glaciers that give rise to many rivers that go far beyond the region. Glaciers are located at an altitude of 4000 m. The total area of glaciers is about 500 km<sup>2</sup>. Most glaciers are located on the ridges of Kakshaal. The largest is the Ak-Sai, Ai-Tal, Ortho-Tash. Also, there are numerous alpine lakes and the biggest of them are Son-Kol and Chatyr -Kol.
89. Within the Naryn region flows the longest river of the country - the Naryn River, which supplies seven hydroelectric power plants. Naryn River is providing a huge flow of water that significantly affects the economic activity not only in Kyrgyzstan, but also Uzbekistan, Kazakhstan and Tajikistan. It flows within the ranges of 10-14 km<sup>3</sup> per year. The most important tributaries of the Naryn River: Small Naryn (407 m<sup>3</sup> / s), On -Archa (160 m<sup>3</sup> / s), Dzhergetal (65.4 m<sup>3</sup> / s), Kok -Gert (Kazhyrty) (64.5 m<sup>3</sup> / s). The Syr-Darya River within Naryn forms the second largest river in Central Asia - the Syr Darya.
90. The eastern watershed before the Kyzart pass forms the catchment that drains into Orto-Tokoi Reservoir via Kochkor River. The main rivers in this area are Zhon-Aryk River that joins Kochkor River at Km 67. The Kochkor River is a river in Kochkor District of Naryn oblast. It is formed by confluence of Karakol and Seok rivers. The river is 45 km long, with the basin area 2,590 km<sup>2</sup> wide and the average discharge 12.6 m<sup>3</sup> per second. Chu River is formed by the confluence of Kochkor River and Zhon-Aryk River near village Kok-Jar.

#### 4. Ecological Resources in Project Area

91. Naryn oblast is considered rich in flora and fauna. Some of the species that thrive are relict Tien Shan blue spruce, herbs: buckthorn, ephedra, zverovoy, yarrow, valerian, wild rose and many others. There are reserves: Naryn and Karatal-Zhapyryk reserves, hunting reserves: Kochkor, At-Bashy, Ugut etc.

##### 4.1 Flora

92. Territory of the Kochkor - Epkin section refers to arable irrigated land on the site of steppes and deserts. According to geobotanical subdivision, the territory refers to Inner Tien Shan province.

Range of vegetation types. Desert: thorn cushion plant, sod-grass steppes, tall grass meadow, cryophilic cushion plant, swamps, spruce forests, leafy summer green forests, deciduous shrubs. And juniper stands. Great area is occupied by primitive plant aggregation with sparse vegetation. Type of belts - deserted - steppe with fragments of forests and meadows.

Dominant vegetation is: Sympegmargeli, Silver willow (*Salix acutifolia*), Sea buckthorn (*Hippophae rhamnoides*), *Geranium regelii*, *Geranium himalayense*, *Kalidium cuspidatum*, *Reaumuria soongorica*, *Acantholimon alata*, *Artemisia tianschanica*, *Stipa caucasica*, *Festuca sulcata*, *Phlomis oreophila*, *Carex stenocarpa*, *Iris halophila* Pall (*Iris sogdiana* Bunge). Out of medicinal plants, there grow Begger's rose, loose rose, Ural licorice.

##### 4.2 Fauna

93. The territory of the project area is desert and semi-desert. By geographical zoning, the territory refers to inner Tien Shan and midland. Representative species of the given territory are:
- (i) Reptiles: desert lidless skink, lizard, arrow-snake, copperhead;
  - (ii) Birds: little owl, mongolian plover, short-toed lark, tawny pipit, common chats, black redstart, rocky nuthatch, desert mongolian finch, roodyshelduck (in reservoirs), bearded partridge, chukar partridge (in open habitats), turtle dove, black-bellied sandgrouse flies;
  - (iii) Animals: great horseshoe bat, sharp-eared owl-moth, tolai hare, sand eel, steppe polecat, stone marten, gray marmot, muskrat (in reservoirs);

#### 5. Endogenous and exogenous processes

94. **Seismic hazard.** According to seismic regionalization of the Kyrgyz Republic territory, the project area relates to 8-point seismic zone (SNiP KR 20-02:2009).
95. **Mudflow hazard.** Mudflow of storm origin may take place in Kok-Zhar rural district by threatening houses, bridges and roads. Mudflow may take place once in two or more years on the major part of the area's mountainous territory. Mudflows of storm origin may happen within April-September, most likely within May-July as shown in Table 11.

**Table 11: Forecast of possible activation of mudflows and floods**

| №  | Rural district | River                                 | Settlement       | Facilities that might be affected |
|----|----------------|---------------------------------------|------------------|-----------------------------------|
| 25 | Kok-Zhar       | Mudflows, right bank, Zhon-Aryk River | Kok-Zhar village | houses, homestead lands           |

Source: MES KR website, 2015

96. **Flooding.** Areas with high levels of groundwater are confined to lower terraces of Zhon-Aryk River' valleys as shown in Table 12.

**Table 12: Forecast of possible development of flooding processes**

| <b>№</b> | <b>Rural district</b> | <b>Settlement</b> | <b>Flooding reasons</b> | <b>Recommended safety measures</b>         |
|----------|-----------------------|-------------------|-------------------------|--|
| 62       | Semiz-Bel             | Chekildek village | High ground water level | Lowering of ground water level             |
| 64       | Cholpon               | Cholpon village   | High ground water level | Construction of collector drainage network |
| 66       | Cholpon               | Epkin village     | High ground water level | Construction of collector drainage network |

Source: MES KR website, 2015

## **6. Socioeconomic Information**

### **6.1 Regional Information**

97. Naryn Oblast is situated in the southeast of Kyrgyzstan is bordered on the east by the Issyk-Kul, in the north - Chui, in the west - Jalal-Abad and Osh provinces in the south - with China. The region consists of 5 districts (Ak-Talaa, At-Bashy, Jumgal, Kochkor Naryn). Naryn City is the administrative center of the region and the largest city in the Inner Tien Shan. Its total land area is 45.2 thousand square kilometers, accounting for 1/4 of the territory of Kyrgyzstan, and with 249.1 thousand people, which is 5.2% of the country's population.
98. The Oblast's main imports include industrial chemicals, metals and machinery, while the exports are comprised of livestock, livestock products including hides, minerals, textiles and textile products. The main livelihood in Naryn Oblast is engaging in animal husbandry or agriculture. Private farms cover less than 5% of the utilized land area of the Oblast, with significant overgrazing in many places as distant pastures are not accessible due to poor road networks.

### **6.2 Local Information**

99. The Section - "Kochkor (Km 64) to Epkin (Km 89)" - of the project road passes through the several villages of Kochkor Rayon. Basic social infrastructures are available in these villages, such as drinking water, and electricity. For heating, local people use coal and firewood. All of the villages have schools, with kindergartens in large villages.
100. Village Medical Points are found in every village and in rayon centers there are hospitals. Transport infrastructure is the main road with an asphalt surface (cold asphalt) and dirt roads. The bulk of the population is engaged in agricultural activities and livestock. The main products are wheat, potatoes, barley, meat, milk, wool, eggs.

## **7. Cultural and Archaeological Resources**

101. There are several objects of cultural and historical significance in the project area. One notable item though is the presence of burial sites and cemeteries along the road. It is important that the road design and consequently the construction will ensure that impacts will be avoided or minimized.
102. To obtain more detailed archaeological, cultural and historical information, a local specialist was engaged by PPTA to undertake this scope. This specialist had conducted a separate field work and presented his findings in a report.
103. In March 2016, an archaeological investigation was performed by a local archaeologist historical and cultural heritage sites and objects in the vicinity of the project within the territories of Ton district of Issyk-Kul, and Kochkor and Jumgal district of Naryn oblast, Jaiyl district of Chui oblast in accordance with the Technical instructions and norms of the method of archaeological investigations<sup>2</sup>.
104. Within the section (89 km) the significant archaeological resources consist of eight (8) objects presumably stone-earth mounds of early nomads made up of mainly of small size gravel with a height from 0.2 to 0.7 meters and a diameter of 4 to 11 meters. These artifacts are located about 80-100 meters south side of the road south-west of the village of Cholpon

<sup>2</sup>Provisional Regulations on the procedure of the archaeological survey. Approved by Decree of the Government on July 11, 2014 under the number 386; Avdusin DA Field Archaeology of the USSR, 1980. - p.58-113.

(or LHS from the road) in Kochkor district (coordinates 42.18314 E75.45456 of N) between arable agricultural lands (see Photos below). Due to its distance, it would not be directly affected by construction activities. However, the Contractors should be informed of their presence and be instructed to avoid any disturbance to this area as shown in Figures 4 and 5:



**Figure 4: Location of Archaeological Resources near Cholpon village**



**Figure 5: Actual Archaeological site near Cholpon village.**

105. Based on the results of the research, report has been prepared, which was sent to the Ministry of Culture, Information and Tourism of the Kyrgyz Republic (MoCIT KR) for opinion (Appendix F). This object of historical and cultural heritage is the object of study and protection of MoCIT KR. To prevent exposure to this object it is necessary to develop Management plan for object of cultural heritage, according to the law protection zone of object is not less than 50 m. Therefore, all questions related to the establishment of protection zones, procedures, management plans should be coordinated with MoCIT KR and local government.
106. On the basis of the findings (Appendix F), during the detailed design, Consultant should send the road design along with the Management plan for object of cultural heritage for coordination with MoCIT KR.
107. In accordance with the Law of the Kyrgyz Republic on historical cultural heritage (art. 32, 33) in the event of cultural monuments found, all construction works must stop and report the findings to the local executive authorities or any other competent organization (Institute of

## **8. Sensitive Receptors**

108. Sensitive receptors are those areas where the occupants are more susceptible to the adverse effects of exposure to contaminants, pollutants and other adverse substances that the activities may generate. These generally include, but are not limited to, hospitals, schools, bazaars, mosques/churches, convalescent facilities and cultural, historical or archeological sites. Such facilities along the project road section as referred to in the alignment sheet are:

- (i) Kok-Zhar village (km 67+500) – near the school along the road, LHS;
- (ii) Chekildek village (km 70+000) – near the school, LHS;
- (iii) Epkin village (km 88+100) – near the mosque, LHS;

*It is noted that all residential buildings are located always not less than 20m away from the edge of car lanes.*

(iv) Cemeteries:

- 68 km Cemetery on the (RHS) 2-3 m away from the road
- 70 km Cemetery (LHS) 2-3 m away from the road.
- 83 km Cemetery (LHS) 50-70 m from the road.

109. Aside from the possible impact due to noise, dust, vehicular emissions during construction and operations of the project, public safety can be a concern when trucks, equipment and construction materials are brought to the sites near these sensitive receptors. Disturbances may occur during class hours and treatment period and traffic safety may be a concern with hazards to children as they walk or commute to and from schools.

## **9. Baseline Measurements**

110. Baseline measurements in water quality, air quality and noise/vibration were obtained in selected spots. Water quality measurements were obtained where construction will impact river quality. Air quality and noise/vibration measurements were done in likely receptor areas. These results shall be used as reference parameters in monitoring the impacts of construction and operations of the project. International standards were also presented herewith for comparison with Kyrgyz standards; subsequently the more stringent standards shall be used as monitoring requirements.
111. Water quality and air quality measurement were done by the Ecological Monitoring Department of the SAEPP. While noise and vibration measurements were done by the Department of the sanitary protection of the Ministry of Health.

### **9.1 Water Quality Measurements**

112. As baseline data in water quality, it was decided that measurements would be done for the most relevant parameters: Turbidity and Total Petroleum Hydrocarbons (TPH). Therefore, the contracted laboratory was instructed to obtain the measurement in bodies of water adjacent to or being crossed by the project road. Within the section Kochkor (km 64) to Epkin (Km 89), water body crossing the road is Zhon-Aryk River. Water quality measurement of Zhon-Aryk River was taken within Kok-Zhar village. It was observed that the downstream areas of Zhon-Aryk River utilize water from the river mainly for agriculture and domestic uses. Drinking water is obtained from installed wells and from springs. The results of such water quality testing are shown in Table 13.



**Table 13: Water Quality Measurement Parameters the Section**

| No   | Locations | Km in Road | Turbidity cm                      | Oil Products, mg/l                       |
|--|-----------|------------|-----------------------------------|--|
| <b>Maximum Permissible Concentrations (MPC)</b>          |           |            |                                   |  |
| <b>According to national requirements</b>                |           |            | <b>Not less than 20</b>           | <b>0.3</b>                               |
| <b>According to EC legislation</b>                       |           |            | <b>Not less than 100 cm/depth</b> | <b>Not visible in the form of a film</b> |
| Zhon-Aryk River in Kok-Jar village, bridge (km 67 + 000) |           |            | 43                                | <0.05                                    |

Note: Measurements done in Nov. 30 – Dec. 3, 2015, Annex E.

## 9.2 Air Quality Measurements

113. Measurement results will serve as reference values for monitoring during the construction phase. Air quality was measured at 3 points along the road, which were identified as areas sensitive to air pollution due to the proximity of schools, street markets and other special facilities.
114. In the project area, there is no large industrial source of pollution affecting the air quality, but it is influenced by dust from cars. The nearest station air quality monitoring from the project area is located quite far away - in Tokmok (Chui valley) and Cholpon-Ata (Lake Issyk Kul). Naryn region has no air quality monitoring stations.
115. Most of roads are located along foothill and mountain areas with the perimeter surrounded by mountain ranges. The height of the terrain within 700-3615 m above sea level. Within the territory dominated by wetlands are dotted with sparse vegetation.
116. The only source of dust, noise and vibration is road transport. The content of inorganic dust in the air due both to climatic conditions of the region and with the movement of vehicles. For air quality, the most relevant parameters to be measured would be Dust, SO<sub>2</sub>, and NO<sub>2</sub>. Accordingly, the contracted laboratory was instructed to obtain the measurement in populated areas along the project road. The results of such air quality testing are shown in Table 14.

**Table 14: Air Quality Measurement Results**

| No.                                       | Measurement Point Locations                  | Chainage | Air Quality Parameters (mg/m³) |                 |                 |
|---|--|----------|--------------------------------|-----------------|-----------------|
|   |  |          | Dust                           | SO <sub>2</sub> | NO <sub>2</sub> |
| Maximum Permissible Levels (KR standards) |  |          | 0,5                            | 0,5             | 0,085           |
| Maximum Permissible Levels (IFC)          |  |          | -                              | 0,02            | 0,04            |
| 1   | Kok – Zhar, near the Rakhat shop, LHS        | 71+600   | <0.26                          | <0.05           | <0.02           |
| 2   | Chekildek village, near the shop Ak Jol, RHS | 71+600   | 0.28±0.07                      | <0.05           | 0.023±0.004     |
| 3   | Epkin village, near the mosque, LHS          | 88+100   | 0.28±0.07                      | <0.05           | 0.017±0.003     |

Note: Measurements done in Nov. 30 – Dec. 3, 2015, Annex E.

## 9.3 Noise and Vibration Measurements

117. The main sources of the noise in the study area are those generated by vehicle engines, especially those carrying heavy loads running over unpaved road and at low speed. This noise is also aggravated by the noise of friction of tires on the road surface. Since there not many settlements in the area, noise is not a major problem. All noise measurements were taken at 3 m from the roadside near the settlement.
118. The noise level is expected to decrease rapidly with distance from the road, all noise measurements were taken at 3 m from the roadside: at a distance of 8-9 meters from the road where reconstruction will be done, noise level drops to a level less than 60 dB (A), i.e. up to the recommended maximum level at night for the populated areas. According to the regulations limits outside noise from road transport is 80 dB(A) for vehicles with an engine capacity of 150 kW or more. When measuring noise in the environment as it is necessary to measure the wind speed, air temperature, barometric pressure, altitude and time data recording of the measurement (e.g., day or night).



119. Vibration is a danger to human health and the environment and mainly generated by transport, construction equipment, industrial facilities and other sources. In the area of the planned works, vibration occurs when operating heavy vehicles. The most effective vibration shield can be realized at the stage of designing the project. When designing the vibration parameters will govern: sanitary and technical standards for vehicles and vibration sensitivity for building structures.
120. Normally, as a means of protection against vibration effects on the environment is the usage noise protection wall or fence of varying heights. Low construction near the tracks can significantly reduce vibration exposure. The simplest and most effective is the usual earth mound with upset it shrubs, which also serves as a sound absorber, and at the same time strengthens the roots of the earth mound.
121. The enforcement of the standards of pollution noise and vibration lies with the Department of Sanitary and Epidemiological Surveillance Ministry of Health of the Kyrgyz Republic. The measurements were done for points at 3 m from the roadside. The noise and vibration levels are below the prescribed limits as shown below.

**Table 15: Noise and Vibration Measurement Result**

| No.   | Measurement Points                           | Locations | Aspects    |       |               |
|---|--|-----------|------------|-------|---------------|
|   |  |           | Noise, dBA |       | Vibration, dB |
|   |  |           | Day        | Night |               |
| KGZ Maximum Permissible Levels                |  |           | 70         | 65    | 108           |
| IFC Guidelines:                               |  |           |            |       |               |
| - for Residential; institutional; educational |  |           | 55 (58)    | 45    |               |
| - for Commercial & Industrial                 |  |           | 70         | 70    |               |
| 1   | Kok – Jar, near the Rakhat shop, LHS         | 71+600    | 57         | -     | 90            |
| 2   | Chekildek village, near the shop Ak Jol, RHS | 71 + 600  | 68.1       | -     | 91.1          |
| 3   | Epkin village, near the mosque, LHS          | 88+100    | 67.3       | -     | 91.2          |

Note: Measurements done in Nov. 30 – Dec. 3, 2015. Annex E (58) is a modified IFC Guideline based on the background

## **E. Environmental Impacts and Mitigation Measures**

### **1. Impacts in the Project Phases**

122. For the Section Kochkor (km 64) to Epkin (Km 89), the construction entails a number of activities which are expected to introduce impacts and disturbances to the general environment, especially during the construction period. Most of these impacts are confined within the right-of-way, construction sites, and facility sites; while some activities can affect the outlying areas or even a wider area, especially if not properly mitigated.
123. The environmental impacts and mitigation measures presented in this IEE Report were based on the results of the conducted field surveys and numerical prediction. The Section Kochkor (Km 64) to Epkin (Km 89) will entail upgrading of road along its existing alignment. In some spots, road runs close to sensitive receptors such as schools, mosques, bazaars, historical and archaeological sites or others. It is anticipated that main impact categories will be due to the following activities: (i) construction works within or close to settlements result in noise, vibration impacts, emission of pollutants to air and vibration which is especially of concern when the project road comes close to sensitive receptors, (ii) site clearance activities result in loss of top soil and vegetation structures, (iii) aggregate sourcing, crushing of aggregates and asphalt plant operation may have severe impacts in case of unsuitable site selection or management. Additional impacts refer to (iv) impacts from bridge rehabilitation/construction, (v) potential impacts on surface waters and potential impacts on natural habitats and biodiversity. The main impacts from reconstruction of the road are described below.

#### **Air pollution**

124. During construction concentration of toxic substances in air depends on a type of automobile engines (carburetor, diesel), on engine power, traffic density and possibility of distribution of these substances in air. Concentration of harmful products in the air decreases as the distance from the carriageway grows and it depends on wind speed and direction and on value of incoming solar radiation. As is same for the case of noise and vibration basically. Upon the start of reconstruction of the road, air might be polluted by exhaust emissions of construction equipment and dust. Both factors will be of short duration and will have minimal impact on people (excluding builders, who must wear protective masks), since the distance to the receptor (residential buildings) from edge of car lane, where equipment moves, is more than 20m.
125. Construction machines and machinery are sources of emission of pollutants during construction: exhaust gases (CO, NO<sub>x</sub>, SO<sub>x</sub>, etc.) coming from trucks, construction machinery; dust generated due to vehicular traffic, operation of equipment, upon excavation and welding.
126. During the construction, those equipment and machinery emit the following pollutants into air:
- Carbon Monoxide;
  - Hydrocarbons;
  - Nitrogen Dioxide;
  - Soot;
  - Sulfur Dioxide;
  - Inorganic Dust
  - Benzopyrene
127. Dust will be generated due to vehicular traffic, operation of equipment, upon excavation and welding. To determine hazard category of the facility, it is necessary to estimate the hazard category in accordance with the KR Law "General technical regulations to ensure environmental safety in the Kyrgyz Republic".

While studying and considering similar construction work during reconstruction of roads, hazard category of the facility was determined as II, III.

The II hazard category requires calculation of pollutants' dispersion in ambient air to determine dispersion distance and maximum ground level concentration of harmful

substances. For the category III, hazards defined by calculation of emissions mass are design values and used as maximum permissible emissions. Short-term impact is expected.

128. Given the linear stretch of the road to be reconstructed, the entire road machinery will concentrate on construction site.

During operation, basic impact is related to traffic intensity.

The main pollutants are:

- Carbon Monoxide;
- Hydrocarbons;
- Nitrogen dioxide;
- Plumbum.

Atmospheric air pollution depends on traffic density. According to conducted calculations, planned traffic density will be 6,231 vehicles per day in 2030. Having studied and considered various similar calculations to determine pollutant emissions under various traffic intensity during the operation period, we can conclude that maximum ground-level concentrations of pollutants at a distance of 3 m to 5 m from the road will not exceed the maximum permissible concentration. Long term impact is expected.

129. Air pollution along the road, 6m away from the road centerline was predicted during operations and construction respectively as in Table 16:

**Table 16: Prediction of Air Pollution along Project Road**


| Year                            | Stage                  | Monitored<br>or predicted | Daily traffic<br>no. | Traveling<br>speed | NO <sub>2</sub> | Dust  | SO <sub>2</sub> |
|---------------------------------|------------------------|---------------------------|----------------------|--------------------|-----------------|-------|-----------------|
|                                 |                        |                           | No.                  | km/h               | ppm             | ppm   | ppm             |
| IFC Standard                    |                        |                           |                      |                    | 40              | -     | 20              |
| National Environmental standard |                        |                           |                      |                    | 85              | 500   | 500             |
| 2016                            | Before<br>construction | Monitored                 | -                    | -                  | (20-30)         | (280) | (<50)           |
|                                 |                        | Predicted                 | 1,620                | 60                 | 30              | <280  | <50             |
| 2017                            | During<br>construction | Predicted                 | 1,756                | 60                 | 31              | <280  | <50             |
|                                 | After<br>construction  | Predicted                 | 4,190                | 100                | 34              | <280  | <50             |
| 2020                            | After<br>construction  | Predicted                 | 4,726                | 100                | 35              | <280  | <50             |
| 2030                            | After<br>construction  | Predicted                 | 6,231                | 100                | 37              | <280  | <50             |

() monitored figures by Kocks at the distance 3m from road edge 15m is the minimum ROW width from road centerline  
 "Dust" was included in "SPM" in the table.

As shown in the above table, no air pollution is caused by passing vehicles during construction and operation periods except SO<sub>2</sub>.

130. Dust is generated by unpaved road mostly and the portion emitted from vehicles is negligible to this 280 ppm. Therefore, no additional mitigation measures are required since dust concentration will be reduced even if vehicle number increases after paved in the future.
131. "Falling dust" generated by earth work and lorry passing over unpaved road at the location 20 away from car lane edge is 2 ton/km<sup>2</sup> and no prevention measure is required.
132. Other than at along road, air can be polluted at the locations of asphalt/concrete batching plants, rock crushing plant, soil/rock borrow pits and material stock piles by their activities such as mixing of aggregate, crushing stones, sieving sand, heating bitumen and excavation of soil/rock etc., although these shall be located sufficiently away from settlements.

133. Concentration of NO<sub>2</sub> during construction was estimated vs distance from road, taking into account of equipment, trucks and public traffic, using safety side assumption, and plotted versus distance from the edge of car lane as Figure 6.

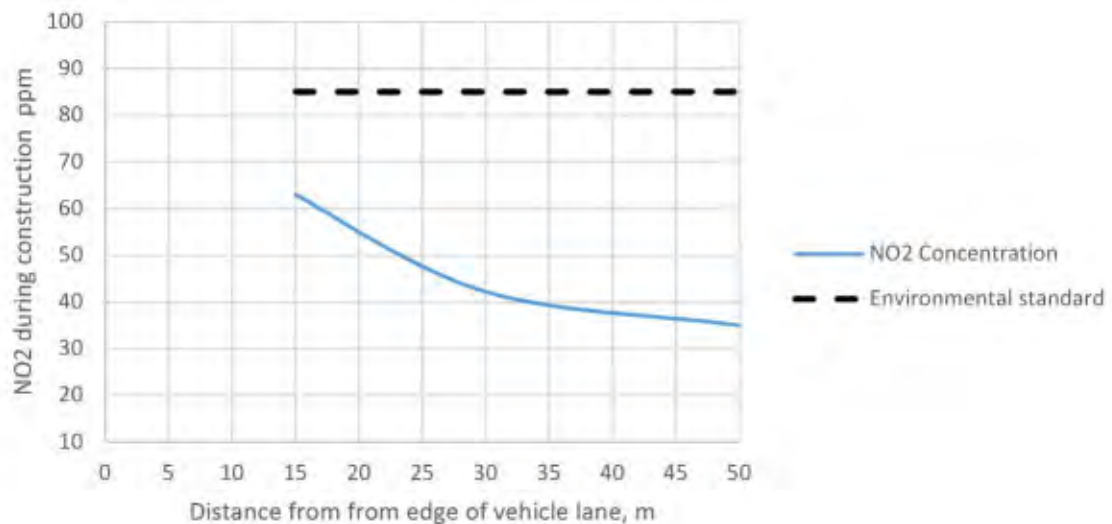


**Figure 6: Simulation of NO<sub>2</sub> concentration during Construction**

As shown in the above, concentration of NO<sub>2</sub> is accepted within the area farther than 20m from the edge of the car lane during construction and no special measures are required, other than conventional ones


#### Noise impact

134. Noise level is different depending on the distance, as well as air pollution, between the receptor and source of noise(vehicle), type (truck or sedan) of the vehicle, traveling speed, number of passing vehicles, background level, weather conditions, etc. Considering these factors, noise level vs distance from edge of car lane, depending on the vehicle speed, using the vehicle numbers after operation in the year of 2030 when largest no. of vehicles is travelling, was estimated as Figure 7.

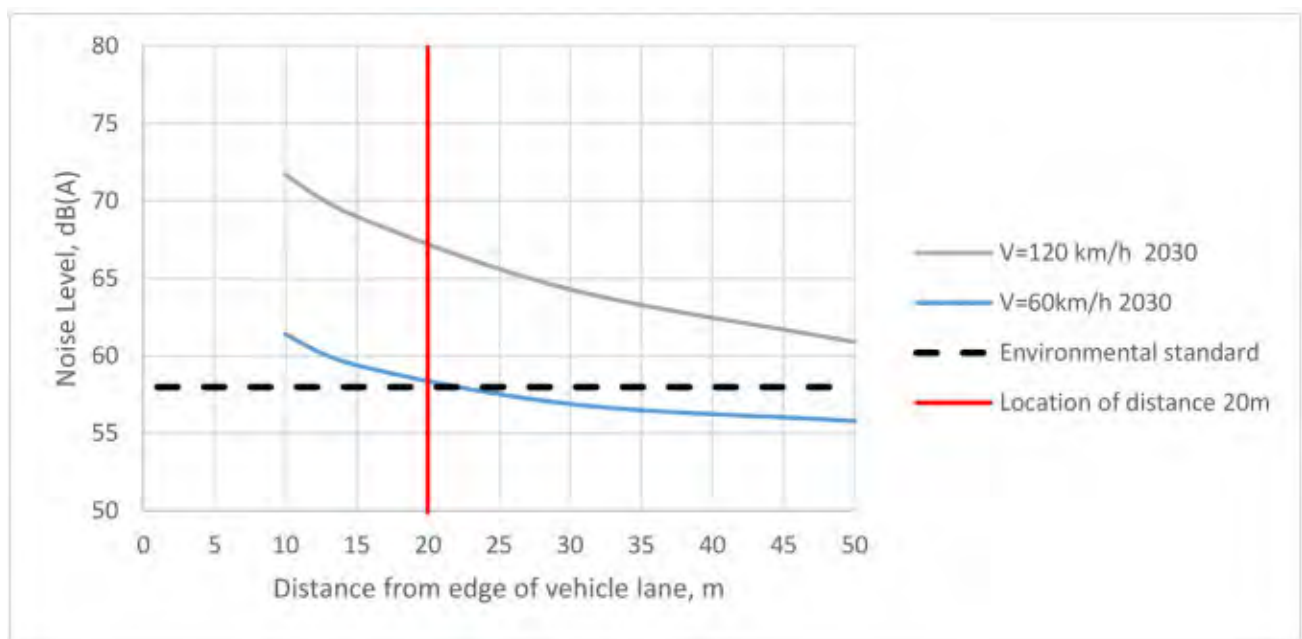

**Figure 7: Simulation of Traffic Noise Level depending on Vehicle Speed**


135. Noise level allowed for residential area is 55-60 dB(A) in KR guideline while World Bank specifies 55 dB(A) only (or background +3 dB(A)). In the above figure, an allowable level of 58 dB(A) were chosen, based on more strict guidelines of World Bank than as of KR, considering the actual background level of 55 dB(A) as monitored. As shown in the above figure, noise level predicted is always greater than allowable limit of 58 dB(A) until 50m, at least, from the edge of car lane when the vehicle driving with speed of 120 km/h of design speed while it is almost less than the limit when the vehicle be driving with 60 km/h. Therefore, the mitigation measure to be proposed during operation is to limit the traveling speed of vehicles 60 km/h only for residential/sensitive areas.
136. Next figure is the simulation of noise levels until 2030 using driving speed of 100 km/h for references.

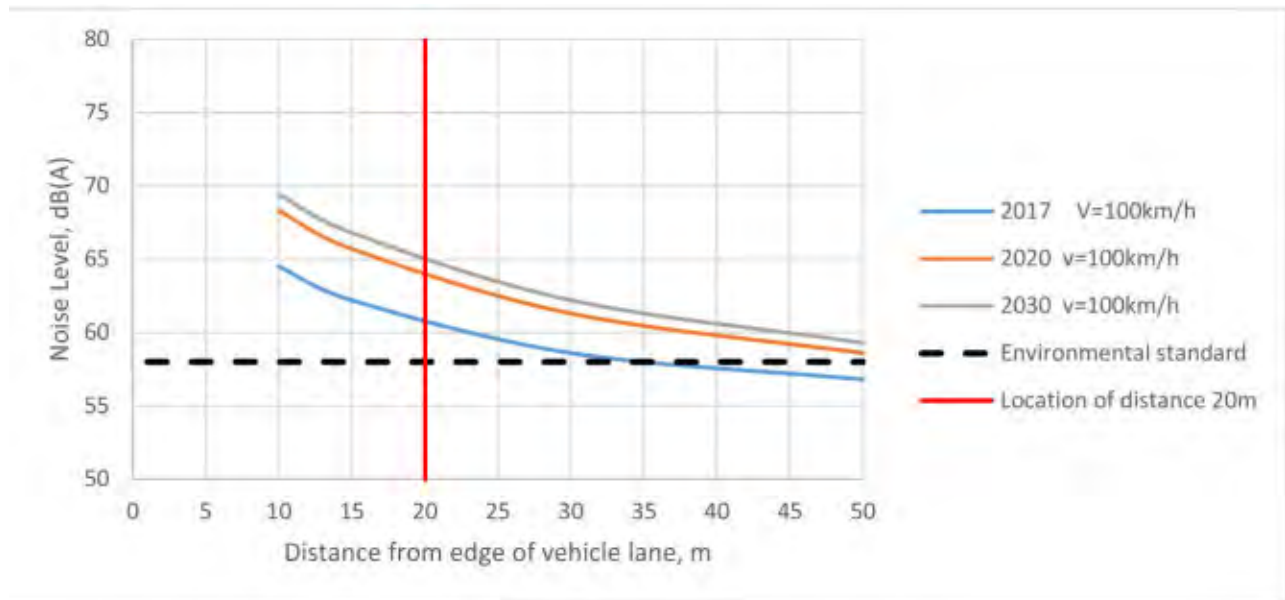

**Figure 8: Simulation of Traffic Noise Level depending on the year**

Growth of vehicle number is assumed 4% each year for safe side. Similarly, traffic noise level is a serious issue at least until 2030 as well if the vehicles drive around with this design speed.

137. Within the period of construction works, sources of non-continuous noise are running engines of construction and road-building machinery. Sound is expected to generate at the construction site upon operation of construction equipment, delivering of building materials, digging of trenches and pits, removal and delivery of soil etc. In this project, an environmental standard of noise during construction was set, as per the guidelines of Word Bank, as 70 dB(A) during day time of short time compaction period. No construction work is proposed at the nigh time.
138. Along the road, noise levels vs distance during construction in 2017 was simulated assuming typical construction work sequence with highest power level reasonably applicable, together with the case of installation of noise barrier, 3m high and 6m away from edge of car lane, as Figure 8.

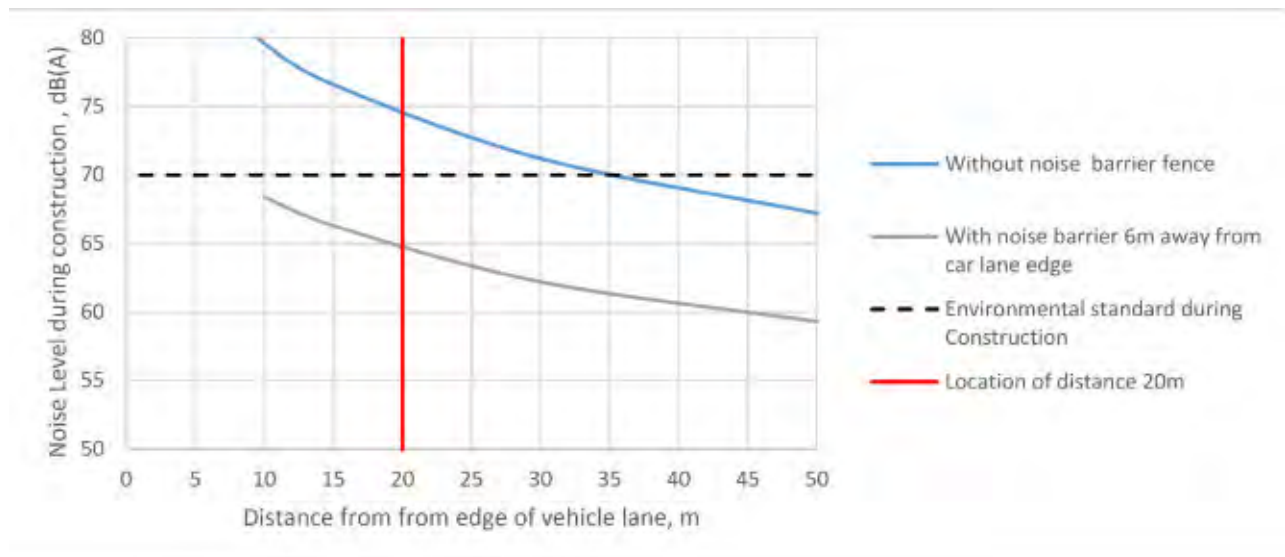

**Figure 9: Simulation of Noise during Construction with/without Mitigation Measures**

139. As shown in the figure, following can be concluded:

- a. The construction noise level is estimated to exceed the proposed environmental standard set for during construction, until the location of distance 35m from the edge of car lane, within which, there are residential houses/ sensitive receptors (school) in the villages and residents/ students there may be annoyed by these high-level noises during construction.
- b. Generally, the primary source of construction noise is of embankment compaction machine at operation and, secondary, of dump tracks and of existing public traffic.
- c. Therefore, the most effective mitigation measure is to suppress the transmission of noise from the main noise source, compaction machine, to the receptors at the moment of compaction machine being operated in front of the residential houses/sensitive receptors.
- d. To achieve this, tentative installation of a noise barrier at the distance 6m away from the car lane only at the time of compaction activity among all construction activities. The noise barrier can be a 3m high plastic sheet wall, supported by the frame of scaffold pipes. This wall can be easily removable and the cost shall be minimal.
- e. Locations of possible residential house/sensitive receptors are:
  - (i) Kok-Zhar village (km 67+500) – near the school along the road, LHS;
  - (ii) Chekildek village (km 70+000) – near the school, LHS;
  - (iii) Epkin village (km 88+100) – near the mosque, LHS;
- f. As a practical procedure for installation of plastic sheet wall, (1) the actual relationship of noise levels of compaction machine versus distances to the receptors shall be established by monitoring at the site, (2) distances of the sensitive receptors shall be identified in each village, (3) noise levels at each receptors estimated based on the actual noise vs distance curve, and (4) a plastic sheet shall be held along the road if the noise level exceeds 70dB(A) during compaction activity in from of the receptors. The noise barrier is removed away right to next location after embankment compaction there.
- g. Those who are stationed at the stretch between car lane and barrier, such as street vendors and (illegally ROW encroaching) kiosk shop keepers, if any, are advised to move out there only when construction equipment (dozer or compactor) is working just in front of them and the noise is not endurable for them. Number of this Kiosk is very less. Thus, although the construction noise level is moderate, it is mitigatable.
- h. From the experience of implementation of the road rehabilitation projects in other areas, if used a vibratory roller without vibration and apply measures for dust suppression on the effects of excess in the area of sensitive receptors, noise and pollutant concentrations in the ambient air are not marked. In this regard, plastic protective barriers are applied in case of

excess of the actual parameter data.

- i. If necessary, at the discretion of the construction supervision Consultant can be made more monitoring points near sensitive receptors.
- j. Other than along the road, noise from batching plants/crushing plants and borrow pits can be the issue. They are supposed to be located at isolated area away from human settlement as per SSEMP.

### **Vibration**

140. Vibration levels were monitored place to place in Feasibility Study Stage and the results were in the range of 91-93dB(A) (acceptable level is 108 dB(A)), as is so high level already, and no vibration higher than this level is estimated in construction activity except blasting. Thus, no special attention/measure is required other than routine environmental protection procedure, such as equipment maintenance, no idling, restriction of operation hours, etc. However, if the actual vibration caused seems to be unendurable for receptor, proper measures have to be taken as well.

### **Surface water**

141. During construction period, surface waters may be polluted due to discharging of runoff water over untreated embankment and domestic wastewater, flowing of chemical and mechanical pollutants from the road into water. Some pollution of surface water may result from spills of fuel and lubricants from equipment and containers to streams by washing in the river. It may also be polluted during construction and reconstruction of bridges.
142. Out of common pollutants of water bodies, the biggest concern may cause penetration oil productions into water. First signs as individual colored spots appear already when upon spilling of 4 ml/m<sup>2</sup>. Maximum permissible concentration for oil products is 0.1 mg/l - 0.3 mg/l according to Kyrgyz standards while it is "not visible in the form of film" according to IFC Standards. To prevent contamination of surface and groundwater, it is necessary to provide mitigation measures, which will be described in the Environmental Management Plan (EMP).
143. During the construction period, water bodies will be affected upon repair, widening of 4 bridges and 35 culverts will be replaced. This impact will be expressed in possible contamination by soil, remaining parts of pipes, concrete debris, oil products, oils and by debris. During operation period surface water will not be polluted, except for extraordinary emergencies.

### **Contamination and erosion of soil**

144. During the construction period, asset of work processes associated with construction of roadbed usually causes the damage to environment. Soil contamination is first observed on lands temporarily used as borrow pit, construction site as well as on the road being reconstructed. Soil might be also contaminated by installation and operation of asphalt concrete mixing plant.
145. Soil is mainly contaminated due to precipitation of solid and fine silt fractions of particles to pavement from air. Such particles are brought by car wheels from roads and driveways with unimproved pavement, partial loss of transported loose soils, tire and pavement abrasion, as well as by toxic components of exhaust gases of cars.

Soil might be contaminated by oil coming from construction equipment. Such impact might be reduced, if machinery is maintained in good condition by proper disposing of used oil. Soil shall be slightly eroded in the roadside due to road reconstruction, since major work is executed on the existing road with protective works in the drainage system.

146. During the construction period, impact will be generated in the form of loss of topsoil in areas adjacent to the road, garbage, spills of oil products and oils. During the operation period, the soil will be contaminated by engines exhaust emissions containing lead compounds.



### Impact of Reconstruction of Culverts


147. Upgrading of existing culvert is one of the scope of the project. There are 44 road crossing culverts and 5 road side culverts as summarized in Annex A3. Their roles are quite important to ensure the local irrigation system for agricultural land and drainage system in the settlements area. Due to recent increase of demand from agricultural area, the importance of these drainage system has been increased. It is necessary to upgrading the capacities of these drainage system to meet the today's demand. However, to replace/upgrade these outdated culverts, many debris of concrete/metal wastes can be generated at demolishing them. Treatment of these debris is an environmental issue.

### Impact to Existing Powerline/Pylons

148. Powerlines are running along and, sometimes, crossing the road overhead as summarized in Annex A4. It was noted that some pylons are located inside ROW, the road rehabilitated range, and they have to be moved out. Even if outside of ROW, some pylons that are erected on the shoulder of hill, where the foot of the hill is designed to be cut carelessly for road enlargement, then the stability of remained slope are risked to collapse, together with pylons on the remained slope.

### Groundwater Contamination

149. Groundwater is vulnerable to the oil pollution. Gasoline/diesel can percolate through soil into groundwater more easily than water if oil has been leak on the ground surface. Once groundwater has been polluted by gasoline for example, gasoline persists there very long time and, for the worse, the contaminated plume expands to the direction of groundwater flow. Simulation of expansion of the contamination plumes presented in Figure 9 as per ASTM E1735 Standard Guide for Risk-based Corrective Action at Petroleum Released Site. Above was simulated assuming groundwater has been contaminated as 1 ppm only spilled location and groundwater flows 0.5m/day after 1 year of contamination.

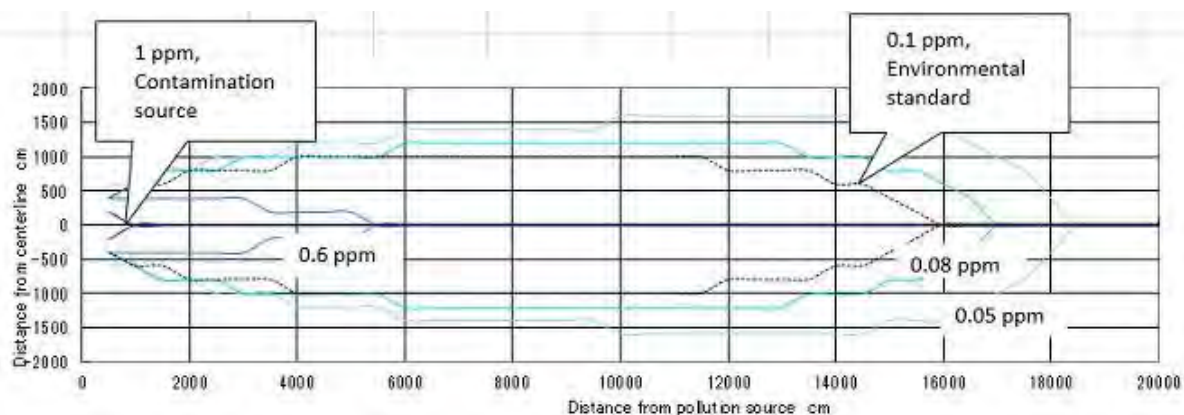

**Figure 10: Simulation of Gasoline Contaminated Plume in Groundwater**

As shown in the figure, although the groundwater at the source of contamination is 1 ppm only, contamination plume of groundwater, greater than 0.1 ppm of KR standard, expands as far as 150m from the source of spill. In another word, hand pump well water cannot be use for drinking until 150m from the source at least. Again, it is emphasized that, although the contamination of groundwater as 1ppm (1cc gasoline per 1m<sup>3</sup> water) seems nothing, the influence is disastrous. Any percolation of gasoline into ground shall be prevented first of all.

### Flora and Fauna

150. During the construction period, reconstruction of road may cause insignificant impact on flora and fauna due to accident going of construction machinery beyond the construction site. There might be observed the following factors as well:



- Factors that prevent natural migration of species to temporary and permanent habitats, exchange of gene pool, reproduction, etc. They are road construction elements - slopes, embankments, excavation, grading, fence and roadbed.
- Anxiety factors that frighten animals and violate their habitat are noise, vibration, light from the traffic flow. As we know animal's reaction to disturbance factor may differ according to species. Collision with oncoming traffic can cause death of fauna representatives on roads. All these factors lead to decrease in number of populations.

151. Given that the road had existed for a long time before reconstruction, established way of wildlife habitation in adjacent territory, we can assume little additional impact on flora and fauna, which will be caused by road reconstruction.

Within the alignment, there are trees that will be affected. In the preliminary assessment, the estimated number of trees to be affected is 38. Impact on flora and fauna will be minor during operation period.

### **Social environment**

152. During construction, the most dangerous type of transport pollution is emission of exhaust gases into air, noise, vibration, and electromagnetic radiation. When mitigation activities are properly carried out, this negative impact will be reduced. Impact of construction process will last for relatively short time, though there may occur accidents due to the poor state of the road. In general, the effect on the social environment of the road reconstruction project will only be positive. During construction period, there will be creation of many jobs, by which, particularly local residents can participate in reconstruction of the road. Construction of the road shall radically improve movement conditions, travel time on the road and increase road safety. This, in turn, shall result in improvement of social situation of population in the project area. During operation period, despite existing negative impacts of the road on the human habitat, flora and fauna, the road has well-defined value in socioeconomic development of society and livelihoods of population. With improvement of transport - operating characteristics of the road due to its rehabilitation, the quality of services to public will be significantly improved.

### **Cultural and historical sites**

153. During construction, the impact to cultural sites will be in the form of physical abuse and vibration exposure. Physical disturbance of these sites by construction workers. During construction, the impact to the following objects below.

Cemeteries:

- 68 km Cemetery on the (RHS) 2-3 m away from the road.
- 70 km Cemetery (LHS) 2-3 m away from the road.
- 83 km Cemetery (LHS) 50-70 m from the road.

154. The expansion of the road may be affecting this site of cultural heritage, but it is necessary to take mitigation measures from physical impact of machinery and equipment, as well as construction workers. It is necessary to determine the protection zone of these objects, and coordinate with MoCIT KR and local authorities and during construction to ensure their fencing. During operation period, no significant impact is expected.

### **Traffic safety**

155. During construction period, construction and road building machinery shall influence on traffic resulting in impeded movement, possible crowding of cars and machinery, violation of traffic rules and possible emergencies. To prevent such situations, we need to provide for mitigation measures to regulate traffic. During operation period, of the impact on traffic will be minimal due to arrangement of road signs and markings.

### **Construction camps**

156. During construction period, construction camps will be established outside the territory of villages. Works schedule will be controlled in these camps. There may be formed of solid domestic waste, bad housekeeping, soil contamination may take place, local flora and fauna

might be impacted on the territory and thereby cause concern of local population. The Environmental Management Plan includes measures focused on mitigation of such impact. During operation period, this issue is not considered.

## **2. Mitigation measures**

### **2.1 Pre-Construction & Design Phase**

157. The Pre-construction and Detailed Design Phases cover the period when the Design Consultant accepts the design work up to finalization of the Tender Documents and prior to the engagement of the contractor for the actual construction. The engineering designs shall include all the necessary work relevant to detailed site surveys, design computations, technical drawings, environmental and social requirements, technical specifications and tender documents. This will be followed by Tendering process from which the Client/Employer shall decide on the Contractor for the civil works.
158. Avoidance of impacts can be executed by proper planning/preparation during the Pre-engineering and design phases. Contract documents should include clauses be formed based on the IEEs and EMPs of the project and communicated with sufficient emphasis to the Contractor. A number of these impacts are discussed below and reflected appropriately in the EMP.
159. During the pre-construction and detailed engineering phase, the design engineers should be guided on a number of items need to be considered in the construction of road and bridge designs, and which will have relevance to the environmental aspects of the project. These items are as follows:
160. **Water Contamination** can occur at any places of earthwork (Annex A2) and rehabilitation of bridges (Table 8) /culverts (Annex A3).

Bridges and culverts shall be designed with enough capacity of water flow together with erosion prevention work. Although, there are no special protected areas or biodiversity hotspot within 500m on either side of the alignment for its entire length, the river bank and the pond can be considered as ecological relevant sites which warrant special consideration. As for muddy runoff water from embankment, installation of side drain and sediment pond shall be specified. The design engineers should take these items into consideration in finalization of the designs.
161. **Cultural and historical sites** - The objects of historical and cultural heritage are the objects of study and protection of the Ministry of Culture, Information and Tourism of the Kyrgyz Republic (MoCIT KR). To prevent exposure to these objects it is necessary to develop Management plan for cultural and historical sites, according to the law protection zone of objects is not less than 50 m. Therefore, all questions related to the establishment of protection zones, procedures, management plans should be coordinated with MoCIT KR and local government. On the basis of the findings of Archaeological Study (Appendix F), during the detailed design stage, Consultant should send the road design along with the Management plan for objects of cultural heritage for MoCIT KR approval. Conduct visual observation of the objects in cemeteries and mausoleums to document their state before the construction works jointly with MoCIT KR and local authorities.
162. **Environmental Safeguard Training** - CSC will designate his own environmental specialist for the implementation of EIAs, their EMPs and monitoring compliance with environmental clauses contained in the contract specifications. Correspondingly, the Contractor will do the same. Preferably during the early part of the construction, the CSC will provide sufficient briefing seminar on EMP implementation and compliance monitoring for the CSC's inspectors as well as the contractor. Such seminar should be conceptualized during the design phase.
163. **Health and Safety Programs** shall be established. The Contractor shall be provided with guidelines in the design or in the Technical Specifications to ensure Occupational Safety and Health Act (OSHA) in addition to traffic safety issues shall be mitigated during the construction phase of the Project. The Contractor shall be provided guidelines in the design or in the Technical Specifications to ensure that traffic safety issues shall be responded to

during the construction phase of the Project, including incorporation of: (i) Safety barriers; (ii) Traffic signs; (iii) Road crossings; (iv) Speed bumps; and (v) Speed limits.

164. **Slope Stability** - To minimize impacts of erosion, side slopes of embankments will be designed to reflect soil strength and other considerations as included in the project specifications in order to reduce slips or erosion; for embankments higher than 6m, stepped embankments will be used. Use of “green measures”, such as planting native vegetation will be a favored mitigation approach

For geology and seismic conditions, cuts on the mountain and hillsides should be stable or be reinforced; earthquake loading shall be applied to the design of structures, to ensure that seismic events do not have negative impacts during the operational phase of the Project.

165. **On Flora and Fauna** –In the preliminary assessment, the estimated number of trees to be affected is 38. A replacement ratio of 1:2 is recommended to ensure that the tree replacement rate does not fall below the number to be replaced. The CSC shall produce the plan with IPIG-MoTR. Areas for replanting shall be decided with CSC, IPIG-MOTR and the local officials. The cost for replanting can be part of the project to be implemented by the Contractor during the construction period to ensure that plant care will be provided. Since the target will be survivability of the trees, payment can be contingent to the number of trees that will survive within the contract period.

The river bank can be considered as ecologically relevant sites which warrant special consideration. The design engineers should take these items into consideration in finalization of the designs.

166. **Livestock and Pedestrian Crossings** – Since the road section traverses residential areas, farmlands and pasture grounds, the need to provide pedestrian and livestock crossing becomes important. Category II Road allows design speed of 120 km/hour in flat terrain (100kph in cross-country and 60 kph in mountainous terrain) for vehicular traffic, such that crossing people (especially children) and livestock (sheep, cattle, horses, etc.) pose real danger. The design should identify spots for safe location of these crossings in coordination with the local residents. These crossings should also be dimensioned appropriately to adequately serve the purpose, considering its intended function and safety considerations. It is important to have full utility of these road features to serve the needs of the residents and the agricultural community. The crossing zebra mark for pedestrians in the residential areas will be installed through every 200-250 m.
167. **Bus Stops Bay** – With the improvement of the road, it is anticipated that bus traffic, especially by the mini-buses (marshrutka) will increase. With the new road, for safety purposes, designated bus/transport stops will have to be decided in the detailed design. This required sufficient discussion with MoTR and the local community. On the designed section 12 bus stops are provided along the road.
168. **Powerlines** are running along and, sometimes crossing road overhead. Attention shall be paid at designing road to minimize the impact to these powerlines/pylons when they very closely located to the road.

## **2.2. Construction Phase**

169. A specific environmental section shall be included within the main Bid Documents indicating that the Contractor shall be responsible for conforming to the requirements of the EMP. As such this EMP shall be included as an annex to the Contract Bid Documents
170. Consistent with ADB’s SPS 2009, the implementation of measures prioritizes on avoidance; followed by reduction; then mitigation; and finally, if all else fails, replacement of what was impacted or compensation to the impacted parties. Under the guidance of CSC, the contractor will have to submit general Site-Specific Environmental Management Plans (SSEMP)) on the basis EMP prior to commencing operations.
171. The general SSEMP should contain the following 11 annexes:
- (i) Method Statement for Construction

- (ii) Dust Suppression Plan
- (iii) Construction Noise Suppression Plan
- (iv) Surface Water Contamination Prevention Plan
- (v) Borrow Pits Management Plan
- (vi) Soil Management Plant
- (vii) Solid and Liquid Waste Management Plan
- (viii) Cultural & historical sites Management Plan
- (ix) Safety Management Plan
- (x) Camp and Workshop Management Plan
- (xi) Material Processing Plants/Equipment and Storage Facilities Plan

172. **Method Statement of Construction** – Contractor shall submit the construction method of statement, detailing the work process, area required and duration of the process. The typical construction process will entail,

**Firstly**, the closure or restriction of existing traffic at the work sites and establishment of detour road. The provision of the new detour road will entail, stripping and clearing of vegetation, excavation, filling and leveling of the area, provision of embankment fill and necessary surfacing for the existing traffic.

**Secondly**, road widening will entail earthwork and breaking of rocks, which need to be hauled to some designated stockpiles. These works by themselves disturb the natural surroundings, and affect vegetation. It is important that measures for proper maintenance of the detour road be established to respond to traffic and community safety, control of dust, noise and emissions. Replanting of affected trees should be done as soon as possible and schemes for detour roads and soil stockpiles should favor tree preservations. Waterways should be respected and contamination should be prevented.

**Thirdly**, the bridge construction will start with the substructure such as the foundation systems and piers. This will be followed by the superstructure elements of girders, deck slab and railing. The construction of the superstructure components such as the girder and deck slab will involve installation of form works, casting of concrete and in some instances, post tensioning of tendons when necessary. The important guideline to be brought forward is the use of precast elements to minimize pouring and casting of superstructure elements over water to minimize contamination. Concrete batch plants will provide the necessary concrete for these structural elements from approved sites with operational guidelines in accordance with environmental protocols and industry standards.

**Fourthly**, demolition of existing pavement and bridges. This will involve scarifying old pavement structure, and earthworks to conform to design requirements. For the bridges, it will be breaking the structures at the existing connections and removal of deck and girder elements by use of heavy equipment. These old bridge components will be placed in designated areas, which will not impact the natural environment, impede traffic and cause safety concerns to the general public. The bridge abutments and underlying foundations will be excavated and removed to give way for replacement structures. This breaking, demolition and removal of old elements will generate considerable noise and dust and chunks of debris will drop into the existing waterway. To minimize the risk of water contamination, the demolition and construction activities will be highly advisable in the summer months.

**Fifthly**, construction of the new pavement and bridges. The pavement construction will entail embankment filling, subbase, base course and asphalt pavement layer construction. In the end the final wearing course will be laid along all throughout from the existing road, on to the approach roads, and onto the deck slab in such a manner to have smooth layer of road and bridge pavement. Embankment works will entail transport of approved fill materials from borrow pits or from cuts. The suitable materials for subbase and base course will come from quarries or borrow pits of approved properties. These pavement substructures will be engineered and compacted to desired degrees with the use of graders, and compactors in accordance with designs and specifications. The asphalt pavement layers will be provided

by asphalt plants with crushed stones and rocks for the aggregate requirements. It will be the responsibility of the Contractor that asphalt plant would produce the necessary required bituminous mix in conformance to environmental requirements for asphalt plant siting and operations.

173. **Environmental specialist of CSC** inspects of Environmental Management Activity by the Contractor and submit monitoring reports quarterly and twice a year to IPIG.
174. **Committee of Grievance Redressing** shall be functioning to resolve disputes, if any, between Locals and Contractor.
175. For the Section “Kochkor (Km 64) to Epkin (Km 89)”, the primary relevant issues consist of air and noise emissions, proper management of earthworks, waste materials and contractor good-housekeeping practices associated with fuel and lubricant management, work camp waste disposal, and occupation health and safety practices for the contractor's workforce. The following is a discussion of highlights of the details provided in the EMP.
176. **Air quality** impacts may be expected to be generated by construction activities, such as, construction machinery exhausts, emissions from asphalt plants, dry exposed soils and material stockpiles, dust from haul roads and construction activities, as well as aggregate crushers, but will be temporary and local. Sensitive receptor sites within the villages of Kok-Djar, Chekildek, and Epkin should be considered as areas of mitigation in terms of air quality, noise/vibration. It is noted that residential houses are always located at distance greater than 20m from the edge of car lane, where construction equipment is working, so that transmission of emitted gases, noise and vibration to such far away receptors become quite reduced.
177. To reduce emission levels of exhausted gases, together with noise and vibration as well, in general, the contractor must implement the following mitigating measures; (i) keep construction equipment in good condition (ii) prevent idling of engines by shutting off machineries not in use for more than 3 minutes (iii) prohibit use of machinery or equipment that cause excessive smoke emissions (iv) utilize low- emission type machineries and (v) install tentative noise (air pollution) barrier, if necessary.

To minimize dust, the contractor shall develop a Dust Suppression Plan and have it approved by the CSC. The Program will ensure:

- Unpaved haul routes leading to settlements are water-sprayed regularly to suppress dust.
  - Trucks hauling earth/materials be covered when transporting materials, especially through settlements.
  - Spraying water over hauling route, stock pile, borrow pit
  - Introduction of low pollutant emission equipment, attached with proper muffler attached and regular maintenance
  - Installation of barrier after monitoring if necessary
  - Air quality measurements at receptor sites (primarily those specified in the baseline measurements) are done as prescribed in the Environmental Monitoring Plan.
178. **Material Transport Route** – Estimates from the preliminary design for the section show that 163,170 cubic meters will be the cut volume and 78,500 cubic meters for fill volume for the road section. Truck traffic will considerably impact local roads as well as the communities they traverse. CSC in coordination with IPIG and local administrations determines the haul routes with sufficient maintenance to minimize dust, noise generation and disturbance to residents by restricting the hauling time between 07:00 and 18:00. During the field investigations by the material specialist, suitable construction materials were located and inspected. Table 9 represents the possible borrow areas for this road for Section 2A.
  179. **Noise and Vibration** - Construction activities are expected to generate significant but temporary noises from various construction tools such as jack hammers and other similar machines that could produce noise of about 89-90 dB(A) at about 10 m from the work site. Also, vibration due to large pavement breaking machines as well as a big percentage of trucks going in and out of the area is expected to be generated within 6-8 m from the

carriageway but attenuating at 10m. In these sensitive areas, the distance from the edge of car lane to the nearest residential houses/buildings are not less than 20m, by which distance, major emission (air pollution, noise and vibration) impacts from the construction equipment on road are significantly reduced.

180. Construction work must be limited to 7:00 - 18:30 in urban areas and 06:00 – 19:00 within 500 m of settlements as well as limiting hauling traffic through settlements. Good mufflers should be installed to trucks and equipment, especially when working near sensitive receptors. Also, noise generated must be limited to 70 dB(A) and must be strictly enforced within areas of sensitive receptors. Monitoring of noise during construction stage will be conducted according to the EMP.
181. According to the results of vibration monitoring, it was in the range of 90-95 dB(A) that are considered no so high compared to the required environmental standard of level 108 dB(A) (refer to d) Vibration, Annex E). Vibration can be caused by conventional construction works except blasting. Vibration may occur from the operation of heavy construction equipment during the dismantling of the road surface, as well as the trucks entering and leaving the area of work, which create additional vibration at a distance of 6-8 meters from the roadway, but it will become weak over the next 10 m. The level of vibration generated by these mechanisms and assessed as very high vibration levels 90-95 dB(A) on the theoretical basis. Vibration monitoring is required under the EMP.
182. Thus, vibration levels during construction has been assumed as less than existing (normal day level without construction work) level and, if so, no measures are supposed to be required for vibration mitigation. However conventional mitigation measures are to be taken as per KR regulation such as, use of vibration minimized equipment, limiting of working hours, good maintenance and monitoring, when construction work is implemented near the sensitive receptors.
183. **Surface water** – Several types of waterways are found to be crossed by the project road. These are either man-made such as irrigation canals and flood control ditches, as well as naturally occurring rivers. These waterways will become receptors of potential negative environmental impacts such as pollution from construction area runoff, and change in surface hydrology due to increased sediment load. Total number of culverts will be 35, and 4 bridges. In order to mitigate negative impacts on the waterways, the following must be implemented: (i) store stockpiles of topsoil and other such materials at a safe distance from surface waters; (ii) long term stockpiles must be covered with grass or other suitable coverings; (iii) create settlement ponds where construction activities are near natural waterways.
184. Unsustainable construction practices such as improper handling and storage of construction materials (e.g., concrete, asphalt, lubricants, fuels, and solvents etc.) can pose risk of contaminating the waterways crossed by the project road. Embankments and construction materials like fill, sand and gravel can be washed out by rainwater into watercourses during downpours. Oil and grease from leaks in engines can also accumulate in surface waters and should be properly controlled. To prevent these, appropriate mitigation measures must be taken such as (i) regular maintenance of all construction equipment, (ii) chemicals and oil must be properly stored into impermeable and bounded areas away from surface waters (not less than 75 m).
185. Within the section, the spot are Zhon-Aryk River and streams crossing the road. The Contractor should be extra careful in this spot as construction activities can directly contaminate the surface water and consequently affect the biological species in this area. Contamination should be avoided and disturbance to biota be minimized. Water quality measurements should be done during actual periods of construction at these sites.
186. During the construction of bridges construction site dimensions shall be the minimum necessary. Construction site should be placed at levels that exclude them flooding. The discharge of polluted water, landfills, parking cars and the construction of temporary facilities within the water protection zones on the river banks. Construction sites should provide capacity for the collection of sewage and garbage.

In the water protection zones (not less than 75 m) of rivers it prohibits contamination of the earth surface, including the garbage dump, waste generation, as well as parking, cleaning and repair of motor vehicles and road construction machinery, fueling.

It is prohibited extraction of local building materials in the water protection zones without permits of environmental authorities.

187. The project documentation should include the restoration work after the bridge construction: the removal of the bed of the river banks, backfilled during the construction of supporting structures; cleaning of the river bed and the flood plain from cluttering of the objects, extracting and hauling piles of scaffolding and temporary supports; dismantling of temporary facilities on the construction site and land reclamation, including borrow area and access roads.
188. The environmental impacts associated with this work can be minimized if culverts are rebuilt properly, i.e., properly sized and with the correct slope and downstream erosion/scour protection measures applied. If possible culvert work should take place during the dry season, since otherwise temporary bypasses will be necessary. However, a number of culverts convey irrigation water, which flows, based on a prescribed irrigation schedule. Contractors will need to liaise closely with farmers to establish times when work can take place and not harm crop development. Nearly all structures will be concrete box culverts, precast, with each section set in place and sealed with a special commercially available gasket/sealant material.
189. **Borrow Areas** – When planning to open a new borrow site, the contractor, within the purview of this IEE, should have the extraction permit, approval of a development plan, and later on approval of borrow pit restoration plan. The Contractor shall obtain all required permits for use of borrow pits and disposal areas from local authorities, get approval from regional departments of SAEPF under the Government of KR, prepare a “Borrow Pits Development and Restoration Plan” and submit all necessary documents to MoTR of KR to obtain a license to extract aggregate materials from the State Agency for Geology and Mineral Resources. These requirements do not apply to existing borrow areas or aggregated facilities. When using private borrow pit, all permits (licenses, approvals from local authorities, regional departments of SAEPF under the Government of KR, etc.) are responsibility of the owner of borrow pit which should be indicated in the agreements signed between the contractor and the borrow pit owner. The contractor will need to prepare a site development plan which must provide the following information:
  - Capacity and operation hours of a borrow pit;
  - Development and extraction sequence of borrow pit;
  - Technique and mechanisms for stripping and excavation operations;
  - Operation and time schedule for borrow pit development;
  - Extraction method and transport plan, including route(s);
  - Safety rules and hours of operation;
  - Expected quality of extracted materials;
  - Topsoil storage/protection and environment protection steps; and,
  - Rehabilitation of disturbed lands when site is decommissioned.
  - Calculation of mobile sources’ emission charge.
190. **Soil Management Plan** - Excavation or cuts of soil materials along will require temporary or permanent areas for deposition. This should be done with proper arrangement with the landowner on which the excess soil will have to be deposited. Permanent spoil soil deposit areas should be coordinated with local officials and proper permit obtained accordingly. Soil Management Plan detailing measures to be undertaken to minimize effects of wind and water erosion on stockpiles, measures to minimize loss of fertility of topsoil, timeframes, haul routes and disposal site.
191. **Solid and Liquid Management Plan** - For treatment of solid construction waste such as hacked concrete debris and liquid waste such as excavated mud, the Contractor shall establish solid and liquid wastes management plan covering provision of garbage bins, regular collection and disposal in a hygienic manner, as well as proposed disposal sites for

various types of wastes (e.g., domestic waste, used tires, etc.) consistent with appropriate local and national regulations.

192. **Impacts on Cultural and Historical Sites** – During construction the contractor must apply in writing to the local authorities in defining the protection zones around these sites. Also, Contractor should employ techniques during construction works (vibration) with minimal or no impact to any cultural, historical or archeological structures along the road. Physical cordon around identified sites should be installed to minimize construction impact and alert workers/people from disturbing archaeological sites, especially near the following:

Cemeteries:

- 68 km Cemetery on the (RHS) 2-3 m away from the road
- 70 km Cemetery (LHS) 2-3 m away from the road.
- 83 km Cemetery (LHS) 50-70 m from the road

The cemeteries are located in 2-3 meters from the road right of way. According to the design of the road, widening of the road section will have no impact on these objects, on the issue of resettlement or land acquisition. The expansion of the road is planned within the existing right of way and will be held on the opposite site from cemetery.



**Figure 11: Cemetery, RHS**



**Figure 12: Cemetery, LHS**

**Measures to mitigate the impact on the cultural monuments (cemetery):**

- During the work, it is necessary to inform the local authorities on the construction works around these sites.
- It is necessary that local authorities carried out the control and monitoring of these areas, during the construction works.
- To protect these cultural sites, it is necessary to arrange physical barriers (fencing).
- During the construction works, it is necessary to assign an expert on traffic management, to prevent causing of physical damage by the machines and mechanisms to the cultural objects.
- It is necessary to conduct outreach to workers on the strict prohibition of physical destruction, desecration and pollution data objects.



- It is necessary to post warning signs and information signs for the workers.
  - Limiting the operation of machines and mechanisms, which create high levels of noise and vibration.
  - Dust suppression works.
  - All road equipment must be used within the territory allotted for construction site.
193. The Contractor should strictly instruct its workers on disturbance of these sites. In accordance with the Law of the Kyrgyz Republic on historical cultural heritage, in the event of cultural monuments found, all construction works must be stopped and report the findings to the local executive authorities or any other competent organization (Institute of History and Cultural Heritage, National Academy of Sciences; Department of History, Kyrgyz National University after Balasagyn) and MoCIT KR.
194. **Traffic Safety** for Workers and Local People, especially around the sensitive receptors - The Contractor shall install necessary safety measures specified in the design or in the Technical Specifications to ensure that community and traffic safety issues shall be responded to during the construction phase of the Project, including incorporation of: (i) Safety barriers; (ii) Traffic signs; (iii) Road crossings; (iv) Speed bumps; and (v) Speed limits. Social impacts along the vicinity of the road during construction, such as impairment of the usual access, community health and safety concerns, plus socio-economic conflicts. If any traffic re-routing needs to be done, sufficient advisory and notification should be provided to the people and motorists. Dust and noise nuisances should be minimized during construction. Protective barriers and fencing should be provided to prevent people and animals from loitering at the project site for safety purposes. During the construction phase, it may be inevitable that existing traffic will be disrupted and local accessibility will be impaired, which can cause problems with the local community. To mitigate this situation the Contractor should: (1) Submit a traffic management plan to local traffic authorities prior to mobilization; (2) Provide information to the public about the scope and schedule of construction activities and expected disruptions and access restrictions; (3) Allow for adequate traffic flow around construction areas; (4) Provide adequate signalization, appropriate lighting, well-designed traffic safety signs, barriers and flag persons for traffic control; and (5) Provide temporary access where accessibility is temporarily restricted due to civil works.
195. **Occupational Health and Safety.** For health and safety protection of workers and adjacent communities, the following shall be provided: (i) Adequate health care facilities (including first aid facilities) within construction sites; (ii) Training of all construction workers in basic sanitation and health care issues, general health and safety matters, and on the specific hazards of their work; (iii) Personal protection equipment for workers, such as safety boots, helmets, gloves, protective clothing, goggles, and ear protection in accordance with KR legislation; (iv) Clean drinking water to all workers; (v) Adequate protection to the general public, including safety barriers and marking of hazardous areas; (vi) Safe access across the construction site to people whose settlements and access are temporarily severed by road construction; (vii) Adequate drainage throughout the camps so that stagnant water bodies and puddles do not form; (viii) Sanitary latrines and garbage bins in construction site, which will be cleared when reaching capacity by the contractors to prevent outbreak of diseases.
196. **Maintenance of Access during Construction –** Construction of bridges and culverts over water necessitates detour roads to be temporarily arranged. In so doing, normal traffic will be impaired and cause access issues to motorists. These detour roads need to be maintained for connectivity and safety purposes. Traffic plan incorporating these detour roads should be formulated by the contractor. During the design stage, the designers should also anticipate the need for detour and to include this issue as part of the work requirements. Adequate local assessment and consultation should be done to avoid this social issue during the actual construction.
197. **Asphalt, Concrete and Crushing Plant Pollution -** During the selection of a site for bitumen plant, concrete plant, stone crusher equipment, which emit pollutants, noise and transmits vibrations, the contractor will need to comply with SanPiN 2.2.1/2.1.1 and SanPiN 2.2.1/2.1.1.006-03, and establish a specific buffer zone around any such facility. In the KR, this is referred to as a sanitary-hygienic zone, and is a mandatory element of any facility that

affects habitats and human health. The sanitary-protection zone (SPZ) separates the area of an industrial site from residential areas, landscape and recreation areas, parks, and health resorts with mandatory demarcation of boundaries by using specialized information signs. The boundaries are as follows:

- Class II – SPZ 500m.
  - ✓ Production of asphalt-concrete at fixed plants.
  - ✓ Production of asphalt-concrete at mobile plants.
- Class III – SPZ 300m.
  - ✓ Production of crushed stone, gravel and sand, milling of quartz sand.
- Class III – SPZ 300m.
  - ✓ Borrow pits of gravel, sand, and clay.
  - ✓ Bitumen plants
- Class IV – SPZ 100m.
  - ✓ Concrete solution plants.

198. **Camp and Workshop Management** - Garbage and sewage and solid and liquid waste from equipment maintenance can be serious pollutants and disease vectors. The contractor will therefore need to practice good worksite and construction camp management. Inspections by the CSC environmental specialist will take place monthly and any compliance issues such as strewn garbage, open waste pits, oil soaked ground and unsanitary washing facilities for workers, the contractor will be subject to an immediate fine and a stop-work order will be issued if clean up is not underway within 12 hours of detection. If the contractor does not act, the CSC will retain an outside firm to clean up the area and this amount will be deducted from the contract total.

199. Where feasible the contractor will arrange the temporary integration of waste collection from work sites into existing waste collection systems and disposal facilities of nearby communities. This shall be taken into consideration when deciding the place for the camp. The contractor will arrange for extra payment if community services are to be used.

200. The contractor shall hire a qualified health and safety expert who will provide safety training to the staff according to the requirements of the individual work place. Prior to the commencement of works, the work site personnel shall be instructed about safety rules for the handling and storage of hazardous substances (fuel, oil, lubricants, bitumen, paint etc.) and the cleaning of the equipment. In preparation of this the contractor shall establish a short list of materials to be used (by quality and quantity) and provide a rough concept explaining the training / briefing that shall be provided for the construction personnel. The contractor shall provide information to workers, encouraging changes in individual's personal behavior and encouraging the use of preventive measures. The goal of the information is to reduce the risk of HIV / STD transmission among construction workers, camp support staff and local communities.

201. **Powerline/Pylons** – They shall be relocated backward as per predetermined by SSEMP.

202. **Fauna and Flora** – Contrator shall follow:

A maximum compaction of the soil on a tree stern, for more than 30cm, can damage the tree. Fill up material in the tree stem area has to be organic soil.

In this case cutting can't be prevented and a new tree is to be planted as a compensation measure at the respective location within the existing road.

Species to be planted are walnuts, maple ash tree, elm tree, white poplars, white willow, white acacia. Plantings shall be conducted after technical works have been completed. Planting time shall be restricted to spring (March till April) and/or autumn (September till October). Qualit

Installation of a temporary vegetation protection fence during construction activities is required.

203. **Disturbance of agricultural lands** can occur when trucks and equipment roll over them during construction activities. During construction, it can occur that equipment and trucks

have to maneuver over agricultural lands and in so doing introduce compaction to these areas and render the soil unfit for agriculture. The Contractor should prevent these unnecessary disturbances on agricultural lands.

204. **Existing infrastructures** - Construction activities in close vicinity to existing infrastructure such as water supply pipes and other facilities, waste water discharge facilities, electricity lines, etc. may give damages to them, or directly destroy existing pavement, bridge, power line system
205. **Unmanaged Utilization of Waste Asphalt-Concrete Temporary Storage and Processing Areas** – Old asphalt pavement will be removed and be replaced in the new pavement. Storage or stockpile areas of old asphalt should be situated where they pose no risk of contamination to the environment. In coordination with local authorities, location of old asphalt stockpile areas will be identified, with a minimal distance of 500m from any settlement. Preferably, storage areas should be in state-owned land. If private lands will be used, a negotiated rent on the property should be established with the land owner. All temporary asphalt pavement storage and processing areas shall be agreed upon with the regional departments of SAEPF of KR under the Government of KR. Old asphalt should be trucked away in blocks and stockpiles should be no higher than 2.5 m.

There are two ways of using old asphalt:

- The transfer of old asphalt to Local RMU of MoTR for upfilling of secondary roads;
- Use the old asphalt to strengthen the top coating of the road shoulders by adding the gravel-sand mixture with 15cm thickness.

### 2.3. Operations and Maintenance Phase

206. After the Handing-Over to the Client, a one-year defects liability period ensues, in which the Contractor will still be responsible in remedying any deficiency or flaws in the overall works. After the defect liability period, the Operation and Maintenance Phase follows, in which the Client takes over with full responsibility for the operations and maintenance of the road. Impacts on the environment shall be on the usage of the road by vehicular traffic and subsequent maintenance activities to retain the service level of the infrastructure.
207. The projected service life of the road is 20 years and over this operations period, the impacts related to traffic on the environment are rather viewed as cumulative on account of the functions of the road components and can be in conjunction with other activities. These time-wise impacts can also be long-term as they may manifest after construction and continue to persist for the entire usage and operation of the road. The perceived impacts and corresponding mitigation measures during the operation of the road will be on:
208. **Air Quality** - After computations, the maximum traffic can be around 6,231 vehicles per day in 2030, with this growth, will come the elimination of older more polluting vehicles from the fleet, fewer stops and starts due to better road conditions and traffic management, better engine technology and vastly more fuel efficient vehicles. Further, KR will receive better refined fuels with lower emission factors per liter used. The air quality in the project corridor was predicted in Table 16 in which no air pollution is estimated by increased vehicles.
209. A high graded road, properly signed, with good lane markings and careful intersection management, will allow the traffic to move more smoothly thus reducing the high emission due to frequent acceleration and deceleration.
210. **Noise and Vibration** – Noise level predicted in 2030 at the location 20m away from the car lane with increased number of vehicles and designed driving speed of 120km/h is much beyond the IFC Guideline Level. Theatrically to mitigate this, driving speed shall be suppressed to be 60km/h or less or installation of noise barrier. However actual mitigation measures shall be taken, only after noise monitoring based on the actual traffic flow were taken and consultation with receptors (local residents) was implemented. Plantation of road side trees is also effective to not only noise reduction but also air pollution mitigation, providing shadow for the pedestrian. Vibration is estimated as accepted level in 2030.
211. **Soils and erosion control** - If the contractor properly implements the measures defined in the EMP for the construction period and CSC's environmental specialist completes a post-

construction safeguards audit of to confirm all mitigative measures were implemented and remain operational, erosion issues associated with the road should be negligible. Confirming that topsoil and planting were put in place as the work was being completed (not after the construction is completed) the tree planting was done and trees are healthy and being maintained will be essential. On the engineering site inspection of the culverts will be critical since their placement at too steep slope will result in serious and chronic downstream (exit) scouring. To avoid this, design slope should be at the same grade as the natural waterbody and concrete pads or preferably energy dissipation installation such as large rocks and rock gabions, installed.

212. Further, culverts need to be inspected to ensure that all debris and construction materials have been removed and any stream diversion structures have been completely removed. For that, CSC and IPIG will prepare a culvert inventory that will provide a photo of each culvert and its condition during each inspection, which should be annually and submitted to MoTR of KR. Two photos will be required, one at the upstream and a second at downstream end of each culvert.
213. MoTR will assign this work will be assigned to the contractor during the one-year warranty period, after road becomes fully operational; and after that period, taken over by MoTR's maintenance unit.
214. **Ecological Environment** - The only ecological issue that could arise during the operating period is a failure to properly maintain the large tree plantations, and also the noise attenuation berms (if these are to be built) landscaping. The local ecosystem will be significantly altered by the cutting of the trees and therefore the replanting and tree maintenance program, until the trees are at least 9-10 years old will be critical to reestablishing the pre-cutting conditions of roadside shade during the summer and windbreaks during the winter. Estimated number of trees for cut is 38; the planned number of trees for planting is 76. It is also important to note that, during the construction, tree planting should take place in the autumn and spring at a distance of not less than 1 m from the outer edge of the ditch or drainage of the projected road. Planting should be done as soon as will be completed earthworks on sections of roads. It is necessary to monitor and control of the planted trees, both during construction and during operation.
215. **Livestock and Pedestrian Crossings** - Since the road section traverses residential areas, farmlands and pasture grounds, the need to provide pedestrian and livestock crossing becomes important. Category II Road allows design speed of 120 km/hour in rolling terrain (60 km/hour in mountainous terrain) for vehicular traffic, such that crossing people (especially children) and livestock (sheep, cattle, horses, etc.) pose real danger. Also on the road need to install the road signs indicating the places of transition of people and livestock. The crossing of people in the residential areas will be installed through every 200-250 m. Road safety features such as, streetlights, traffic lights pedestrian crossings, livestock crossings and other visual means to reduce accidents will be installed along the road.

### **3. Climate Change Impacts on the Project Road**

216. In this PPTA a Climate Change Study of the Project Road was included as a separate sector. This study focused on the following impacts to the project road:
  - River floods and water logging in spring, due to more intense rainfall. This will mainly affect lower altitudes and areas susceptible to flooding;
  - Heat stress in the summer, especially at lower altitudes;
  - Mudslides related to more intense rainfall in the spring at medium altitudes (and in a lesser degree also high altitudes);
  - Flush floods in the summer especially at higher altitudes, related to higher temperatures together with the increase in winter, spring and autumn rainfall (snow at higher altitudes).
217. The study made reference to the climate simulations done by the International Fund for Agricultural Development (IFAD) for Kyrgyzstan in which it indicated that the "Section "Kochkor (km 64) to Epkin (Km 89)" located at an area with low or very low vulnerability risk as compared with the north of Chuy Oblast and other high altitude areas. Moreover, as per IFAD the vulnerabilities identified are mainly related to increased heat stress at the project

areas with low altitudes and mudslides at medium altitudes. Very limited information on the occurrence of extreme rainfall was found, but with relation to emergency situations, there is a tendency of reduction of rainstorms.

218. The hazards related to flooding have been studied using UNEP's Global Risk Data Platform which entails hazards modeling was developed by the World Meteorological Organization (WMO) and the United Nations Education and Scientific Cultural Organization (UNESCO). As per data in the Platform, the flood hazard will increase along major rivers in the Central Asia region, but Kyrgyzstan and the project area is less influenced by this than the neighboring countries. The project area is located in areas of low risk, whereas the risk increases at higher altitudes.
219. The values of seasonal temperature changes by year 2100 anticipate a greater increase of summer temperature in comparison to other seasons, and the minimum increase is predicted for the winter period. On the positive side, warmer winters due to climate change can alleviate the clearing snow; which would mean less maintenance cost during the winter months.

## F. Analysis of Alternatives

220. Two alternatives were considered in this section:

1. Zero option – the «Inaction»/ do nothing alternative
2. The road reconstruction project

### 1. Zero option – the «Inaction»/ do nothing alternative

221. Within the framework of ADB's SPS 2009, an important consideration the alternative "Zero option" is being devoted on. The alternative "Zero option" presents case scenario in which the project is not to be done at all. By comparative evaluation, it can be inferred whether the project is necessary at all or provide some insights on how to properly proceed should the project be fully implemented.
222. **Atmospheric air.** The existing road surface does not meet the requirements of III road category. In some places, there is no "cold asphalt" road pavement. Due to unevenness of the road, vehicle engines run unevenly by releasing large amount of exhaust gases. Dust formation is most likely to happen on places where there is gravel surface, which also affects atmosphere.
223. **Noise and vibration.** Noise and vibration are a major factor of concern people day and night. Lack of coverage of the road, spreading the sound waves at great distances from the road creating a high noise and vibration impact on the population at night and in the daytime. The most sensitive recipients are residents of nearby houses to the road, kindergarten, hospital, private facilities and cultural sites.
224. **Surface water.** In places, where the road crosses channels and bridges, we can observe destruction of given structures and erosion of banks. In case of accidental destruction of some culverts and erosion of banks, we may observe pollution of water body. Runoff from the road surface flows to channel and river by causing water bodies' pollution with oil products and oils. This impact will be expressed in possible soil contamination with oil products, oils and waste. This Section has a river Zhon-Aryk.
225. **Soil.** Impact on soil is expressed in soil disturbance due to destruction of roadbed and going of vehicles beyond the right of way on nearby areas. Erosion due to concentration of water flows by artificial structures, ditches and channels. Soil and water might be contaminated by oils, gasoline of vehicles.
226. **Rehabilitation of Culverts** – Continued to be as present poor condition. However, no debris is generated.
227. **Powerlines/Pylons** - No powerline/pylons are affected.
228. **Groundwater** – are exposed to risk of contamination by the spill-oil of broken cars by traffic accident which risk may be reduced after project.
229. **Flora and fauna.** Impact on flora and fauna will be negligible, as the road is existing road and has already caused anthropogenic impact.
230. **LARP and social issues.** Economic relocation and resettlement is not applicable. Social aspect is expressed in violation of communication routes of local residents, increase in time spent on the road to places of work and leisure. Poor traffic conditions for agricultural machinery, animal-drawn transport, cyclists and cattle driving. High accident risk might be created on the road and intersections with other roads. Moving vehicle causes vibration of buildings and structures. Dust pollution and gas contamination.
231. **Safety.** The road is not equipped with traffic indicators, signs, markings, which create prerequisites for accidents among population and vehicles crash. Violation of speed limits results in collisions and runs over people, animals and vehicles. There is no established road crossing places for people and cattle
232. **If zero option is implemented**, the benefit will be less traffic density and few road accidents.

The negative side is increased noise and vibration, lack of proper road pavement, negative social aspect, and impossibility to develop the region's economy

## **2. Alternative – the road reconstruction project**

233. This Alternative is considering the reconstruction existing road of the section Kochkor (km 64) to Epkin (Km 89).

The Road section will be reconstructed and the total distance will be 25 km. Main specifications of the projected road are given in Section C the Project description. During the pre-construction stage, reconstruction of the road will not have any environmental and social impacts. This period, the work will be associated with the design and proper planning of works, as well as informing the public and other stakeholders about the proposed work.

234. During the construction period, air quality will be affected by vehicles, operation of road equipment and machinery, excavation works, soil, sandy gravel, crushed stone and operation of asphalt mixing plant. The impact will be provided by pollutant emissions from the operation of machinery and mechanisms and formation of dust. The impact will be exerted on the water bodies (irrigation channels, Zhon-Aryk River) from operation of the machinery, construction camps, and possible contamination of water by oil and oil products, soil, residues of construction and household waste products. The impact on soil and land resources expressed by extraction of soil, ground, temporary diversion of land, and contamination by oil products, construction and household waste, as well as disturbance of topsoil by its misuse and stockpiling. The impact on the historical and cultural heritage will be expressed in the physical impact (vibration and possible disturbance of construction workers) to the cemeteries and burial grounds located in the vicinity of the road.

235. During the operation, the main impact will be on air, physical factors as noise and vibration, especially in the settlements. More detailed analysis of the alternatives of the environmental and social impacts is given in Section E. Environmental Impacts and Mitigation Measures.

Given that the reconstruction of the road will be carried out on the existing road and the environment has already formed anthropogenic ecosystem, it can be concluded that the impact of the projected road on the environment will be insignificant, but in social terms the impact will be positive.

## **G. Information Disclosure, Consultation, and Participation**

236. Formal and informal public consultations were done for the project during the study period. During the site visits some informal discussions were done with the villagers and some village heads as field information were being gathered. The IPIG organized a formal public consultation and it was arranged with the district heads to invite people of affected villages to present and discuss with them environmental and social issues relevant to the rehabilitation of the road.

### **1. Public Consultations and Participation**

237. For Section “Kochkor (Km 64) to Epkin (Km 89)”, in accordance with ADB’s Public Communications Policy (2011) and SPS (2009), Public Consultation meeting on the environmental aspects was undertaken on 17 March 2016 in Kochkor District Office (see Photo below). This was organized by the IPIG-MoTR through official communication to the local leaders inviting stakeholders in the surrounding villages. The sheets of the recorder and the attendance are presented in Annex B, C.
238. During the public consultation, the Consultant (Kocks Consult, GmbH), prepared PowerPoint presentation regarding the technical features of the project and explained the potential environmental and social impacts with corresponding mitigation measures. This event was organized by IPIG-MoTR representatives with PPTA Consultants assistance. The representatives of the MoTR-IPIG answered questions and clarify any issues that were raised. In addition, the participants also were provided a sheet of paper on which the can write their questions and comments. Printed hand-outs of the presentation were prepared and distributed to the people for their information and as a way of disseminating the environmental concerns of the project to the public. Below is a photo of the public consultation.



**Figure 13: Public Consultation in Kochkor (17 March 2016)**

239. The questions raised verbally during the forum were responded right away. As mentioned above, the people who attended were provided with a sheet of paper on which to write their questions and comments on the project. The recorded questions and corresponding responses by the IPIG-MoTR were captured in a video with the transcript shown in Annex C. The verbal and written comments and questions that were raised were compiled and presented as follows and in Table 17.



240. Comments/Recommendations:

Traffic Safety:

- Possibility of bypassing the villages/schools
- Need to provide roundabout crossings
- Underpass near Epkin village school
- Road signs

Additional Infrastructure:

- Need for irrigation ditch crossing the roads
- For Contractor transfer old removed structures/pipes to the village authority
- Need for water supply pipes
- Improvement of bridges
- Underpass connection between markets
- Need for street lighting and sidewalks along the road
- Coat secondary roads with asphalt out of the old coating removed from the highway
- Arrangement of sidewalks in Chekildek, Epkin and Ak-Chiy villages and build bus stops.
- Need to connect market to road

Environmental Concern:

- Protection of cemetery structures

Relocation and Compensation:

- To check property boundaries

**Table 17: Summary Table on Public Consultation for Kochkor – Epkin**

| Questions  | Answers   |
|--|---|
| School in our village is located on the other side of the road. Almost 90% of residents are living on the opposite side. Children are passing the road. It would be good if you will construct the underground pass. | Firstly, you have to decide which one is appropriate for you: road signal or under pass. Then you need to make a request to MOTR. Your requests should be stated in written format, verbal requests will not be considered.   |
| Where you are considering the footways, along the road?  | Design is included the footways in residential areas.   |
| What are the road construction standards for swamp areas?  | In accordance with the National legislation for road construction.  |
| Please tell us the time for construction, since people need time for treating the tillage areas.   | Construction is planned to be started on 2017. Period for construction is 2 years and 1 year for technical guarantee. We will inform you beforehand.<br>Contractor will not trample your land plots.  |
| How water pipes will be used?  | Pipes will be handed over to RMD 24.<br>Please indicate in written format, in which sections irrigation pipes should be installed. Considered in IEE.   |
| We would like to know about hiring locals?   | Contractor will hire locals as per the personal labor agreement. Percentage in the agreement to be as follows: near 70% of locals will be hired for performing the earthworks, depending on the difficulty of the road section and 30% will be internationally hired specialists.   |
| How the cost for the dismantling structures will be determined?  | The team of specialists will study in detail the structures for demolition, measure them, determine the cost through an independent evaluation, submit an opinion to the State Construction Department for an expert examination, which will be further submitted to the Government by our management (MOTR). The government will ratify / approve it, after the money will be allocated.                   |
| How will the deforested trees and damaged green spaces be restored?  | If the vegetation on the edge of the road is damaged, it will be restored in a year. If this does not happen, the Contractor must plant grant seeds to restore the natural appearance of any place. No matter how many trees are cut down, they will be replaced by new seedlings; The number is much larger than the felled trees. The contractor will plant the seedlings during the road reconstruction, |

|  |   |
|--|---|
|  | and will water them. At the end of the Project, the trees will already get accustomed. Under no circumstances will the Contractor plant trees after the completion of the Project and flee without caring for them. |
|--|---|

**Attendants from Central Government/Authority:**

*Asylbek Abdygulov – Safeguards Specialist, IPIG, Motr*

*Ruslan Satybaldiev – Regional Project Coordinator*

*Sam Sapuey - International Safeguard Specialist, Kocks Consult*

*Lola Shatirishvili, Resettlement Specialist.*

*Local Residents, total 21 persons, including:*

*Beishenaliev K.M. –Head of RMD-955,*

*Saburjanov J.S.- Head of Kok-Jar Ayil Okmotu,*

*Dairov E. – Head of Architect of the Project – architecture,*

*Abdukasymov M – Chief Architect,*

*Israilov R. – Head of RUAF,*

*Sydygaliev S – Land Specialist of Semiz-Bel Ayil Okmotu,*

*Bukarov K.B. – Head of Cholpon Ayil Okmotu.*

**Full list of Local Authority/Villagers is shown in Appendix B**

241. Generally, the comments were minor with the following recommendations – possibility of bypass route, provision of roundabout crossings, irrigation ditches, water supply pipes, improvement of bridges, underpass connection between markets, street lighting, protection of cemetery structures, and confirmation of property boundaries with road corridor. The questions on the other hand were on construction standards on swampy areas, provision of sidewalks, timing of construction, and usage of recovered pipe culverts.
242. Several of the comments were already incorporated in this IEE/EMP such as concerns on damage to infrastructure and reconstruction of utilities. On the impact to infrastructure, provisions in the EMP were included to undertake good planning to enable infrastructure service not to be disrupted.
243. In order to inform a larger number of population of the villages along the road on the environmental and social issues of the project, IPIG/MoTR KR sent information letters with the results of the conclusions of IEEs to Rayon authorities, heads of village municipalities, and village elders for greater public awareness on possible types of environmental and social impacts during implementation of the road reconstruction project. This information letter is attached in Annex G.
244. In order to more effectively engage local population in the process of informing on social and environmental impacts of the project, additional public consultation will be required. It is necessary to hold a public consultation at the stage of detailed design for a representative stakeholder interaction. Also for more effective engagement with stakeholders, it is necessary to conduct public consultations in every village along the 25 km road.
245. The organization of public consultation is necessary to register participants, by indicating name, position, address and telephone number. Provide information for feedback to direct suggestions and comments.

## **2. Information Disclosure**

246. ADB endorses the IEE it is made available as information to the public, both in English and in Russian languages.
247. The procedure for public hearings in Kyrgyz Republic includes the following steps:
  - 1) Public notification on public discussions;
  - 2) Providing public access to the EIA documentation from the project initiator and / or in other accessible locations (local authorities, the territorial bodies of environmental protection), as well as disclosure of the EIA report on the website of the proponent (if website exists);
  - 3) The general public familiarizes with the EIA documentation;
  - 4) In case of public interest:
    - Public notice on the date and place of the meeting to discuss the EIA documentation;

- Collection and analysis of comments and suggestions, summarizing the results of  
Should additional information be required at any time about the project, the public may visit the IPIG-MoTR or interact with the future construction supervision consultant who will be selected for the project. On-site consultations will be held for clarifications and provision of necessary information to the public and the stakeholders on as need basis.

## H. Grievance Redress Mechanism

### 1. Objectives

248. The Grievance Redress Mechanism (GRM) is a process through which the affected people need a trusted way to voice and resolve concerns about the project and the project also finds an effective way to address affected people's concerns. In this project, the grievance mechanism will be in place by which the affected people will be fully informed of their rights and procedures for addressing complaints whether verbally or in writing during consultation, survey, time of compensation and implementation of the project. Care will always be taken to prevent grievances rather than going through long redress process.
249. The GRM will cover issues related to social, environmental and other safeguard issues under ADB safeguard covenants and Kyrgyz Law.

### 2. Grievance Redress Group (RG)

250. The GRG will be established for the duration of project implementation. The GRG is tasked with all activities needed to discuss a grievance, assess its validity, assess the scope of eventual impacts, decide eventual compensation needed and instruct/facilitate the functioning of the Grievance redress mechanism.

#### 2.1 Functioning of the GRG within the Grievance Redress Mechanism

251. The Grievance redress mechanism (GRM) involves the following 2 stages appeals:

##### Stage 1, Local (Village) Level

The grievances will first be lodged at the level of the complainant's village community. The complainant will report his case to the Local Point of Contact (LPC). The LPC will trigger the action of the Grievance Redress Group (GRG) which will assess the situation and seek a solution through consultation with complainants, local Roads Maintenance Unit (RMU) the oblast Ombudsman, and the selected AP representative.

##### Stage 2, Central Level

In case within additional 15 days the grievance is still not resolved at local level the complainant will further raise the issue to MoTR's headquarters in Bishkek again with the support of the LPC, AP representatives, and the oblast Ombudsman. The GRG will decide on the eligibility and on the complaint case and prepare the resolution, subject to IPIG/MoTR consent.

252. GRM proceedings will entail one or more meetings for each complain and may require field investigations by specific technical or valuation experts. Grievance cases shared by more than one complainant may be held together as a single case.
253. For deliberations at the local level, the meetings will be held in the village of the complainant. For appeals at central level, the meetings will be carried out at in MoTR office in Bishkek with field trips of GRG members to the village of the complainant.

#### 2.2 Composition of GRG

254. GRG will be established by the order of MoTR. The GRG is composed at different levels of appeal by the following individuals/officers.

##### Local level GRG

255. Local level GRG will be established at each Ayil-Okmotu along the project roads with the provision of members of the composition in Table 18:

**Table 18: Local Level GRG**

| GRG Member              | Position held |
|-------------------------|---------------|
| Head of Ayil-Okmotu     | Chairman      |
| Representative of RMU   | Member        |
| Female and Male APs     | Members (2)   |
| Local Point of Contact  | Member        |
| Ombudsman of the Oblast | Observer      |

|            |                |
|------------|----------------|
| Consultant | Invited Expert |
|------------|----------------|

### **Central level GRG**

256. The central level GRG will be represented by 5-7 members of the composition in Table 19.

**Table 19: Central Level GRG**

| <b>GRG Member</b>                      | <b>Position held</b>                |
|--|-------------------------------------|
| Head of IPIG of MoTR                   | Chairman                            |
| Project Coordinator at IPIG            | Member                              |
| IPIG safeguards unit representative    | Member                              |
| Representative of the RMU              | Member                              |
| Local Point of Contact                 | Liaison between Local & Central GRG |
| Ombudsman of the Oblast                | Observer                            |
| Representatives of APs (Male & Female) | Additional Observers                |

257. At each level of appeal, the GRG will be assisted as needed by the professional capacity needed to solve each specific case. This will include among others:

- Representatives of State Rayon Administration
- Representatives of the Rayon Branch of the State Agency for Architecture and Construction
- State Registration Services of the Rayon
- Ministry of Agricultural
- State Agency for Environment and Forestry
- Ministry of State Property
- Ministry of Emergency
- Technical expertise from professional engineers, and Consultants with relevant experience in environmental safeguards.

## **2.3 Duties of GRG Members**

### **Local Point of Contact**

258. Once AP files a complaint, the LPC is to undertake and complete the following tasks:

- screen the complaint for eligibility and, if found eligible register it the Complaints Log;
- draft a complaint memo to be signed by the complainant, indicating the name of complainant, date and place the case of complaint occurred, apply the date and place of complaint submission, and attach supporting documents, as necessary;
- send the complaint memo to all members of GRG, agree the date of GRG meeting;
- request the rural administration authorities to organize the meeting;
- facilitate the GRG meeting by providing a storyline for the complaint and provide factual details and relevant documents obtained;
- communicate request and queries of the complaints to the members of GRG (on central level to GRG/IPIG/ADB);
- maintain the records of the meetings and communications between GRG and complainants
- ensure administrative and organizational support to GRG members;
- raise awareness of project stakeholders, including CBOs, NGOs AHs and local authorities on the GRM, it functions and objectives.
- Liaise between local and central GRGs to convey the information of the case of complaint that was not resolved on local level and became the case to be reviewed on a Central Level.

### **Chairman of GRG / Head of Ayil-Okmotu**

259. Once the GRG Chairman is informed about the meeting date and schedule he/she is responsible to:

- a. review the complaint(s) and supporting materials if any ahead of the GRG meeting;
- b. manage to obtain any additional information prior to GRG meeting date;
- c. involve relevant task expert if such need is obvious after review of the complaint(s);
- d. ensure members attendance and chair GRG meeting;
- e. ensure simple complaints (like notification of when construction starts or a copy of the entitlement brochure etc.) are handled /resolved at the local level during the meeting;
- f. ensure that records (of each meeting, communication between GRG and complainant(s)) is accurately recorder by assigned member (Meeting Secretary) and saved in the GRG files;
- g. convey requests and enquiries of the complainants to GRG members on Central Level if not resolved on Local Level.

### ***RMU Representative***

260. Once notified of a complaint and summoned by the LPC to a grievance meeting the RMU representative will:
1. Review all relevant recording of complaints and submitted documents of proof;
  2. Participate to all grievance meetings, provide opinions and analysis, take minutes of the discussions (Secretary of the Meeting);
  3. Accompany eventual assessment/valuation specialists in the field;
  4. Ensure that claims from damages due to construction works are reviewed by the RMU and technical experts and assess the damages /losses incurred;
  5. Based on the position reports of GRG members and on his/her understanding of the case prepare the final grievance report and recommendations to be sent to complainant, other members of the GRG and if needed to IPIG as well. The summary report should determine, whether the case is:
    - (i) solved without further action; or
    - (ii) solvable but requires compensation or other action; or
    - (iii) not resolved and requires pending actions, such as forwarding the complaint for review on the higher-Central Level, to the Court, or to investigation to prosecutor's office.
  6. If the complaint is considered valid and the needed compensation/action is to be approved by IPIG the case is forwarded to GRG on Central Level with the request to proceed the review and ensure execution of the redress action; and
  7. When the complaint remains unresolved by Local Level GRG, and a complainant offered to lodge claim on the Central Level agree to act so, RMU representative coordinates with LPC and GRG Chairman to assists the complainant in lodging the complaint at a higher appeal level;
  8. In parallel inform IPIG/MoTR and proceed with the organization of the central level appeal meeting.

### ***Representatives of the APs***

261. Two representatives of the APs, male and female persons from the affected community will participate in all GRG meetings to:
1. act as the full right member of GRG;
  2. provide relevant information related to the submitted complaints; and
  3. provide other GRG members as relevant with a position note to be reflected in the final meeting report.

### ***Invited Consultant /Field expert***

262. Once notified of Meeting time and location the Consultant will:
- Review all relevant recording of complaints and submitted documents of proof;
  - If feasible visit the place of complaint to visually observe the spot and be fully aware of important details to share with GRG members during the meeting;
  - assist the GRG members to get into the insight of the complaint and assist them in finding feasible, reasonable, mutually agreeable and doable solutions.

***IPIG Project Coordinator***

263. Once notified that a complainant has lodged an appeal case at the Central level IPIG project coordinator will:
- contact the complainant(s) and draft a note with his/her understanding of the complaint;
  - participate to the appeal meeting, provide opinions and analysis, take minutes of the discussions;
  - if needed summon again assessment/valuation specialists and accompany them in the field;
  - request the chairperson to organize meetings, as necessary;
  - maintain communication between GRG and the complainants; and
  - Complaint Register is kept with IPIG and a copy shared with the Consultant.

***Representatives of IPIG Safeguards Unit***

264. Once notified that a complainant has lodged at central:
- participate to all grievance meetings, provide opinions and analysis;
  - accompany eventual assessment/valuation specialists in the field, and
  - provide other GRG members as relevant with a position note to be reflected in the final meeting report.

***Ombudsman***

265. Once notified of a complaint and a summoned by the LPC to a grievance meeting is submitted the Ombudsman will:
- monitor complaint handling process and ensure that decisions made by the GRP are equitable and objective;
  - provide independent opinions and recommendations related to the decision made on the case by the GRP team;
  - advise the complainant(s) on their rights and entitlements, as necessary;
  - participate to all GRG meetings and site visits;
  - participate in eventual assessment/valuation in the field; and
  - prepare a position memo at the end of the meeting(s) and forward it to LPC/chairperson of the GRG.

***GRG Chairperson/Head of IPIG of MoTR***

266. Once notified that a complainant has lodged an appeal case at central level, the GRG chairperson will:
- contact the complainant(s) and draft a note with his/her understanding of the complaint;
  - trigger the GRG members through a letter of invitation;
  - chair the GRG meetings and ensure that minutes of the meeting are shared with all relevant parties;
  - review the content of each response prepared after deliberations to ensure accuracy as well as consistency of answers provided to the complainants;

5. ensure the administrative and organizational support for GRG members to work; and
6. support the decision made by the GRG and ensure that the follow-up actions are taken.

### ***IPIG Project Coordinator***

267. Once notified that a complainant has lodged an appeal case at central level project coordinator will:
1. contact the complainant(s) and draft a note with his/her understanding of the complaint;
  2. participate to the appeal meeting, provide opinions and analysis, take minutes of the discussions;
  3. if needed summon again assessment/valuation specialists and accompany them in the field;
  4. request the chairperson to organize meetings, as necessary;
  5. maintain communication between GRG and the complainants; and
  6. Complaint Register is kept with IPIG and a copy shared with the Consultant.

### ***Representatives of IPIG Safeguards Unit***

268. Once notified that a complainant has lodged at central level, the representatives of IPIG safeguard and technical unit will:
1. prepare the chronology of events to understand sequence of developments prompting the complaint;
  2. provide environmental and resettlement opinion on impacts claimed by the claimant;
  3. examine large claims over USD\$10,000 with financial expert at Ministry and involve a qualified evaluator;
  4. request the chairperson to organize meetings, as necessary; and
  5. maintain communication between GRG and the complainants.

### ***Technical Experts***

269. Once summoned to provide expert advice for the assessment or valuation of an impact claimed by a complainant the relevant technical expert will carry out the needed investigations and prepare a report to be handed to the complainant and the other members of the GRG. The tasks will include:
1. provision of relevant technical opinion for the case reviewed;
  2. carry out the needed investigations relevant to their expertise; and
  3. provide recommendation when the legal opinion from the relevant state agencies is necessary.

## **2.4. Grievance Resolution Process**

270. The LPC of GRGs will be regularly available and accessible for APs to address concerns and grievances. He will assist the aggrieved APs in formally lodging their claims to the GRG. The complaints and grievances from the APs will be addressed through the process described in Table 20.



**Table 20: Grievance Resolution Process Steps**

|        | Action level              | Process   | Timeline |
|--------|---------------------------|---|----------|
| Step 1 | Resolution                | At initial stage, the LPC will give hearing to the aggrieved person and try to give acceptable solutions. If any aggrieved AP is not satisfied with the solutions, then the aggrieved AP will lodge grievances in written to the concerned local GRG within 3 days.   | 3 days   |
| Step 2 | GRG Resolution            | After receiving written complaints of AP, the LFP will review and prepare a Case File for GRG hearing and resolution. A formal hearing will be held with the GRG at a date fixed by the LPC in consultation and the aggrieved APs. On the date of hearing, the aggrieved AP will appear before the GRG at the office of concerned Ayil-Okmotu and produce proof in support of his/her claim. The LPC will note down the statements of the complainant and document all proof. The decisions from majority of the members will be considered final from the GRG and will be issued by the LPC and signed by other members of the GRG. The case record will be updated and the decision will be communicated to the complainant AP by the LPC within 14 days of submission. If any aggrieved AP is not satisfied with the solutions, then the LPC will lodge grievances in written to the central GRG at MoTR with conclusion and supporting documents prepared at local level. | 14 days  |
| Step 3 | Resolution of GRG Central | After receiving written complaints of AP, the GRG Chairperson of the central GRG will review and prepare a Case File for GRG hearing and resolution. A formal hearing will be held with the GRG at a date fixed by the GRG Chairperson and the aggrieved APs. GRG members will contact the complainant and visit his village. The IPIG Project Coordinator will note down the statements of the complainant and document all proof. The decisions from majority of the members will be considered final from the GRG and will be issued by the GRG Chairperson and signed by other members of the GRG. The case record will be updated and the decision will be communicated to the complainant AP by the IPIG Project Coordinator within 15 days of submission.  | 15 days  |
| Step 4 | Court of law              | The court of law will be the last resort before the AP. Project Affected Persons can appeal to court should s/he disagrees with the decision of the Control Authority.  | N/A      |

### 3. Additional Mechanisms Available for Grievance Redress

271. Any physical and legal person, any appellant can communicate his/her concern to the Court at any stage of grievance redress. The GRC will not restrict or influence the AP from applying to court for legal remedies.
272. If the complaint is found invalid, the GRG formulates a response and sends a written letter to the complainant, explaining the reasons of rejection. The complainant can appeal the decision of the local Court and bring the case to the ADB Accountability Mechanism. The project level GRG does not in any way impede APs access to the ADB Accountability Mechanism (AM3) or to the judicial or administrative remedies the Kyrgyz Republic.
273. The Information Pamphlet and Grievance Redress Form will carry the contact information for the Office of the Special Office Facilitator to be readily available once any AP may wish to register a complaint with the ADB AM.

<sup>3</sup> Link to access relevant web page: [www.adb.org/site/accountability-mechanism/contacts](http://www.adb.org/site/accountability-mechanism/contacts)

#### Complaint Receiving Officer

Accountability Mechanism  
Asian Development Bank  
6ADB Avenue, Mandaluyong City 1550  
Metro Manila, Philippines  
Tel: +632 632 4444 ext 70309  
Fax: +632 636 2086 [Email contact form](#)

## **I. Environmental Management Plan**

### **1. EMP**

- 274. The EMP describes the various measures proposed under this Project, which were designed to avoid, mitigate, or compensate the adverse environmental impacts that may result from the Project. As such the EMP considers all phases of the Project cycle, namely the detailed design, construction and operational phases of the Project.
- 275. To ensure that the proposed mitigation measures will be carried out by the contractors during the construction stage, the design consultant will clearly set out in the tender and contract documents the contractor's obligation to undertake the respective environmental mitigation measures.
- 276. The EMP consists of two tables. Table 21 summarizes the environmental mitigation measures, while Table 22 provides an overview of the environmental monitoring. At the end is a statement which includes the timeframes and responsibilities for carrying out the environmental monitoring.

**Table 21: Environmental Management Plan**

| MITIGATION MEASURES DURING DESIGN, CONSTRUCTION AND OPERATION |  |   |  |                              |                           |
|---|--|---|--|------------------------------|---------------------------|
| Area/<br>Component  | Activity   | Potential<br>Impact   | Mitigation measures  | Institutional Responsibility |                           |
|   |  |   |  | Implement                    | Monitor                   |
| DETAILED DESIGN PHASE   |  |   |  |                              |                           |
| General   | Incorporation of<br>EMP into Bid<br>Document                             | All impacts   | All environmental managing activities described in IEE and, therefore, required activities by the Contractor shall be clearly indicated in the Technical Specification of Bid Document   | Design Consultant            | IPIG of MoTR              |
| Water   | Construction of<br>bridges, culvert<br>and embankment                    | Water<br>contamination<br>by earth work<br>and erosion of<br>embankment   | Bridges and culverts shall be designed with enough capacity of water flow together with erosion prevention work. The river bank and the pond can be considered as ecological relevant sites which warrant special consideration. As for muddy runoff water from embankment, installation of side drain and sediment pond shall be considered.  | Design Consultant            | IPIG of MoTR              |
| Flora and fauna   | Approximately 38<br>trees need to be<br>felled on the<br>Kochkor – Epsin | Tree losses that<br>cannot be<br>prevented. Main<br>species are<br>Populus alba,<br>Elm                               | Determine the requirements for management of trees.<br><br>Any tree losses are compensated by new plantations. Plantations shall be conducted after technical works have been completed. Planting time shall be restricted to spring (March till April) and/or autumn (September till October).<br><br>Locations for tree plantings are within the existing Right of Way (RoW) at the locations where tree losses occur.<br><br>Trees to be planted shall have the following parameters: 1,5 – 2 m height, age 5 – 6 years. Distance in between individual trees shall be 6 – 8 m.<br><br>Species: Populus alba (30%), Elm (70%), and deciduous shrubs Lohan in the villages   | Design Consultant            | IPIG of MoTR              |
| Cultural and<br>historical site                               | Cultural and<br>historical<br>protection.<br><br>and sites               | Potential<br>Construction<br>works impacts<br>on cultural and<br>historical sites<br>and monuments<br>finding chance. | The objects of historical and cultural heritage are the objects of study and protection of the Ministry of Culture, Tourism and Information of the Kyrgyz Republic (MoCIT KR).<br><br>• To prevent exposure to these objects it is necessary to develop Management plan for cultural and historical sites, according to the law protection zone of objects is not less than 50 m. Therefore, all questions related to the establishment of protection zones, procedures, management plans should be coordinated with MoCIT KR and local government.<br><br>• On the basis of the findings of Archaeological Study (Appendix F), during the detailed design stage, Consultant should send the road design along with the Management plan for objects of cultural heritage for MoCIT KR approval.<br><br>Conduct visual observation of the objects in cemeteries and mausoleums to document their state before the construction works jointly with MoCIT KR and local authorities. | Design Consultant            | IPIG of MoTR,<br>MoCIT KR |

|   |  |   |   |                      |                 |
|---|--|---|---|----------------------|-----------------|
| Environment<br>Safeguard<br>Training    | Training of<br>environmental<br>specialist through<br>seminar                                  | Reduce negative<br>environmental<br>impacts   | Allocation of environmental specialist and<br>preparation for seminar at construction<br>stage shall be planned   | Design Consultant    | IPIG of MoTR    |
|   | Health and safety<br>promotion for<br>employee and<br>local residents                          | Safety issues.<br>Occupational<br>accident, traffic<br>accident, spread<br>of HIV/STD | The Contractor shall be provided to<br>ensure Occupational Safety and Health<br>Act (OSHA) in Technical Specifications  | Design Consultant    | IPIG of MoTR    |
| Slope Stability                         | Work to expand<br>the road on the<br>mountains sites<br><br>Earth filling and<br>slope cutting | Erosion/Landslide   | To technical reduce soil erosion process<br>and slope failure due to river erosion,<br>earthquake or peculiar geological<br>conditions, the technical designing shall<br>include:<br><br>• Slopes of cuts and embankments shall<br>be arranged with account to soil stability<br>and other conditions according to the<br>Technical Specification on erosion/slope<br>failure protection;<br><br>• In the areas with steep slopes the<br>project shall include rock fall protection<br>design, rip-raps, protection structures and<br>gabions;<br><br>• For embankments higher than 6<br>meters, a step-like slopes must be<br>arranged<br><br>Interception ditches must be arranged at<br>the slope tops in the cut-off areas, or on<br>the benches. For steep slopes drainage<br>systems must be arranged to intercept<br>water flows and their diversion from the<br>slopes. | Design Consultant    | IPIG of MoTR    |
| Livestock and<br>pedestrian<br>crossing | Road traversing<br>cattle crossings  | Accidents<br>because of<br>collision with<br>cattle                                   | In the bit document, specify flowing:<br><br>Impacts from the road may include cattle<br>crossing the road. This will be clarified<br>during public hearings at the detail design<br>stage. Depending on the situation,<br>mitigation measures will be specified as<br>appropriate. Possible mitigation<br>measures would be the provision of<br>warning signs in accordance with relevant<br>road safety standards. In addition,<br>reflectors may be provided on trees in the<br>critical sections and the road fenced near<br>pastures.<br><br>The crossing of people in the residential<br>areas will be installed through every 200-<br>250 m.   | Design<br>Consultant | IPIG of<br>MoTR |
| Bus stop                                | Designing of bus<br>stop bay   | Without bay,<br>traffic flow be<br>disturbed  | Determination of bus stop location after<br>discussion with local communities   | Design<br>Consultant | IPIG of<br>MoTR |
| Powerline                               | Cutting of slope   | Falling down<br>of pylons on<br>the slope   | Attention shall be paid at designing road<br>to minimize the impact to these<br>powerlines/pylons when they very closely<br>located to the road.  | Design<br>Consultant | IPIG of<br>MoTR |

| MITIGATION MEASURES DURING DESIGN, CONSTRUCTION AND OPERATION |   |   |  |                              |                         |
|---|---|---|--|------------------------------|-------------------------|
| Area/<br>Component  | Activity  | Potential<br>Impact   | Mitigation measures  | Institutional Responsibility |                         |
|   |   |   |  | Implement                    | Monitor                 |
| CONSTRUCTION PHASE  |   |   |  |                              |                         |
| General   | Submittal of applications/ site specific management plans before commencement of work | Project impacts will be minimized   | To submit General Site Specific Management Plan including following 11 annexes:<br><br>(i) Method Statement for Construction<br>(ii) Dust Suppression Plan<br>(iii) Construction Noise Suppression Plan<br>(iv) Surface Water Contamination Prevention Plan<br>(v) Borrow Pits Management Plan<br>(vi) Soil Management Plan<br>(vii) Solid and Liquid Waste Management Plan<br>(viii) Cultural & historical sites Management Plan<br>(ix) Safety Management Plan<br>(x) Camp and Workshop Management Plan<br>(xi) Material Processing Plants/Equipment and Storage Facilities Plan   | Contractor                   | CSC, SETI, IPIG of MOTR |
| Environmental specialist                                      | Supervising of Contractor's environmental activity and reporting to IPIG              | To follow the EMP   | Mandatory half year report on monitoring of the environment should be prepared and submitted to IPIG/MOTR. Data for this report will be collected by the results of the quarterly reports of environmental specialist of CSC. Once a year International environmental specialist will conduct the complex control  | Contractor                   | MoTR                    |
| Committee of Grievance Redressing                             | Establishment and organizing the CGR Complain   | Solve disputes immediately Establishment and organizing the CGR                   | GRM to be mandatory implemented in this project, where affected people can be fully informed about the rights and procedures of grievance redress mechanism, during consultation, survey, date of compensation and project implementation.   | CSC                          | CSC, SETI, IPIG/MORT    |
| Method statements   | Consrution of bridges, culverts, road etc.  | Clarifying what are the possible risk/environmental impacts to be caused          | Descript construction details such as sequences, material used, size, duration etc.  | Contractor                   | CSC, SETI, IPIG of MOTR |
| Air pollution   | Operation of construction machinery   | Air pollution due to exhausted gases from the operation of construction machinery | Sensitive receptors for the Section Kochkor (km 64) – Epkin (89 km) should be considered as a regions for mitigation the air quality, noise/vibration. To reduce emission levels of both of noise and vibration together with exhausted gases in general, the contractor must implement the following mitigating measures (i) keep construction equipment in good condition (ii) prevent idling of engines by shutting off machineries not in use for more than 3 minutes (iii) prohibit use of machinery or equipment that cause excessive smoke emissions (iv) utilize low- emission type machineries and (v) install tentative noise (air pollution) barrier, if necessary.<br><br>Unnecessary overdriving also be prohibited, use the mechanisms with less level of emission. These measures are effective to reduce noise levels as well. | Contractor                   | CSC                     |

| MITIGATION MEASURES DURING DESIGN, CONSTRUCTION AND OPERATION |  |  |  |   |   |
|---|--|--|--|---|---|
| Area/<br>Component  | Activity   | Potential<br>Impact  | Mitigation measures  | Institutional Responsibility  |   |
|   |  |  |  | Implement   | Monitor   |
| CONSTRUCTION PHASE  |  |  |  |   |   |
|   |  | Dust rising by earth work and lorry running over before-paved road in sensitive area | Spray water over the surface of unpaved road every 2 hours around sensitive receptors area when it is dry and wind is strong, based on the Site- Specific Dust Suppression Plan to be submitted before construction. Hauling truck shall be covered always.<br><br>Material transport route shall be planned properly incorporating to Dust Suppression Plan. Estimates from the preliminary design for the section show those 668,000 cubic meters will be the cut volume and 135,600 cubic meters for fill volume for the road section. Truck traffic will considerably impact local roads as well as the communities they traverse. Haul routes should be planned with CSC in coordination with IPIG and local authorities, providing sufficient maintenance to minimize dust, noise generation and disturbance to residents by restricting the hauling time between 07:00 and 18:00.   | Contractor  | CSC   |
| Noise and vibration   | Rehabilitation works within villages and along sensitive receptors | Disturbance of adjacent settlements due to elevated noise and vibration levels.      | Construction Noise Suppression Plan shall be submitted.<br><br>Noise must be limited to 70 dB(A). For sensitive receptors such as schools and hospitals applicable noise standards shall be complied with as far as technically feasible by means of noise measurements and in case of exceedance of standards, ascribe of time restrictions for construction activities shall be limited between 7:00 - 18:30 in urban areas and 06:00 – 19:00 within 500 m of settlements as well as limiting hauling traffic through settlements. Restrict speed limit to 30 km/hr within 500m of any settlements.<br><br>All be made by certified machinery only which complies with all KR laws concerning noise and vibration at construction sites Guidelines values are for noise levels measured out of doors. Source: Guidelines for Community Noise, World Health Organization (WHO), 1999.<br><br>For acceptable indoor noise levels for residential, institutional, and educational settings refer to WHO (1999). Environmental noise directive 2002/49/E C.<br><br>SN 2.2.4/2.1.8.562-96 “Noise at work sites, living premises, and public buildings and within residence construction site”; SN 2.2.4/2.1.8.566-96 “Production vibration. Vibration in premises, residence and public buildings”. | Contractor  | CSC; IPIG of MoTR, Traffic police service of the Ministry of home affairs |
|   |  |  |  |   |   |
|   |  | Rehabilitation works along sensitive receptors such as cultural sites.               | Vibrations may result in damage to cultural structures.  | For sensitive receptors such as cultural sites, prior construction works, the Contractor should apply in writing to the local authorities in defining the protection zones around these sites.<br><br>Applicable vibration standards shall be | Contractor  |

| MITIGATION MEASURES DURING DESIGN, CONSTRUCTION AND OPERATION |   |   |  |                              |                         |
|---|---|---|--|------------------------------|-------------------------|
| Area/<br>Component  | Activity  | Potential<br>Impact   | Mitigation measures  | Institutional Responsibility |                         |
|   |   |   |  | Implement                    | Monitor                 |
| CONSTRUCTION PHASE  |   |   |  |                              |                         |
|   |   |   | <p>complied with as far as technically feasible by means of vibration measurements and in case of exceeded of standards, contractor should strictly utilize equipment with less vibration impact.</p> <p>In addition, haul routes and construction site access roads should be discussed and jointly approved between the contractor and local officials to minimize the risk of conflicts.</p> <p>Physical cordon around identified sites should be installed to minimize construction impact and alert workers/people from disturbing archaeological sites, especially near the following Cemeteries:</p> <ul style="list-style-type: none"><li>• 68 km Cemetery on the (RHS) 2-3 m away from the road</li><li>• 70 km Cemetery (LHS) 2-3 m away from the road.</li><li>• 83 km Cemetery (LHS) 50-70 m from the road</li></ul> |                              |                         |
| Surface water   | Rehabilitation works  | Competition for water resources   | Conduct consultation with local authorities to identify sources of water (for spraying and other construction requirements) that will not compete with the local population.   | Contractor                   | CSC                     |
|   | Culverts and 4 Watercourses as:<br><br>(i) Zhon-Aryk (km 64.4)<br><br>(ii) Mukan (Km 68.0)<br><br>(iii) Ak-Uchuk (Km 86.5)<br><br>(vi) Zharkoomdu (km 88.8) | Alteration of surface water hydrology resulting in increased sediment by increased soil erosion at construction site. | Installation of settlement ponds at locations where construction site comes close to natural watercourses to retain sediments and mitigate possible impacts on water hydrology. Oil and solid waste management need to be described in the SSEMP and consider these sensitive receptors (rivers and their floodplains). No campsite is allowed near river floodplains.   | Contractor                   | CSC, SETI, IPIG of MoTR |
|   |   | Pollution surface water   | During the construction of bridges construction site dimensions shall be the minimum necessary. Construction site should be placed at levels that exclude them flooding. The discharge of polluted water, landfills, parking cars and the construction of temporary facilities within the water protection zones on the banks of rivers. On construction sites should provide capacity for the collection of sewage and garbage. The roads within the water protection zones should include the collection of water from the roadway surface with its subsequent treatment or sewage in into place, eliminating the pollution of water sources. The quality of discharges into water bodies must meet the established requirements.  | Contractor                   | CSC, SETI, IPIG of MoTR |
|   |   |   | <p>In the water protection zones (not less than 75m) of river it prohibits contamination of the surface of the earth, including the garbage dump, waste production, as well as parking, cleaning</p>   |                              |                         |

| MITIGATION MEASURES DURING DESIGN, CONSTRUCTION AND OPERATION |   |   |   |                              |              |
|---|---|---|---|------------------------------|--------------|
| Area/<br>Component  | Activity  | Potential<br>Impact                     | Mitigation measures   | Institutional Responsibility |              |
|   |   |   |   | Implement                    | Monitor      |
| CONSTRUCTION PHASE  |   |   |   |                              |              |
|   |   |   | <p>and repair of motor vehicles and road construction machinery, fueling. All works in water protection zone must be carried out based of permission from local authorities.</p> <p>The water protection zone is prohibited production of local building materials without permits and approvals of environmental authorities.</p> <p>The project documentation should include the restoration work after the construction of the bridge: the removal of the bed of the river banks, backfilled during the construction of supporting structure; cleaning of the river bed and the flood plain from cluttering their objects, extracting and hauling piles of scaffolding and temporary supports; dismantling of temporary facilities on the construction site and land reclamation, including borrow area and access roads.</p>  |                              |              |
| Borrow Area   | Exploitation of material such as sand, gravel and clay, | Loss of fauna, water/air contamination, | <p>Should the Contractor be sourcing the materials from existing and operational quarry site, the contractor should exert influence on the operator that all required permits from local authorities, get approval from territorial departments of SAEPF are obtained and proper operational and management measures be instituted to minimize impacts to the general environment.</p> <p>On the other hand, should the Contractor open a new borrow site, government permits are also required and borrow pit management plan will be developed as SSEMP. The guidelines indicated below should be followed to minimize impacts associated with the operation of borrow areas:</p> <ul style="list-style-type: none"><li>• Location of the borrow pit</li><li>• Capacity and operation hours of a borrow pit;</li><li>• Development and extraction sequence of borrow pit;</li><li>• Technique and mechanisms for stripping and excavation operations;</li><li>• Operation and time schedule for borrow pit development;</li><li>• Extraction method and transport plan, including route(s);</li><li>• Safety rules and hours of operation;</li><li>• Expected quality of extracted materials;</li><li>• Topsoil storage/protection and environment protection steps; and,</li><li>• Rehabilitation of disturbed lands when site is decommissioned.</li><li>• Calculation of mobile sources' emission charge.</li><li>• Dust suspension plan during excavation and transporting</li></ul> <p>Prior to start material extraction the contractor shall submit above plan</p> | Design Consultant            | IPIG of MoTR |



| MITIGATION MEASURES DURING DESIGN, CONSTRUCTION AND OPERATION |  |   |  |                              |                             |
|---|--|---|--|------------------------------|-----------------------------|
| Area/<br>Component  | Activity   | Potential<br>Impact   | Mitigation measures  | Institutional Responsibility |                             |
|   |  |   |  | Implement                    | Monitor                     |
| CONSTRUCTION PHASE  |  |   |  |                              |                             |
|   |  |   | through the CSC to the Safeguard Department of the IPIG of the MoTR.   |                              |                             |
| Soil Management Plan  | Top soil preservation  | Loss of top soil  | <p>Removing of top soil occurring within site clearing corridor. Topsoil shall be removed and stored for reuse. Long-term stockpiles of topsoil will immediately be protected to prevent erosion or loss of fertility. For erosion protection, it will be sown with a fast-growing vegetation, e. g. grass</p> <p>Topsoil on the sections to be used as a stockpile for surplus construction material shall be removed and stockpiled to reuse them to cover these areas upon completion of works. Topsoil on the sites to be used as back-up sites for storage of surplus building materials must be removed and stockpiled to use them to cover these areas after the completion of the work. In addition, a soil management plan shall be provided detailing measures to be undertaken to minimize effects of wind and water erosion on stockpiles, measures to minimize loss of fertility of top soil, timeframes, haul routes and disposal sites.</p>   | Contractor                   | CSC, SETI, IPIG of MoTR     |
| Solid and Liquid Wastes Management                            | Siltation of surface waters and/or impact on soils due to improper disposal of excess materials  | Contamination of water and soil   | <p>Prevention of dumping of waste into river/open spaces</p> <p>Solid and liquid wastes generated during construction shall be properly treated as per SSEMP prepared. Any material including excess soil excavated, chemical, liquid waste, construction rubbishes shall not be dumped into river all time. Only the runoff water, after removal of muddy particles, can be released into river.</p>  | Contractor                   | CSC                         |
| Cultural and Historical site                                  | <p>Cultural and historical sites protection.</p> <p>Cemeteries</p> <ul style="list-style-type: none"><li>located at km 68</li><li>located at km 70</li></ul> | Potential Construction works impacts on cultural and historical sites and monuments finding chance. | <p>Specify the following as a requirement for the Contractor</p> <p>Objects of historical and cultural heritage are the objects of study and protection of the Ministry of Culture and Tourism of the Kyrgyz Republic (MCT of KR).</p> <p>In accordance with the Law of the Kyrgyz Republic on historical cultural heritage in the event of cultural monuments found, Contractor must stop all construction works and report the findings to the local executive authorities or any other competent organization (Institute of History and Cultural Heritage, National Academy of Sciences; Department of History, Kyrgyz National University after Balasagyn), MoCIT KR.</p> <p>Also, Contractor should employ techniques during construction works (vibration) with minimal or no impact to any cultural, historical or archeological structures along the road. Physical cordon around identified sites should be installed to minimize construction impact and alert workers/people from disturbing archaeological sites</p> | Contractor                   | CSC, IPIG of MoTR, MoCIT KR |

| MITIGATION MEASURES DURING DESIGN, CONSTRUCTION AND OPERATION |                                |  |  |                              |   |
|---|--------------------------------|--|--|------------------------------|---|
| Area/<br>Component  | Activity                       | Potential<br>Impact                                    | Mitigation measures  | Institutional Responsibility |   |
|   |                                |  |  | Implement                    | Monitor   |
| CONSTRUCTION PHASE  |                                |  |  |                              |   |
|   |                                |  | <p>The cemeteries are in 2-3 meters from the road right of way. According to the design of the road, widening of the road section will have no impact on these objects, on the issue of resettlement or land acquisition. The expansion of the road is planned within the existing right of way and will be held on the opposite site from cemeteries.</p> <p>Measures to mitigate the impact on the cultural monuments (cemetery):</p> <ul style="list-style-type: none"><li>• During the work, it is necessary to inform the local authorities on the construction works around these sites.</li><li>• It is necessary that local authorities carried out the control and monitoring of these areas, during the construction works.</li><li>• To protect these cultural sites, it is necessary to arrange physical barriers (fencing).</li><li>• During the construction works, it is necessary to assign an expert on traffic management, to prevent causing of physical damage by the machines and mechanisms to the cultural objects.</li><li>• It is necessary to conduct outreach to workers on the strict prohibition of physical destruction, desecration and pollution data objects.</li><li>• It is necessary to post warning signs and information signs for the workers.</li><li>• Limiting the operation of machines and mechanisms, which create high levels of noise and vibration.</li><li>• Dust suppression works.</li><li>• All road equipment must be used within the territory allotted for construction site.</li></ul> |                              |   |
| Safety and health   | Traffic safety management      | To improve traffic safety for pedestrians and vehicles | <p>Traffic safety program for especially around the sensitive receptors by installing necessary safety measures specified in the design or in the Technical Specifications to ensure that community and traffic safety issues during the construction phase of the Project, including incorporation of:</p> <p>(i) Safety barriers;</p> <p>(ii) Traffic signs;</p> <p>(iii) Road crossings;</p> <p>(iv) Speed bumps,</p> <p>(v) Speed limits and</p> <p>(vi) Flagman when necessary.</p> <p>(vii) information to the public about the scope and schedule of construction activities and expected disruptions and access restrictions</p>   | Contractor                   | CSC, IPIG of MoTR, local health units of the Ministry of Health |
|   | Occupational safety management | For health and safety protection of workers and        | For occupational safety, following shall be provided:  | Contractor                   | CSC;  |

| MITIGATION MEASURES DURING DESIGN, CONSTRUCTION AND OPERATION |                                 |   |  |                              |         |
|---|---------------------------------|---|--|------------------------------|---------|
| Area/<br>Component  | Activity                        | Potential<br>Impact                               | Mitigation measures  | Institutional Responsibility |         |
|   |                                 |   |  | Implement                    | Monitor |
| CONSTRUCTION PHASE  |                                 |   |  |                              |         |
|   |                                 | adjacent communities                              | (i) Adequate health care facilities (including first aid facilities) within construction sites with a nurse shall be stationed while a doctor who shall visit regularly and when necessary.;;<br><br>(ii) Training of all construction workers in basic sanitation and health care issues, general health and safety matters, and on the specific hazards of their work;<br><br>(iii) Personal protection equipment for workers, such as safety boots, helmets, gloves, protective clothing, goggles, and ear protection in accordance with KR legislation;<br><br>(iv) Clean drinking water to all workers;<br>(v) Adequate protection to the general public, including safety barriers and marking of hazardous areas;<br><br>(vi) Safe access across the construction site to people whose settlements and access are temporarily severed by road construction;<br><br>(vii) Adequate drainage throughout the camps so that stagnant water bodies and puddles do not form;<br><br>(viii) Sanitary latrines and garbage bins in construction site, which will be cleared when reaching capacity by the contractors to prevent outbreak of diseases.          |                              |         |
| Maintenance of Access during Construction                     | Construction of bridges/culvert | Interference of public traffic                    | Detour shall be constructed and be properly maintained.  | Contractor                   | CSC;    |
| Camp, operation and construction sites                        | Installation of camp/workshop   | Surface water contamination, disease transmission | The contractor shall submit documents for approval (short statement and site plan in appropriate scale) which indicate:<br><br>Site location, surface area required and layout of the work camp. The layout plan shall also contain details of the proposed measures to address adverse environmental impacts resulting from its installation.<br><br>Sewage management plan for provision of sanitary latrines and proper sewage collection and disposal system to prevent pollution of watercourses;<br><br>Waste management plan covering regular collection and disposal in a hygienic manner, as well as proposed disposal sites for various types of wastes (e.g., domestic waste, used tires, etc.) consistent with appropriate regulations;<br><br>Description and layout of equipment maintenance areas and lubricant and fuel storage facilities including distance from water sources and irrigation facilities. Storage facilities for fuels and chemicals will be located away from watercourses. Such facilities will be bounded and provided with impermeable lining to contain spillage and prevent soil and water contamination. Prior to the | Contractor                   | CSC     |

| MITIGATION MEASURES DURING DESIGN, CONSTRUCTION AND OPERATION |  |  |   |                              |   |
|---|--|--|---|------------------------------|---|
| Area/<br>Component  | Activity   | Potential<br>Impact                        | Mitigation measures   | Institutional Responsibility |   |
|   |  |  |   | Implement                    | Monitor   |
| CONSTRUCTION PHASE  |  |  |   |                              |   |
|   |  |  | commencement of works the site installations shall be inspected for approval. The selected site will not be on top of ground water area or near surface waters.   |                              |   |
|   |  | Enhance the safety and health of workers   | To provide an Environmental and Safety Officer (ESO), under which an Environmental Officer (EO) and a Safety Officer (SO) also be provided. Their roles are to provide environmental and safety training to the employees and surrounding residents according to the requirements of the individual work place. Prior to the commencement of works, the work site personnel shall be instructed about safety rules for the handling and storage of hazardous substances (fuel, oil, lubricants, bitumen, paint etc.) and the cleaning of the equipment. In preparation of this the contractor shall establish a short list of materials to be used (by quality and quantity) and provide a rough concept explaining the training / briefing that shall be provided for the construction personnel. The contractor shall provide information to workers, encouraging changes in individual's personal behavior and encouraging the use of preventive measures. The goal of the information is to reduce the risk of HIV / STD transmission among construction workers, camp support staff and local communities. | Contractor                   | CSC, IPIG of MoTR, local health units of the Ministry of Health |
| Asphalt, Concrete and Crushing Plant                          | Site selection. operation of aggregate crusher   | Increased dust emission and noise emission | Careful site selection of aggregate crusher in order not to interfere with any sensitive receptor. Distance to next settlement and residential houses at least 500 m downwind. Site selection for aggregate crusher has to be approved by the Safeguard Department in the IPIG of the MoTR.   | Contractor                   | CSC, IPIG of MoTR   |
|   | Site selection. operation of asphalt plant   | Odor emission and safety risks             | Asphalt plants shall be 500 m downwind from any settlements and residential houses.<br><br>Provide spill and fire protection equipment and submit an emergency response plan (in case of spills, accidents, fires and the like) to the authority in responsibility prior to operation of the plant.<br><br>Secure official approval for installation and operation of asphalt plants from MoTR.   | Contractor                   | CSC, IPIG of MoTR   |
| Powerline   | Cut of slope   | Falling down of pylon on the slope         | Implement slop cutting carefully as per predetermined.  | Contractor                   | CSC, IPIG of MoTR, Electricity Department                       |
| Flora and fauna   | Road alignment in areas of tree plantations. Embankment filling of the tree stem area. | Tree losses due to embankment fill.        | A maximum fill up of the tree stem area of 30 cm can be accepted. Fill up material in the tree stem area has to be organic soil.<br><br>A filling up of more than 30 cm will damage the tree. In this case cutting can't be prevented and a new tree is to be   | Contractor                   | CSC, SETI, IPIG of MoTR   |

| MITIGATION MEASURES DURING DESIGN, CONSTRUCTION AND OPERATION |   |   |   |                              |                         |
|---|---|---|---|------------------------------|-------------------------|
| Area/<br>Component  | Activity  | Potential<br>Impact   | Mitigation measures   | Institutional Responsibility |                         |
|   |   |   |   | Implement                    | Monitor                 |
| CONSTRUCTION PHASE  |   |   |   |                              |                         |
|   |   |   | planted as a compensation measure at the respective location within the existing RoW.<br><br>Species to be planted are walnuts, maple ash tree, elm tree, white poplars, white willow, white acacia.<br><br>Plantings shall be conducted after technical works have been completed. Planting time shall be restricted to spring (March till April) and/or autumn (September till October). Quality of newly to be planted trees shall be 16 to 18 cm of stem circumference at least in 1,5 m height.  |                              |                         |
|   | Bottom of embankment of designed road lying very close to tree rows   | Potential damaging of trees during construction activities        | Implementation of a temporary vegetation protection fence during construction activities.   | Contractor                   | CSC, SETI, IPIG of MoTR |
| Disturbance of Farm Land                                      | Construction activity near farm land  | Farm land soil compaction due to operation of heavy equipment     | Confine operation of heavy equipment within the corridor that is necessary for the road construction to avoid soil compaction and agricultural used land close to the road.   | Contractor                   | CSC                     |
| Existing infrastructures                                      | Construction activities in close vicinity to existing infrastructure such as water supply pipes and other facilities, waste water discharge facilities, electricity lines, etc. or directly destroy existing pavement, bridge, power line system and culverts | Damage to infrastructure, supply cuts of infrastructure services. | Measures will be ensured to avoid any disturbance to the existing infrastructure.<br><br>Prior to construction start the respective service agencies shall be informed about the construction work.<br><br>Coordinate with respective agencies and provide prior information to the public in case of any required disruption in services during construction   | Contractor                   | CSC; IPIG of MoTR       |
| Utilization of Wasted Asphalt                                 | Removal of asphalt  | Water/soil contamination  | Old asphalt pavement will be removed and be replaced in the new pavement. Storage or stockpile areas of old asphalt should be situated where they pose no risk of contamination to the environment. In coordination with local authorities, location of old asphalt stockpile areas will be identified, with a minimal distance of 500m from any settlement. Preferably, storage areas should be in state-owned land. If private lands will be used, a negotiated rent on the property should be established with the land owner. All temporary asphalt pavement storage and processing areas shall be agreed upon with the regional departments of SAEPP under the Government of KR. Old asphalt should be trucked away in blocks and stockpiles should be no higher than 2.5 m.<br><br>Using old asphalt – The hacked asphalt old asphalt waste shall be transferred to Local RMU of MoTR tentatively. Then the old asphalt is used to strengthen the surface of existing second road in the villages. The top coating of the shoulders | Contractor                   | CSC/IPIG                |

| MITIGATION MEASURES DURING DESIGN, CONSTRUCTION AND OPERATION |          |                     |   |                              |         |
|---|----------|---------------------|---|------------------------------|---------|
| Area/<br>Component  | Activity | Potential<br>Impact | Mitigation measures   | Institutional Responsibility |         |
|   |          |                     |   | Implement                    | Monitor |
| CONSTRUCTION PHASE  |          |                     |   |                              |         |
|   |          |                     | with the addition of gravel-sand mixture with 15 cm thickness is recommended. |                              |         |

| MITIGATION MEASURES DURING DESIGN, CONSTRUCTION AND OPERATION |   |  |  |  |            |
|---|---|--|--|--|------------|
| Area/Component  | Activity  | Potential Impact   | Mitigation measures  | Institutional Responsibility           |            |
|   |   |  |  | Implement                              | Monitor    |
| OPERATION PHASE   |   |  |  |  |            |
| Air quality   | Increase of traffic volume                          | Air pollution  | Although no traffic air pollution is estimated until 2030, monitoring may be necessary if residents complain about air pollution.  | RMU-10 of MoTR                         | MoTR, SETI |
| Noise   | Increase of traffic volume                          | Noise nuisance   | Limit driving speed to 70km/h just around the settlements. To be enforced by traffic police.<br><br>Monitoring may be necessary if residents complain about traffic noise. Based on the monitoring results and consultation with residents, mitigation measure such as installation of noise barrier shall be studied.   | RMU-10 of MoTR                         | MoTR, SETI |
| Soil and surface water  | Increased traffic volumes and higher vehicle speeds | Increased risk of accidents with possible spills of harmful substances   | Spill-contingency plan, contingency plan or emergency response plan is a set of procedures to be followed to minimize the effects of an abnormal event on the Project roads, such as a spill of oil, fuel or other substances that may harm agricultural land and drinking/irrigation water resources or have adverse effects on the natural balance of sensitive areas.<br><br>Additional measures to mitigate risk of accidents and spill of harmful substances are speed control. | RMU-10 of MoTR                         | MoTR, SETI |
|   | Damaged drainage or uncontrolled erosion.           | Uncontrolled erosion.  | Routine monitoring of drainage and erosion control at least twice a year.  | RMU-10 of MoTR                         | MoTR, SETI |
| Flora/Trees   | Tree maintenance along the road                     | Loss of trees  | Maintenance of newly planted trees   | RMU-10 of MoTR                         | MoTR, SETI |
| Safety  | Increased traffic flow                              | Increased pedestrian vs. vehicle accidents due to increment of traffic volume and higher speed as a result of improved road design | Integrate in the engineering design safety features such as speed control signs, proper road markings, streetlights, pedestrian crossing, livestock crossing and other visual means.   | RMU-10 of MoTR, Traffic police service | MoTR       |
|   | Road crossing                                       | Traffic accident with Livestock  | Need to install the road sign indicating the places of transition of people and livestock. The crossing of people in the residential areas will be installed through every 200-250 m.  | RMU-10 of MoTR                         | MoTR, SETI |

277. Prior to construction works, the contractor shall provide a comprehensive general SSEMP covering the following aspects (as Appendixes):

- (i) Dust management which shall include schedule for spraying on hauling and access roads to construction site and details of the equipment to be used. The contractor shall pay a special attention to water spraying in settlements and at repair and construction sites.
- (ii) Construction noise suspension plan indicating locations of sensitive receptors, type, size and material of tentative noise barrier to be installed
- (iii) Layout of the work camp and details of the proposed measures to address adverse environmental impacts resulting from its installation
- (iv) Sewage management including provision of sanitary latrines and proper sewage collection and disposal system to prevent pollution of watercourses  
Waste management covering provision of garbage bins, regular collection and disposal in a hygienic manner, as well as proposed disposal sites for various types of wastes (e.g., domestic waste, used tires, etc.) consistent with appropriate regulations
- (v) Description and layout of equipment maintenance areas and lubricant and fuel storage facilities including distance from water sources and irrigation facilities. Storage facilities for fuels and chemicals will be located away from watercourses. Such facilities will be bounded and provided with impermeable lining to contain spillage and prevent soil and water contamination
- (vi) Soil Management Plan detailing measures to be undertaken to minimize effects of wind and water erosion on stockpiles of topsoil and excess materials, measures to minimize loss of fertility of top soil, timeframes, haul routes and disposal sites for excess materials.
- (vii) Borrow Pits Material and Source Management and Reinstatement Management Plans
- (viii) Method statement or plan for the execution of bridge construction works including measures that will be undertaken to address adverse environmental impacts such as erosion of river embankment and siltation of watercourses that may result from such activities
- (ix) Cultural and historical management plan
- (x) Emergency response plan (in case of spills, accidents, fires and the like) prior to operation of the asphalt plant

The SSEMP shall be submitted by the contractor for review of Construction Supervision Consultants (CSC) and ADB and, then, for the approval of IPIG.

## **2. Monitoring**

### **2.1. Monitoring plan**

278. Environmental monitoring is an important aspect of environmental management during construction and operation stages of the project to safeguard the protection of environment. During construction, environmental monitoring will ensure the protection of embankment from potential soil erosion; borrow pits restoration, quarry activities, location of work sites, material storages, asphalt plants, community relations, and safety provisions. During operation, air, noise, and surface water quality monitoring will be important parameter of the monitoring program. Environmental Monitoring Plan is shown in Table 22.

**Table 22: Environmental Monitoring Plan**

| Issue                                    | What parameter is to be monitored?                               | Where is the parameter to be monitored  | How is the parameter to be monitored?  | When is the parameter to be monitored? Frequency  | Institutional responsibility |
|--|--|---|--|---|------------------------------|
| <b>Construction stage</b>                |  |   |  |   |                              |
| Air Quality                              | Dust, SO <sub>2</sub> , NO <sub>2</sub>                          | At sensitive receptors within settlement.<br>(i) Kok – Zhar, near the Rakhat shop, LHS<br>(ii) Chekildek village, near the shop Ak Jol, RHS<br>(iii) Epkin village, near the mosque, LHS  | By means of suitable portable measurement device.  | Just before construction start. and every 2 monthly basis   | CSC                          |
|  | Check certificate of vehicles and equipment                      | At asphalt and crushing plants.   | Visual inspection  | Unannounced inspections during construction works   | CSC                          |
|  | Are the truck loads covered or wetted?;<br>Compliance with SSEMP | Material transport route in front of sensitive receptors  | Visual inspection<br>Supervision spot checks   | Unannounced inspections during work   | CSC                          |
| Noise/ vibration                         | Noise Level and Vibration Level                                  | At sensitive receptors within settlements<br><ul style="list-style-type: none"> <li>Kok-Zhar village, near the school on the road, LHS;</li> <li>Chekildek village, near the school LHS;</li> <li>Epkin village, near the mosque, LHS;</li> </ul> Cultural sites (cemeteries, vibration only) | By means of portable noise / vibration measurement device  | Second round of baseline monitoring measurements to be conducted before construction start. Than a monthly basis during construction stage.   | CSC                          |
| Water quality in surface waters (rivers) | Oil products, Turbidity, pH, DO, TSS, Ec and Temperature         | Upstream and downstream where the Project road crosses the main watercourse Zhon-Aryk (67+000) and other bridges points Mukan, Epkin, Zharkoomdu.   | Measurement either directly in river water with a suitable measurement device or sample taking and measurement in a certified laboratory | Second round of baseline monitoring measurements to be conducted before construction start. Than on a monthly basis during construction stage | CSC                          |
| Equipment servicing and fuelling         | Prevention of spilling of oil and fuel                           | Contractor's yard   | Inspections; observations  | Unannounced inspections during construction   | CSC control by IPIG of MoTR  |



| Issue  | What parameter is to be monitored?   | Where is the parameter to be monitored   | How is the parameter to be monitored?  | When is the parameter to be monitored? Frequency  | Institutional responsibility                      |
|--|--|--|--|---|---|
| <b>Construction stage</b>                          |  |  |  |   |   |
| Borrow areas                                       | Possession of official approval or valid operation license   | <ul style="list-style-type: none"> <li>Sand and gravel borrow pit and / or quarry</li> </ul>   | Inspection   | Before work begins  | CSC control by IPIG of MoTR                       |
| Top soil preservation                              | Stockpiling and means of protection  | Stock pile yardJob site  | Inspections's ; observation  | Once a month  | CSC control by IPIG of MoTR                       |
| Physical damage of the Cultural sites (cemeteries) | Cultural sites (cemeteries)  | <p>Cultural sites (cemeteries):</p> <ul style="list-style-type: none"> <li>68 km Cemetery on the (RHS) 2-3 m away from the road.</li> <li>70 km Cemetery (LHS) 2-3 m away from the road.</li> <li>83 km Cemetery (LHS) 50-70 m from the road.</li> </ul> | Visual observation   | <p>Visual observation before construction start and in construction period where the cemeteries are indicated (in the km).</p> <p>Document the condition of the cemeteries and mausoleums before constructions works.</p> | CSC   |
| Worker's safety and health                         | <p>Record of clinic with number of visitors/treatment done</p> <p>Official approval for worker's camp;</p> <p>Availability of appropriate personal protective equipment;</p> <p>Record of safety training to the staff</p> | Job site and worker's camp   | Inspection; interviews; comparisons with the Contractor's method statement   | <p>Weekly site visits by the hired Health and safety expert.</p> <p>Unannounced inspections during construction and upon complaint.</p>   | Contractor, CSC                                   |
| Worker's education on AIDS and STD                 | Has relevant education been provided?  | Record (minutes of seminar, attendance list) and photos of attendances of training, awareness campaign of prevention of HIV/AIDS   | To be determined by assigned Construction Supervision  | After beginning of works and at appropriate intervals throughout construction   | CSC, local health units of the Ministry of health |
| Asphalt plant                                      | Possession of official approval or valid operation license   | Asphalt plant  | Inspection   | Before work begins  | Construction Supervision (CS)                     |
| Potential tree losses                              | Status of trees. Thickness of fill at the root of trees  | At respective tree locations.  | <p>Inspections; observation.</p> <p>An embankment fill of up to 30 cm at the bottom of the tree stem area can be accepted. A filling up of more than 30 cm will damage the tree and cutting will be necessary.</p> | During construction phase.  | CSC control by IPIG of MoTR                       |

| Issue                                    | What parameter is to be monitored?                     | Where is the parameter to be monitored       | How is the parameter to be monitored? | When is the parameter to be monitored? Frequency | Institutional responsibility   |
|--|--|--|---------------------------------------|--|--|
| <b>Operational stage</b>                 |  |  |                                       |  |  |
| Traffic noise                            | Equivalent Noise Level                                 | Sensitive receptors                          | Handy type level meter                | Once a year and when requested                   | Local MoTR departments   |
| Traffic accident                         | Number of injury and death of animals                  | Along the new road                           | Interview to police                   | Once a Year                                      | Regional Departments of State Road Administration (UAD, LUAD, and GDAD BO)                                       |
|  | Accidents that cause spills of harmful substances      | Along the new road                           | Counting of accidents                 | Once a Year                                      | MoTR jointly with Road police service of the KR Ministry of home affairs and KR Ministry of emergency situations |
| Damaged drainage or uncontrolled erosion | Leakages in drainage system and damages due to erosion | Location of culverts and drainage facilities | Visual inspection                     | Once a Year                                      | Local MoTR departments   |
| Tree maintenance along the road          | Status of trees  | In locations of newly planted trees          | Visual inspection                     | Throughout the Year                              | Local MoTR departments joint with local authorities  |

## 2.2 Budget on Mitigation Measures

279. Most of the mitigation measures require the contractors to adopt good site practice, which should be part of their normal construction contract, so there will be no additional costs to be included in the EMP. Costs of design-related mitigation measures are included in the budgets for the civil works.
280. The primary impact that needs to be mitigated in the overall implementation of the project will be on the affected trees which were due to widening of the carriageway. These trees are mainly common trees such elm, poplar and black locust.
281. In order to have a higher degree of success for replacement of affected trees in the section, 2 saplings of the same or similar species is proposed to be planted. Accordingly, the estimated number of trees and cost for the affected trees to be substituted is shown in Table 23.

**Table 16: Number of Affected Trees and Cost for Mitigation activities.**

| # | Item                           | Unit       | QTY           | Remarks                                   |
|---|--------------------------------|------------|---------------|---|
| 1 | Affected trees due to widening | Each       | 38            | Indicated in field inspection for Cutting |
| 2 | For 1:2 Ratio of Replacement   | Each       | 76            | Estimated Trees to be Planted             |
| 3 | Average cost of Replacement    | Som        | 500           | Cost of Sapling & Planting                |
|   | <b>Total Cost</b>              | <b>Som</b> | <b>38,000</b> | Budgetary Estimate                        |
|   | 69 Som/ 1 USD                  | USD        | \$ 550.72     | Budgetary Estimate                        |

## 2.3 Budget on Monitoring Activities

282. The estimated cost for the environmental management and monitoring on the consultancy for the entire project construction period of two (2) years and one month. This will include fees and other associated cost for management and monitoring of the construction sites and affected areas in the project road. In addition, the main Contractor shall undertake periodic

parametric measurements as basis for action to improve their performance on the implementation of measures. Hence, a budget for periodic parametric measurements is hereby included in the Tables 24 and 25.

**Table 24: Budgetary Cost for Environmental Monitoring Specialists**

| Item   | Quantity                                | Unit Cost | Total Cost      |
|--|---|-----------|-----------------|
| <b>Implementation of EMP</b>                                   |   | US \$     | US \$           |
| International Environmental Specialist (IES)                   | 4 months / 2 years, 1 month* third year | 14,000    | 63,000          |
| National Environmental Specialist (NES)                        | 14 months/2 years, 1 month* third year  | 2,500     | 37,500          |
| Others (travel, per diem, surveys/interviews, reporting, etc.) | LS                                      | 20,000    | 20,000          |
| <b>Total</b>   |   |           | <b>120, 500</b> |

\* Period of construction work estimated 2 year and 1 year a technical survey (measurements 1 month a year) and physical engagement of Environmental Specialists can be only 7 month a year, without winter break period

**Table 25: Budgetary Cost for Environmental Monitoring Requirements**

| Item  | Quantity | Unit Cost | Total Cost    |
|---|----------|-----------|---------------|
| <b>Implementation of EMP</b>  |          | US \$     | US \$         |
| Periodic Parametric Measurements                                    | 78       |           | 10,400        |
| 6 month a year x 3* point (air) x 2 (years) 1** month               | 39       | 150***    | 4,350         |
| 6 month a year x 8* point (water) x 2 (years) 1** month             | 104      | 100***    | 10,400        |
| 6 month a year x 3* point (noise - vibration) x 2 (years) 1** month | 39       | 150***    | 4,350         |
| <b>Total</b>  |          |           | <b>29,500</b> |

\* - the number of points and measurements may vary

\*\* - 2 years a physical work and 1 year a technical survey (measurements 1 month a year)

\*\*\* - the cost of laboratory services may vary

**Note: This cost estimate is as of May 2016**

### 3. Mechanisms for implementation

#### 3.1 Institutional Framework

283. The relevant institutional entities for the project include the KR's Ministry of Finance (MOF), Ministry of Transport and Roads (the EA), Investment Projects Implementation Group (IPIG) under MoTR, the State Agency of Environment Protection and Forestry (SAEPF), the State Inspection on Ecological and Technical Safety under the Government of the Kyrgyz Republic (SIETS), the Department for Disease Prevention and State Sanitation and Epidemic Control of the Ministry of Health Protection of the Kyrgyz Republic.
284. MoTR is responsible for transport sector development and is the EA for the project. IPIG is working under MoTR and will carry out the responsibilities assigned to MoTR.
285. MOF is the responsible government body for coordination with ADB and other donors for foreign assistance.
286. SAEPF is a leading state environmental agency responsible for the environmental policy of the country and coordination of environmental activities of other state bodies. Its functions include:
  - Development of environmental policy and its implementation;
  - Carrying out a state environmental expertise;
  - Issuance of environmental licenses;
  - Environmental monitoring;
  - Delivery of environment information services.

287. SIETS carries out its activity in accordance with the Law "On Procedure for inspection of business entities". SIETS exercises control over compliance in established order of:
- environmental legislation, set rules, limits and standards of environmental management, standards for emissions and discharges of pollutants and waste disposal in the environment;
  - requirements of industrial safety in the construction, expansion, reconstruction, modernization, operation, conservation and liquidation of hazardous production facilities;
  - requirements of land legislation;
  - requirements for safe operation of equipment and facilities for storage and distribution of petrochemicals and gas, cranes;
  - requirements of safe use rules in the construction, assembling and commissioning of electrical networks and electrical equipment.
288. The Department for Disease Prevention and State Sanitation and Epidemic Center (DDPSSEC) of the Ministry of Health supervises sanitary and epidemiological welfare of the population, safety of goods and products, environmental compartments and conditions, prevention of harmful impacts of environmental factors on human health. DDPSSEC establishes MPC of chemicals in the environment with regard to the human health safety.
289. The following measures will be taken by the Consultant and by IPIG to perform environmental compliance with the EMP and Monitoring Plan during Project implementation:
- The tender and contract documents will clearly set out the contractor's obligations to undertake environmental mitigation measures set out in the Environmental Management Plan.
  - The recommended environmental mitigation costs are included as separate items in the Bills of Quantities. This will ensure that there is specific environmental mitigation budget which will be implemented as required. During the procurement, contractors will be encouraged to include these costs in their rates and present the mitigation cost as a line item in the Bill of Quantities. There will be an identified extra payment in the contract to ensure measures are coasted and carried out.
  - The contractor will recruit an environmental, health and safety manager, who will be responsible for implementing the contractors' environmental responsibilities. The manager will also be responsible for health and safety aspects of work sites. Before commencing physical construction, Contractor will prepare site-specific EMPs (SSEMPs), submit to Construction Supervision Consultant (CSC) and ADB for endorsement and IPIG for approval.
  - CSC will conduct environmental monitoring and assist IPIG in implementing EMP and supervising the implementation of mitigation measures by the contractors. Environment Monitoring Plan is shown on Table 20.

## **2.2. Reporting Requirements**

290. MoTR will monitor and measure the progress of implementation of the EMP. In this regard, semiannual monitoring reports during construction stage will be prepared by IPIG with assistance of Construction Supervision Consultant and then disclosed at ADB and MoTR websites. This report is owned by MOTR. Contractor submits to CSC monthly reports and reports on compliance with mitigation measures and other corrective actions. CSC submits to IPIG quarterly reports containing a section on safeguard performance.

## **J. Conclusions and Recommendations**

### **1. Conclusions**

291. The IEE/EMP-EMoP as part of the contract documents shall be adhered to by the Contractor. Accordingly, the Contractor shall require all his Sub-Contractors should follow also the EMP and such stipulations be shown in Sub-contracting agreements to be verified by the Engineer (or the CS Consultants).
292. The proposed Environmental Management and Monitoring Plans in this IEE will ensure that the good quality for surface water, air and noise in the general area is maintained, primarily during the construction phase. The focus of the assessment is to avoid (especially during design phase), reduce (during construction) and mitigate or compensate (also during construction) the impacts to physical and/or social environment. Adequate public consultations were done in introducing the project as well as presentation of environmental and community impacts and the stakeholder concerns were incorporated into the IEE. The IEE will be disclosed to the public and can be viewed on ADB websites.
293. With a proposed alignment to the hillside of the middle portion of the Bypass Road, the project is maintained at Environmental Category B, since the predicted impacts are “site-specific, few if any of them are irreversible, and in most cases mitigation measures can be readily designed (SPS 2009) and to be incorporated in the detailed designs.
294. As per the Kyrgyz Law, the proposed project will require permits from the government regulatory agencies: The Environmental Permit will be processed by the IPIG with the State Agency on Environment Protection and Forestry after the IEE is cleared with the ADB.

### **2. Findings and Recommendations**

295. The environmental impacts of the Project Road have been assessed and described in the previous sections of this document. Potential negative impacts were identified in relation to design, location, construction and operation of the improved road. Mitigation measures have been developed for finalization in the detailed design phase, for implementation in the construction phase and subsequently for the operations phase to reduce all negative impacts to acceptable levels.
296. As per assessment in this IEE, the proposed Road Project is unlikely to cause significant environmental impacts because:
- (i) The proposed project activities are focused on the improvement and reconstruction of the road restricting the works along the Right-of-Way with the main intent to improve the quality of life and quality of environment of the impacted districts;
  - (ii) The potential negative impacts associated with the design, construction and operation of the proposed Project activities will be temporary, and localized in extent and can be mitigated to acceptable levels;
  - (iii) Sources of materials can be adequately investigated at the project sites and the projected excess cut materials will be sufficient to cover for the fill requirements. The materials can be stockpiled and stabilized in nearby areas without posing environmental issue, however subject to permission by legitimate owners;
  - (iv) There will be no Project activities that will involve permanent or temporary loss of income and/or livelihood but rather redound to possible improvement of household earnings due to possible employment of local people in the construction;
  - (v) The institutional framework has been developed to specify the procedural requirements and responsibilities to ensure environmentally sustainable implementation, i.e. involving IPIG (Client), CSC and Contractor; and
  - (vi) All construction and operation activities will be monitored and reported by IPIG (by employing CSC) in accordance with the Environmental Monitoring Plan.





297. To ensure environmental and social safeguards, the IEE presents the following recommendations:
- (i) The EMP will be followed carefully and required reporting completed in a timely fashion.
  - (ii) The tree management and maintenance function should be passed to local communities or RMD, until trees have reached 8+ years and do not need careful maintenance.
  - (iii) CSC and IPIG will deliver the training to all active project participants and concentrate giving sound advice to the contractor, especially on the preparation and implementation of the CEWP.
  - (iv) Shortly after the operating period starts, the CSC and contractor will conduct a safeguards compliance check to be sure that all measures required of the contractor have been met.
  - (v) This IEE is “living” document and if required, it will be updated taking into account all environmental requirements, and any significant changes will be discussed and agreed to with ADB.
298. It is important that the Contractor and his Subcontractor that successful implementation entails not only provision of the infrastructure but also preservation of the environment within the framework of Sustainable Development.



## ANNEXES A: Outline Tables of Project

### Annex A1: Alignment Sheet

The result of the site visits by the international and local environmental specialists are summarized in an Alignment Sheet. This shows relevant environmental features which can be of concern during the implementation of the road. For the section “Kochkor (km 64) to Epkin (km 89)”, the Alignment Sheet is shown below.

#### Alignment Sheet Information

| No  | Section                                  | Description   | Parameter  | Comments  |
|---|--|---|--|---|
| <b>Section: Kochkor (64 km) – Epkin (km 89)</b> |  |   |  |   |
| 1.  | 66 km                                    | Six (6) trees may be cut down at RHS located 7.47 m from the center of the road.  |  | To be verified with the design  |
| 2.  | 66 km + 900                              | One (1) tree may be cut down at RHS located 7.7 m from the center of the road.  |  | To be verified with the design  |
| 3.  | 67 km, Kok-Djar village, Zhon-Aryk River | Highway bridge over Zhon-Aryk river will be repaired. This is a sampling point for water quality analysis.<br>  | Analysis of the quality of water in the oil, turbidity | Physical and chemical analysis.   |
|   |  | Kok-Zhar village has local health post, school, and local council – “Ayil Okmotu”. There is a cemetery along the road (68 km). There is a 10 thousand kW power line along the road and 500 thousand kW power line called Datka-Kemin.<br><br>Distance to the residential buildings is more than 20m from the edge of car lane. |  |   |
| 4.  | 67 km +700 – 67 km + 900                 | Center village: shop “Rakhat» (LHS), administration building (LHS), Park (RHS).<br><br>Distance to the residential buildings is more than 20m from the edge of car lane.<br>  | Air sampling, measurement of noise and vibration       | Physical analysis and instrumental measurements<br>Possible extra measures for social impacts/concern |
| 5.  | 68 km                                    | Cemetery on the (RHS) 2-3 m away from the road  |  | Special measures should be in place to  |

| No  | Section                     | Description   | Parameter  | Comments  |
|-----|-----------------------------|---|--|---|
|     |                             |   |  | protect structures  |
| 6.  | 68 km + 400                 | One (1) tree may be cut down at RHS and RHS located 6.5 m from the center of the road. Eagles were spotted in the area  |  | To be verified with the design                            |
| 7.  | 70 km, Chekildek village    | Chekildek village has a local health post, school that is not along the road.   |  | Possible extra measures for social impacts/ concerns      |
|     |                             | Adjacent to the road, a local the cemetery (LHS) was located. Distance from the center of the road to the border of the cemetery is 11.1 m; 2-3 m from the side of the road.<br> |  | Special measures should be in place to protect structures |
|     |                             | Existence of an old borrow pit. (LHS)   |  | Potential Material source to be verified                  |
| 8.  | 71km +600                   | Village Chekildek: Shop "Ak Jol".<br>   | Air sampling, measurement of noise and vibration | Physical analysis and instrumental measurements           |
|     | 71 km +700                  | One (1) tree may be cut down at RHS located 6.5 m from the center of the road; a row of tree may be cut down at LHS located 6.7 m from the center of the road. Distance to the residential buildings is more than 20m from the edge of car lane.                  |  | To be verified with the design                            |
| 9.  | 72 km +800                  | There are sand thorn bushes along the road to be cut down, farmlands on the sides (barley)  |  | Special measures to protect farms                         |
| 10. | 77 km+300                   | One (1) tree may be cut down at RHS located 6.7 m from the center of the road; one (1) tree may be cut down at LHS located 5.25 m from the center of the road.  |  | To be verified with the design                            |
|     |                             | The route crosses an irrigation ditch, from left to right. On either side of the road agricultural field.   |  | May require special measures                              |
| 11. | 81 km                       | There is an old borrow pit with sandy-gravel materials (LHS).   |  | Potential Material source to be verified                  |
|     |                             | There are poplars along the road.   |  | Protection of trees                                       |
| 12. | 81 km+500                   | One (1) tree may be cut down at LHS located 6.44 m from the center of the road.   |  | To be verified with the design                            |
|     |                             | The irrigation ditch on either side of the road agricultural field.   |  | Special measures to protect farms                         |
| 13. | 82 km +800, Cholpon village | Cholpon village is situated on right hand side, 1.5 kilometer away from the road.   |  | Village access should be maintained                       |



| No  | Section                          | Description   | Parameter | Comments   |
|-----|----------------------------------|---|-----------|--|
|     |                                  | One (1) tree may be cut down at RHS located 6.8 m from the center of the road.  |           | To be verified with the design                     |
| 14. | 83 km, Cholpon village, cemetery | Cafe (LHS), shop (RHS) located along the road. Along the road is a cemetery (LHS) at a distance of 50-70 meters from the road.  |           | Possible extra measures for social impacts/concern |
| 15. | 84 km + 400                      | One (1) tree may be cut down at LHS located 6.8 m from the center of the road.  |           | To be verified with the design                     |
|     | 84 km + 500                      | Three (3) trees may be cut down at RHS located 6.7 m from the center of the road.   |           |  |
|     | 84 km + 700                      | One (1) tree may be cut down at RHS located 6.7 m from the center of the road.  |           |  |
|     | 84 km + 800                      | One (1) tree may be cut down at RHS located 7.6 m from the center of the road.  |           |  |
| 16. | 85 km +500                       | An old borrow pit with sandy-gravel material (LHS) was found  |           | Potential Material source to be verified           |
| 17. | 86 km +500                       | Row of eight (8) trees may be cut down at RHS located 7.6 m from the center of the road   |           | To be verified with the design                     |
| 18. | 87 km + 300                      | Row of six (6) trees may be cut down at RHS located 7.1 m from the center of the road   |           | To be verified with the design                     |
|     | 87 km + 700                      | Row of eight (8) trees may be cut down at RHS located 6.6 m from the center of the road   |           | To be verified with the design                     |
| 19. | 89 km                            | Within the section (89 km) the significant archaeological resources consist of eight (8) objects presumably stone-earth mounds of early nomads made up of mainly of small size gravel with a height from 0.2 to 0.7 meters and a diameter of 4 to 11 meters. These artifacts are located about 80-100 meters south side of the road south-west of the village of Cholpon (or LHS from the road) in Kochkor district (coordinates 42.18314 E75.45456 of N) between arable agricultural lands (see Photos below). Due to its distance, it would not be directly affected by construction activities. Detected by archeological study. |           | Strict recommendation for workers.                 |

## Annex A2: Main Earth Work Proposed

| No. | Km from | Km to  | Type of earth work        | Side       | Length, m | Maximum width, m | Maximum height, m |
|-----|---------|--------|---------------------------|------------|-----------|------------------|-------------------|
| 1   | 62.500  | 65.200 | Fill                      | Full width | 2,700     | 30               | 3                 |
| 2   | 66.700  | 69.240 | Information not available |            |           |                  |                   |
| 3   | 69.260  | 69.300 | Fill                      | Full width | 40        | 20               | 3                 |
| 4   | 66.260  | 69.300 | Cut                       | LHS        | 40        | 10               | 3                 |
| 5   | 71.420  | 71.500 | Fill                      | Full width | 80        | 20               | 3                 |
| 6   | 71.780  | 71.500 | Cut                       | Both sides | 20        | 20               | 3                 |
| 7   | 81.100  | 81.160 | Fill                      | LHS        | 60        | 20               | 8                 |
| 8   | 88.700  | 89.040 | Fill                      | Full width | 340       | 30               | 5                 |

## Annex A3: Outline of Culverts in Section 2A

### On the main road

| №  | location                         | opening/<br>diam,<br>m             | kind of<br>waterway             | intersection<br>angle | length,<br>with<br>portal<br>walls, m | Gradient<br>of<br>culverts | direction<br>of<br>waterway | requirements for<br>repairing    |
|----|----------------------------------|------------------------------------|---------------------------------|-----------------------|---------------------------------------|----------------------------|-----------------------------|----------------------------------|
|    | km +                             |                                    |                                 |                       |                                       |                            |                             |                                  |
| 1  | 2                                | 3                                  | 4                               | 5                     | 6                                     | 7                          | 8                           | 9                                |
| 1a | 0+153<br>along the<br>roundabout | concrete box<br>culvert<br>0.5x0.5 | irrigator                       | 90°                   | 18.92                                 | 0.007                      | from right<br>to the left   | new culvert (on<br>the ring)     |
| 1  | 62+526                           | r.c. pipe d=1.5                    | irrigator                       | 90°                   | 29.15                                 | 0.005                      | from left<br>to the right   | replacing of<br>existing culvert |
| 2  | 62+751                           | r.c. pipe d=1.5                    | irrigator                       | 90°                   | 27.13                                 | 0.010                      | from left<br>to the right   | new culvert                      |
| 3  | 63+279                           | r.c. pipe d=1.0                    | bypass                          | 90°                   | 18.99                                 | 0.006                      | from right<br>to the left   | new culvert                      |
| 4  | 63+695                           | r.c. pipe d=1.0                    | irrigator                       | 86°                   | 17.98                                 | 0.006                      | from right<br>to the left   | replacing of<br>existing culvert |
| 5  | 64+333                           | r.c. pipe d=1.0                    | irrigator                       | 90°                   | 18.99                                 | 0.005                      | from left<br>to the right   | replacing of<br>existing culvert |
| 6  | 64+854                           | r.c. pipe d=1.0                    | irrigator                       | 90°                   | 17.98                                 | 0.005                      | from left<br>to the right   | replacing of<br>existing culvert |
| 7  | 64+955                           | r.c. pipe d=1.0                    | bypass                          | 75°                   | 18.99                                 | 0.015                      | from right<br>to the left   | replacing of<br>existing culvert |
| 8  | 65+514                           | r.c. pipe d=1.5                    | permanent<br>waterway           | 90°                   | 26.12                                 | 0.028                      | from left<br>to the right   | replacing of<br>existing culvert |
| 9  | 65+734                           | concrete box<br>culvert<br>0.5x0.5 | enclosure for<br>the water pipe | 90°                   | 25.37                                 | 0.005                      | from left<br>to the right   | new culvert                      |
| 10 | 65+856                           | r.c. pipe d=1.5                    | irrigator                       | 84°                   | 22.04                                 | 0.005                      | from left<br>to the right   | replacing of<br>existing culvert |
| 11 | 66+080                           | concrete box<br>culvert<br>0.5x0.5 | enclosure for<br>the water pipe | 90°                   | 24.36                                 | 0.005                      | from left<br>to the right   | new culvert                      |
| 12 | 66+144                           | r.c. pipe d=1.0                    | irrigator                       | 90°                   | 22.04                                 | 0.037                      | from left<br>to the right   | replacing of<br>existing culvert |
| 13 | 66+232                           | concrete box<br>culvert<br>1.0x1.0 | irrigator                       | 70°                   | 24.03                                 | 0.005                      | from left<br>to the right   | replacing of<br>existing culvert |
| 14 | 66+305                           | concrete box<br>culvert<br>0.5x0.5 | enclosure for<br>the water pipe | 90°                   | 26.38                                 | 0.005                      | from left<br>to the right   | new culvert                      |
| 15 | 66+582                           | r.c. pipe d=1.0                    | irrigator                       | 90°                   | 21.03                                 | 0.005                      | from left<br>to the right   | replacing of<br>existing culvert |
| 16 | 67+219                           | r.c. pipe d=1.0                    | permanent<br>waterway           | 90°                   | 17.98                                 | 0.007                      | from left<br>to the right   | replacing of<br>existing culvert |
| 17 | 67+768                           | r.c. pipe d=1.0                    | irrigator                       | 88°                   | 17.98                                 | 0.008                      | from left<br>to the right   | replacing of<br>existing culvert |
| 18 | 68+216                           | r.c. pipe d=1.0                    | irrigator                       | 90°                   | 17.98                                 | 0.014                      | from left<br>to the right   | replacing of<br>existing culvert |
| 19 | 69+032                           | r.c. pipe d=1.0                    | irrigator                       | 90°                   | 18.99                                 | 0.032                      | from left<br>to the right   | replacing of<br>existing culvert |
| 20 | 69+440                           | r.c. pipe d=1.0                    | irrigator                       | 90°                   | 20.00                                 | 0.005                      | from right<br>to the left   | new culvert                      |
| 21 | 70+857                           | r.c. pipe d=1.0                    | permanent<br>waterway           | 90°                   | 20.02                                 | 0.007                      | from right<br>to the left   | replacing of<br>existing culvert |
| 22 | 71+139                           | r.c. pipe d=1.0                    | irrigator                       | 90°                   | 18.99                                 | 0.011                      | from right<br>to the left   | replacing of<br>existing culvert |

| №  | location | opening/<br>diam,<br>m             | kind of<br>waterway | intersection<br>angle | length,<br>with portal<br>walls, m | Gradient<br>of culverts | direction of<br>waterway  | requirements<br>for repairing    |
|----|----------|------------------------------------|---------------------|-----------------------|------------------------------------|-------------------------|---------------------------|----------------------------------|
| 23 | 72+309   | r.c. pipe d=1.0                    | bypass              | 90°                   | 17.98                              | 0.012                   | from left<br>to the right | replacing of<br>existing culvert |
| 24 | 72+686   | r.c. pipe d=1.5                    | bypass              | 90°                   | 20.02                              | 0.068                   | from left<br>to the right | replacing of<br>existing culvert |
| 25 | 73+270   | r.c. pipe d=1.0                    | bypass              | 90°                   | 17.98                              | 0.019                   | from left<br>to the right | replacing of<br>existing culvert |
| 26 | 73+974   | r.c. pipe d=1.0                    | bypass              | 90°                   | 17.98                              | 0.032                   | from left<br>to the right | replacing of<br>existing culvert |
| 27 | 74+199   | r.c. pipe d=1.0                    | bypass              | 90°                   | 18.99                              | 0.041                   | from left<br>to the right | replacing of<br>existing culvert |
| 28 | 74+552   | r.c. pipe d=1.0                    | bypass              | 86°                   | 23.05                              | 0.005                   | from left<br>to the right | replacing of<br>existing culvert |
| 29 | 74+947   | concrete box<br>culvert<br>1.0x1.0 | bypass              | 90°                   | 19.66                              | 0.008                   | from left<br>to the right | replacing of<br>existing culvert |
| 30 | 75+179   | r.c. pipe d=1.0                    | bypass              | 89°                   | 18.99                              | 0.033                   | from left<br>to the right | replacing of<br>existing culvert |
| 31 | 75+259   | r.c. pipe d=1.0                    | bypass              | 90°                   | 17.98                              | 0.005                   | from left<br>to the right | replacing of<br>existing culvert |
| 32 | 75+658   | r.c. pipe d=1.0                    | bypass              | 90°                   | 18.99                              | 0.006                   | from left<br>to the right | replacing of<br>existing culvert |
| 33 | 77+760   | r.c. pipe d=1.0                    | irrigator           | 57°                   | 21.03                              | 0.008                   | from left<br>to the right | replacing of<br>existing culvert |
| 34 | 77+771   | r.c. pipe d=1.0                    | bypass              | 41°                   | 27.13                              | 0.005                   | from right<br>to the left | replacing of<br>existing culvert |
| 35 | 78+772   | r.c. pipe d=1.5                    | bypass              | 90°                   | 17.98                              | 0.005                   | from right<br>to the left | replacing of<br>existing culvert |
| 36 | 79+138   | r.c. pipe d=1.0                    | irrigator           | 90°                   | 18.99                              | 0.005                   | from right<br>to the left | replacing of<br>existing culvert |
| 37 | 80+144   | r.c. pipe d=1.0                    | irrigator           | 55°                   | 22.04                              | 0.005                   | from right<br>to the left | replacing of<br>existing culvert |
| 38 | 80+782   | r.c. pipe d=1.0                    | bypass              | 61°                   | 22.04                              | 0.011                   | from left<br>to the right | replacing of<br>existing culvert |
| 39 | 81+455   | r.c. pipe d=1.0                    | bypass              | 84°                   | 18.99                              | 0.005                   | from left<br>to the right | replacing of<br>existing culvert |
| 40 | 85+699   | r.c. pipe d=1.0                    | bypass              | 90°                   | 17.98                              | 0.010                   | from left<br>to the right | replacing of<br>existing culvert |
| 41 | 89+069   | r.c. pipe d=1.0                    | bypass              | 90°                   | 17.98                              | 0.005                   | from left<br>to the right | replacing of<br>existing culvert |

### On ramps

| 1 | 2      | 5                                  | 6         | 7   | 8     | 9     | 10                        | 11                               |
|---|--------|------------------------------------|-----------|-----|-------|-------|---------------------------|----------------------------------|
| 1 | 64+434 | concrete box<br>culvert<br>1.0x1.0 | irrigator | 90° | 12.55 | 0.005 | from left<br>to the right | new culvert                      |
| 2 | 65+173 | concrete box<br>culvert<br>1.0x1.0 | irrigator | 82° | 11.52 | 0.006 | from left<br>to the right | replacing                        |
| 3 | 75+666 | concrete box<br>culvert<br>1.0x1.0 | irrigator | 90° | 11.52 | 0.005 | from left<br>to the right | replacing of<br>existing culvert |

### On the sidewalk

| No.<br>п / п | location | opening/diam,<br>m. | kind of<br>waterway | Intersection<br>angle | length,<br>(with<br>headwalls)<br>, m | pitch of<br>culverts | requirements |
|--------------|----------|---------------------|---------------------|-----------------------|---------------------------------------|----------------------|--------------|
|              | km +     |                     |                     |                       |                                       |                      |              |
| 1            | 2        | 3                   | 4                   | 5                     | 6                                     | 7                    | 8            |

| on the left  |        |                                 |                              |     |      |       |                                  |
|--------------|--------|---------------------------------|------------------------------|-----|------|-------|----------------------------------|
| 1            | 65+840 | concrete box<br>culvert 1.0x1.0 | irrigator                    | 90° | 5.42 | 0.005 | replacing of<br>existing culvert |
| 2            | 65+873 | concrete box<br>culvert 0.5x0.5 | irrigator                    | 90° | 5.42 | 0.005 | replacing of<br>existing culvert |
| 3            | 66+227 | concrete box<br>culvert 1.0x1.0 | irrigator                    | 90° | 5.42 | 0.005 | new culvert                      |
| 4            | 70+857 | concrete box<br>culvert 1.0x1.0 | permanent<br>water<br>stream | 90° | 4.02 | 0.007 | new culvert                      |
| on the right |        |                                 |                              |     |      |       |                                  |
| 5            | 70+857 | concrete box<br>culvert 1.0x1.0 | permanent<br>water<br>stream | 90° | 4.02 | 0.007 | new culvert                      |

**Annex A4: Location of affected Power lines**

| No. | km              |          |
|-----|-----------------|----------|
| 1   | 65.400          | Overhead |
| 2   | 67.980          | Overhead |
| 3   | 68.040          | Overhead |
| 4   | 69.090          | Overhead |
| 5   | 69.120 - 69.180 | LHS      |
| 6   | 69.370          | Overhead |
| 7   | 69.920          | Overhead |
| 8   | 69.930          | Overhead |
| 9   | 70.150          | Overhead |
| 10  | 70.380          | Overhead |
| 11  | 70.770          | Overhead |
| 12  | 71200           | Overhead |
| 13  | 81340           | Overhead |
| 14  | 81.350          | Overhead |
| 15  | 81.390          | Overhead |
| 16  | 81.460          | Overhead |

## Annex B - List of Attendees in the Public Consultation in\_Kochkor

17 Mar. 2016

### Attendance Sheet

| No. | Full name          | Position                       | Place of residence / Telephone         | Signature |
|-----|--------------------|--------------------------------|--|-----------|
| 1   | Beishenaliev K. M. | Head DEP N-955                 | Kynyr village/ 0556004723              | /signed/  |
| 2   | Saburjanov J. S.   | Head of Kok-Jar v/a            | Kok-Jar village, Isagaly street        | /signed/  |
| 3   | Shukuraliev T. A.  | Kok-Jar village                | Kok-Jar village, A. Beisheev street    | /signed/  |
| 4   | Daiyrov E.         | GAP-Architecture               | Kochkor village, Isakeev street        | /signed/  |
| 5   | Abdykasumov M.     | Head architect                 | Kochkor village, Isakeev street 46     | /signed/  |
| 6   | Israilov R.        | Head of RUAF                   | Kochkor village, Komurchieva 12 street | /signed/  |
| 7   | Israilov J.S.      | Farm member                    | Kok-Jar village, Isagaly street        | /signed/  |
| 8   | Jusupov B.E.       | Farm member                    | Kok-Jar village, Altyn-Bulak street    | /signed/  |
| 9   | Samudin u. Azat    | Farm member                    | Kok-Jar village, Isagaly street        | /signed/  |
| 10  | Musaev K.K.        | Farm member                    | Kok-Jar village, Isagaly street        | /signed/  |
| 11  | Monkoev E.         | Semiz-Bel                      | Kara-Too village / 0555952868          | /signed/  |
| 12  | Sydykov A.         | Kok-Jar village                | Kok-Jar village, Chorgo street         | /signed/  |
| 13  | Jusupov SH.        | Kok-Jar village                | Kok-Jar village, Isagaly street        | /signed/  |
| 14  | Turdakulov B.      | Kok-Jar village                | Kok-Jar village, Altyn-Bulak street    | /signed/  |
| 15  | Asanova A.         |                                | Epkin village, Suiunduk village        | /signed/  |
| 16  | Akmatova K.        | Kok-Jar village                | Kok-Jar village, Isagaly street        | /signed/  |
| 17  | Karabaev K.        | Chekildek village              | Chekildek village, Taabaldiev street   | /signed/  |
| 18  | Sydygaliev S.      | Land specialist, Semiz-Bel v/a | Aret village                           | /signed/  |
| 19  | Kurmanbek U. T.    | Chekildek village              | Chekildek village, Toktokadyrov street | /signed/  |
| 20  | Bukarov K.B.       | Cholpon village authority      | Cholpon village                        | /signed/  |
| 21  | Isabaev Rysdalat   | Kochkor v/a, Tendik village    | Tendik village 0778 717806             | /signed/  |

Список присутствующих

| ФИО               | Должность     | Место проживания | Телефон       | Подпись |
|-------------------|---------------|------------------|---------------|---------|
| Абдулхамидов К.М. | Начальник     | с. Кочкор        | 0555-25-19-65 |         |
| Абдулхамидов М.С. | зам. н.ч.     | с. Кочкор        | 0555-25-19-65 |         |
| Абдулхамидов А.   | Нач. эк. к-та | с. Кочкор        | 0555-25-19-65 |         |
| Абдулхамидов Э.   | Нач. эк. к-та | с. Кочкор        | 0555-25-19-65 |         |
| Абдулхамидов М.   | Нач. эк. к-та | с. Кочкор        | 0555-25-19-65 |         |
| Абдулхамидов Р.   | Нач. эк. к-та | с. Кочкор        | 0555-25-19-65 |         |
| Абдулхамидов Н.С. | Нач. эк. к-та | с. Кочкор        | 0555-25-19-65 |         |
| Абдулхамидов Б.Э. | Нач. эк. к-та | с. Кочкор        | 0555-25-19-65 |         |
| Абдулхамидов Ч.Н. | Нач. эк. к-та | с. Кочкор        | 0555-25-19-65 |         |
| Абдулхамидов А.Н. | Нач. эк. к-та | с. Кочкор        | 0555-25-19-65 |         |
| Абдулхамидов Э.С. | Нач. эк. к-та | с. Кочкор        | 0555-25-19-65 |         |
| Абдулхамидов А.   | Нач. эк. к-та | с. Кочкор        | 0555-25-19-65 |         |
| Абдулхамидов В.Ш. | Нач. эк. к-та | с. Кочкор        | 0555-25-19-65 |         |
| Абдулхамидов Б.   | Нач. эк. к-та | с. Кочкор        | 0555-25-19-65 |         |
| Абдулхамидов А.   | Нач. эк. к-та | с. Кочкор        | 0555-25-19-65 |         |
| Абдулхамидов К.   | Нач. эк. к-та | с. Кочкор        | 0555-25-19-65 |         |
| Абдулхамидов С.   | Нач. эк. к-та | с. Кочкор        | 0555-25-19-65 |         |
| Абдулхамидов Ч.Н. | Нач. эк. к-та | с. Кочкор        | 0555-25-19-65 |         |
| Абдулхамидов К.Б. | Нач. эк. к-та | с. Кочкор        | 0555-25-19-65 |         |



## **Annex C – Written Comments, Recommendations and Questions**

Name: Israilov Rahatbek

Residential address: 12 Komurchiev Street, Kochkor village

Proposals concerning the road rehabilitation project:

Please compile a plan in advance on utilization of old asphalt

Please replace old trees with new plants

Questions related the road rehabilitation project:

Name: Karabaev Kanat

Residential address: Chekildek village, Semizbel village authority

Proposals concerning the road rehabilitation project:

Please make sure the Contractor lays a pipe for drinking water in the Kok-Cholok section of Chekildek village

Questions related the road rehabilitation project:

Will the Contractor arrange pedestrian crossing for children to cross the highway in Kok-Cholok rural community?

Name: Aigul Asanova

Residential address: Epkin village

Proposals concerning the road rehabilitation project:

We request you to provide for an underpass so the Epkin village's children could be able to cross the highway when they go to school.

Questions related the road rehabilitation project:

In what extent will the properties of Epkin village dwellers be destroyed or removed because of road construction?

Name: Bukarov Kanatbek

Residential address: 22 Tashy Street, Cholpon village

Proposals concerning the road rehabilitation project:

We request you to provide for an underpass so the Epkin village's children could be able to cross the highway when they go to school. In addition, about 90% of village dwellers cross the street on that place.

Questions related the road rehabilitation project:

Please make sure the Contractor lays a pipe for drinking water in Cholpon village, as water supply system will cross the highway to be rehabilitated

Name: Shukuraliev Torobai

Residential address: Kok-Zhar village authority

Proposals concerning the road rehabilitation project:

There is a ditch in the village used to water the farmland, which may cross the highway. Therefore, please make sure that you lay a pipe of appropriate diameter under the highway.

Please, arrange for road hump (sleeping policeman) on the highway to limit vehicles speed, so farm people would be able to cross the highway in safety

Questions related the road rehabilitation project:

If a part of property is in the highway area, will the Contractor pay a compensation for that?

Will our local people be hired by the Contractor?

Is it possible to move the channel located close to the road shoulder? If “yes”, will the standpipe be affected by that?

Name: Sabyrzhanov Zhyldyzbek

Residential address: 2 Isagaly Street, Kok-Zhar village

Proposals concerning the road rehabilitation project:

- 1) Install lighting
- 2) Install road parapets on the northern part of the road
- 3) Lay 3 sleeve pipes for drinking water
- 4) Repair the sidewalk
- 5) Repair bridges used for water transmission
- 6) Install road signs
- 7) Coat secondary roads with asphalt out of the old coating removed from the highway

Name: Eshimbek Monkoev

Residential address: Kara-Too village, Semiz-Bel village authority

Proposals concerning the road rehabilitation project:

Make sure that Contractor arranges pedestrian crossing for children in Kok-Cholok rural community of Chekildek village to cross the highway.

Arrange sidewalk.

Lay sleeve pipes for drinking water

Lay irrigation pipe in Chekildek village, on the place of the road close to the cemetery

Questions related the road rehabilitation project:

- 1) Will you build two bus-stops in Kok-Cholok village
- 2) Install electricity lighting
- 3) Prevent graves from being destroyed during the construction of the road
- 4) Will the Contractor hire local people

Name: Kubanychbek Beishenaliev

Residential address: Koshor village

Proposals concerning the road rehabilitation project:

Make sure that Contractor arranges sidewalks in Chekildek, Ak-Uchkun and Ak-Chiy villages and builds bus stops

Name: Aibek Sydykov

Residential address: 31 Chorgo Street, Kok-Zhar village

Proposals concerning the road rehabilitation project:

Access roads to houses

Name: Samudin uulu Azat

Residential address: 26 Isagaly Street, Kok-Zhar village

Proposals concerning the road rehabilitation project:

Please, lay old removed asphalt on secondary roads and repair 4 bridges.

Name: Koshatbek Musaev

Residential address: 11 Isagaly Street, Kok-Zhar village

Proposals concerning the road rehabilitation project:

Contractor should build access roads to villages, and repair bridges.

Questions related the road rehabilitation project:

Will the Contractor repair or build bridges over the ditches/channels used for water transmission?

Name: Bekboo Zhusupov

Residential address: 11 Isagaly Street, Kok-Zhar village

Proposals concerning the road rehabilitation project:

Sleeve pipes, and access roads

Name: Tynchtykbek Sabyrbekovich Israilov

Residential address: 31 Isagaly Street, Kok-Zhar village

Proposals concerning the road rehabilitation project:

Please install sleeve pipes for drinking water, and parapets, electric lighting and access roads towards the village. Build bridges over the ditches/channels.

Name: Bazarbek Turdakunov

Residential address: 36 Altyb-Bulak Street, Kok-Zhar village

Proposals concerning the road rehabilitation project:

Please install sleeve pipes on two places for drinking water and parapets in 400 m distance. Please install electric lighting and arrange for 1 km alley towards the village. Build bridges over the ditches/channels used for water transmission

Name: Shailoo Zhusupov

Residential address: Kok-Zhar village, Kochkor region

Proposals concerning the road rehabilitation project:

Please install electricity lighting, sleeve pipes on three places for drinking water. Lay pipes under the road so people would be able to use it for irrigation water transmission. Build sidewalks.

Questions related the road rehabilitation project:

My house is located close to the road. After rehabilitation of the road, there might be huge traffic, which might disturb me.

## **Annex D – Transcript of the video recording: in Kochkor District**

Mr. Ruslan, IPIG/MoTR:

Currently the feasibility study is being made. Therefore, prepare the list of irrigation pipes etc. to be laid under the road inside your village.

As for structures to be removed, we shall go through such matters next time when the principal groups come together with land specialist, representative of village authority and architect. Now we shall touch upon environmental issues, therefore if you have any environment related questions you may ask them during today's meeting.

Person wearing a dark hat:

You are conducting feasibility study right now. When will the road construction start? I am asking because people need to take their time to process arable lands.

Mr. Ruslan, IPIG/MoTR:

Approximately in a year. We shall inform about the start of road construction as early as possible. In no way, the Contractor shall trample your arable lands.

Make sure that you have specified in your requests the places where people often cross the street (schools, kindergartens), so the Contractor could provide for traffic lights etc.

Representative of Epkin village:

We have school in our village, which is located on the other side of the road. About 90% of dwellers live on the opposite side. Consequently, many children will have to cross the street. It would be good if you have arranged for an underpass.

Mr. Ruslan, IPIG/MoTR:

Please decide at first, which is better for you – traffic light or underpass; and then include it into your official request addressed to the MoTR. Nevertheless, be aware that it will be checked. Specialists will come and check how many people cross the street at that place and what time they do it most.

If you fail to specify the structures needed for your village in your written request, Contractor will consider your requests for a long time and will have less chance to solve your problem, because he will not have enough funds to do any work unspecified in the project. Therefore, specify in detail on what places irrigation pipes should be laid, traffic lights should be installed, embankments should be arranged against mudflows. Once again, I repeat make sure that you are applying in written, oral/verbal requests will not be considered.

As for structures/parts of structures that will possibly be removed, there is another group dealing with it, which is in Chaek village now. The group will study a structure to be removed in detail, measure it, identify its cost through independent estimator, submit the conclusion to the State Construction Department for examination, which will further be submitted to the Government by our office (MoTR). The Government will ratify/approve it, after which money will be allocated.

Currently we shall consider environment related matters. You may remember the case happened in Kochkor, when Contractor coated one secondary road using the asphalt removed from the highway being reconstructed. At that time, one environmental specialist claimed that the Contractor caused negative impact to environment by doing so and fined the Contractor. In response, dwellers of the village attacked that environmental specialist and requested him to leave the village forever. That was unpleasant case.

Therefore, in order to avoid repeating that incident, the Contractor will render every secondary help only under the permit of the environmental authority. Nevertheless, be aware that the Contractor will deliver old asphalt to the distance of 3 km at most.

Please, be aware that the road will not be commercial road.

As for the question whether local people will be hired, I would like to say that the Contractor would hire local people under a personal labor agreement. The MoTR or any other organization cannot instruct the Contractor to hire this or that person.

Percentage ratio in the Contract says that about 70% of local people will be hired for roadwork depending on the difficulty of the section and 30% of specialists will be foreign ones.

The road is currently undergoing feasibility study. The road is divided into 4 sections. The feasibility study shall identify the cost of each section. Those sections might be financed by different donors.

Every section might be covered by 4 different donors or one donor may take two sections. Now ADB is conducting feasibility study through the KOCKS Company. Soon Japanese Company shall come in the middle of April or at the beginning of May to prepare detailed project.

If everything goes smooth, the construction will begin next year.

If vegetation on the edge of the road is damaged, I assure you that it will recover in a year by itself. If it does not happen, then the Contractor shall plant grass seeds to recover natural look of any place.

No matter how many trees will be cut, they will be replaced by planting new ones; maybe much more than those that were cut. Moreover, I think it is better to plant small trees instead of poplar, which grow high and cause problems on the road (create shadow in winter enabling ice formation).

The Contractor will plant new trees while it is reconstructing the road and will water them. When the project is completed, trees will turn into green and high trees. In no way, the Contractor shall plant trees after completion of the project and run away without taking care of them.

Mr. Ruslan, IPIG/MoTR:

If irrigation channel is to be removed, then it will be identified during the feasibility study. Consequently, cost of channel removal from one place to another will be included in the project and Contractor shall take adequate measures.

As for walls to be removed, owners will receive compensation being equal to the cost of work related to removing of wall from one place to another. As for land, they will not be compensated, because many people illegally expanded their land plots.

Road embankment will be arranged according to the height of the road. The higher the road, the larger embankment will be. In addition, I would like to inform you that the Government adopted a Resolution, under which no land plot will be leased, sold or occupied by any structure within 32 m area away from the center of the road until the road has been completely reconstructed. If heads of village authorities fail to comply with that Resolution, they will personally bear the responsibility. Any construction that has been already started within specified area should be immediately stopped.

We will be keeping in touch with heads of village authorities to share any information with them.

Annex E – Results of laboratory analysis  
a) Air quality

КЫРГЫЗ РЕСПУБЛИКАСЫНЫН ӨКМӨТҮНӨ КАРАШТУУ КУРЧАП ТУРГАН ЧӨЙРӨНҮ КОРГОО  
ЖАНА ТОКОЙ ЧАРБАСЫ БОЮНЧА МАМЛЕКЕТТИК АГЕНТТИКТИН  
ЭКОЛОГИЯЛЫК МОНИТОРИНГ БАШКАРМАЛЫГЫ

УПРАВЛЕНИЕ ЭКОЛОГИЧЕСКОГО МОНИТОРИНГА  
ГОСУДАРСТВЕННОГО АГЕНТСТВА ОХРАНЫ ОКРУЖАЮЩЕЙ СРЕДЫ И ЛЕСНОГО  
ХОЗЯЙСТВА ПРИ ПРАВИТЕЛЬСТВЕ КЫРГЫЗСКОЙ РЕСПУБЛИКИ

720005, г. Бишкек, ул. Байтик-Баатыра, 34

тел. (996-312) 54-07-65, факс: 54-07-66

## ПРОТОКОЛ АНАЛИЗА ПРОБ АТМОСФЕРНОГО ВОЗДУХА

№ 220-235

1. **Наименование предприятия, организации (заявитель):**

Иссык-Кульская, Нарынская, Чуйская области  
Автодорога «Балыкчы – Кочкор – Жумгал – Суусамыр»

2. **Место отбора проб:**

|   |   |
|---|---|
| <u>220-Кольцевая с.Балыкчы(нач.уч.)</u> | <u>228-с.Дыйкан(школа)</u>              |
| <u>221-с.Таш-Сарай (жил.дом)</u>        | <u>229-с.Байзак(маг.Адилет)</u>         |
| <u>222-с.Кок-Жар(маг.Рахат)</u>         | <u>230-с.Чаяк (дом ветеранов)</u>       |
| <u>223-с.Чекилдек (маг.Ак-Жол)</u>      | <u>231-с.Кызыл-Жылдыз(спорт.компл.)</u> |
| <u>224-с.Ак-Учук (мечеть)</u>           | <u>232-с.Кызыл-Ой (школа)</u>           |
| <u>225-с.Жумгал (школа)</u>             | <u>233-с.Коржомкул (школа)</u>          |
| <u>226-с.Күйрүчук(маг.Азамат)</u>       | <u>234-с.Суусамыр(мил.пункт)</u>        |
| <u>227-с.Туголеай (маг.Кутман)</u>      | <u>235-с.Тунук (школа)</u>              |

3. **Цель отбора проб:** Определение концентрации загрязняющих веществ  
в атмосферном воздухе

4. **Кем отобраны пробы:** гл. спец. Райкеевой Р.Н., спец. Жаманакоевой А.Н.

5. **Дата и время отбора проб:** 30.11.- 02.12.2015г., с 10ч.00мин.-17ч.00мин.

6. **Характер отобранных проб:** разовый

7. **Метод анализа:** 1. Руководство по контролю загрязнения атмосферы  
РД 52.04.186-89

8. **Даты проведения испытаний:** 04.12.- 10.12.2015г.

стр. 1 из 1

КЫРГЫЗ РЕСПУБЛИКАСЫНЫН ӨКМӨТҮНӨ КАРАШТУУ КУРЧАП ТУРГАН ЧӨЙРӨНҮ  
КОРГОО ЖАНА ТОКОЙ ЧАРБАСЫ БОЮНЧА МАМЛЕКЕТТИК АГЕНТТИКТИН  
ЭКОЛОГИЯЛЫК МОНИТОРИНГ БАШКАРМАЛЫГЫ

УПРАВЛЕНИЕ ЭКОЛОГИЧЕСКОГО МОНИТОРИНГА  
ГОСУДАРСТВЕННОГО АГЕНТСТВА ОХРАНЫ ОКРУЖАЮЩЕЙ СРЕДЫ И ЛЕСНОГО  
ХОЗЯЙСТВА ПРИ ПРАВИТЕЛЬСТВЕ КЫРГЫЗСКОЙ РЕСПУБЛИКИ

720005, г. Бишкек, ул. Байтик Баатыра, 34

тел. (996-312) 54-07-65, факс: 54-07-66

ПАСПОРТ НА ПРОБУ

1. Наименование, адрес объекта: Славя. Кривская, Нарынская  
Кубанская области  
автостроитель. багнатын - котмор - туркмен -  
сурсамак
2. Место отбора проб: 1. Казычева с. Багнатын, 2. с. Тим-Сарай  
(напр. жем. догров), 3. с. Кок-Тар (напр. Ракат), 4. с. Кокорет  
(напр. А. В. В. В. В.), 5. с. А. - Чук (напр.), 6. с. Кукуча (напр.),  
7. с. Кукуча (напр. В. В. В.), 8. с. Кукуча (напр. Кукуча),  
9. с. Кукуча (напр.) 10. с. Кукуча (напр. Кукуча), 11. с. Кукуча (напр.)  
12. с. Кукуча (напр. Кукуча), 13. с. Кукуча (напр. Кукуча), 14. с. Кукуча  
(напр. Кукуча), 15. с. Кукуча (напр. Кукуча), 16. с. Кукуча (напр. Кукуча)
3. Цель отбора: Определение концентрации загрязнителей в атмосфере воздуха
4. Характер отобранных проб: розовый
5. Условия окружающей среды: ясно, солнечно
6. Условия отбора проб:
7. Дата отбора проб: 30.11.2015 г. с 10:00 - 14:00
8. Метод отбора проб: 1. РД 52.04.186-89 "Руководство по контролю загрязнения атмосферы".  
2. ГОСТ Р 50820-95 Оборудование газоочистное и пылеулавливающее. Методы определения  
запыленности газопылевых потоков.

Представитель УЭМ

(должность, фамилия)

Госинспектор

(должность, фамилия)

Представитель предприятия

(должность, фамилия)

Иванов  
Иванов

Иванов  
Иванов

Иванов Р.Н.  
Иванов Р.Н.

Иванов Р.

1 стр из 1

| Наимен-е<br>ингреди-в | Ед.<br>изм.       | Данные анализа по точкам |                               |                 |                               |                 |                               |                 |                               |                 |                               |                 |                               |                      |
|-----------------------|-------------------|--------------------------|-------------------------------|-----------------|-------------------------------|-----------------|-------------------------------|-----------------|-------------------------------|-----------------|-------------------------------|-----------------|-------------------------------|----------------------|
|                       |                   | 220                      | Прев.<br>ПДК<br>макс.<br>раз. | 221             | Прев.<br>ПДК<br>макс.<br>раз. | 222             | Прев.<br>ПДК<br>макс.<br>раз. | 223             | Прев.<br>ПДК<br>макс.<br>раз. | 224             | Прев.<br>ПДК<br>макс.<br>раз. | 225             | Прев.<br>ПДК<br>макс.<br>раз. | ПДК<br>макс.<br>раз. |
| Диоксид<br>серы       | мг/м <sup>3</sup> | 0,05±<br>0,006           | -                             | <0,03           | -                             | <0,03           | -                             | <0,03           | -                             | <0,03           | -                             | <0,03           | -                             | 0,5                  |
| Диоксид<br>азота      | мг/м <sup>3</sup> | 0,022±<br>0,004          | -                             | 0,027±<br>0,003 | -                             | <0,02           | -                             | 0,023±<br>0,004 | -                             | 0,017±<br>0,003 | -                             | 0,018±<br>0,003 | -                             | 0,085                |
| Взв. вещ-ва<br>(пыль) | мг/м <sup>3</sup> | 0,29±<br>0,07            | -                             | <0,28           | -                             | <0,26           | -                             | 0,28±<br>0,07   | -                             | 0,28±<br>0,07   | -                             | <0,26           | -                             | 0,5                  |
| Наимен-е<br>ингреди-в | Ед.<br>изм.       | 226                      | Прев.<br>ПДК<br>макс.<br>раз. | 227             | Прев.<br>ПДК<br>макс.<br>раз. | 228             | Прев.<br>ПДК<br>макс.<br>раз. | 229             | Прев.<br>ПДК<br>макс.<br>раз. | 230             | Прев.<br>ПДК<br>макс.<br>раз. | 231             | Прев.<br>ПДК<br>макс.<br>раз. | ПДК<br>макс.<br>раз. |
| Диоксид<br>серы       | мг/м <sup>3</sup> | <0,03                    | -                             | <0,03           | -                             | <0,03           | -                             | 0,05±<br>0,006  | -                             | <0,03           | -                             | <0,03           | -                             | 0,5                  |
| Диоксид<br>азота      | мг/м <sup>3</sup> | <0,02                    | -                             | 0,017±<br>0,003 | -                             | 0,029±<br>0,003 | -                             | 0,023±<br>0,003 | -                             | 0,015±<br>0,003 | -                             | 0,011±<br>0,002 | -                             | 0,085                |
| Взв. вещ-ва<br>(пыль) | мг/м <sup>3</sup> | 0,28±<br>0,07            | -                             | 0,28±<br>0,07   | -                             | <0,26           | -                             | 0,28±<br>0,07   | -                             | 0,28±<br>0,07   | -                             | <0,26           | -                             | 0,5                  |

стр.26 из 3

| Наимен-е<br>ингреди-в | Ед.<br>изм.       | Данные анализа по точкам |                               |                 |                               |                 |                               |                 |                               |  |                      |
|-----------------------|-------------------|--------------------------|-------------------------------|-----------------|-------------------------------|-----------------|-------------------------------|-----------------|-------------------------------|--|----------------------|
|                       |                   | 232                      | Прев.<br>ПДК<br>макс.<br>раз. | 233             | Прев.<br>ПДК<br>макс.<br>раз. | 234             | Прев.<br>ПДК<br>макс.<br>раз. | 235             | Прев.<br>ПДК<br>макс.<br>раз. |  | ПДК<br>макс.<br>раз. |
| Диоксид<br>серы       | мг/м <sup>3</sup> | 0,03±<br>0,004           | -                             | 0,043±<br>0,003 | -                             | 0,04±<br>0,003  | -                             | 0,037±<br>0,007 | -                             |  | 0,5                  |
| Диоксид<br>азота      | мг/м <sup>3</sup> | 0,021±<br>0,004          | -                             | 0,027±<br>0,003 | -                             | 0,031±<br>0,006 | -                             | 0,035±<br>0,006 | -                             |  | 0,085                |
| Взвеш-ва<br>(пыль)    | мг/м <sup>3</sup> | <0,26                    | -                             | 0,28±<br>0,07   | -                             | <0,26           | -                             | <0,26           | -                             |  | 0,5                  |

Главный специалист



Т. Садыхбеков

Исходитель, не несет ответственности, если проба отобрана самим заказчиком.  
Перечислена проплата без разрешения испытательной лаборатории аккредитации.  
Протокол испытаний касается только образцов, предоставленных испытателем.

стр.26 из 3



КЫРГЫЗ РЕСПУБЛИКАСЫНЫН ӨКМӨТҮНӨ КАРАШТУУ  
КУРЧАП ТУРГАН ЧӨЙРӨНҮ КОРГОО ЖАНА ТОКОЙ ЧАРБАСЫ БОЮНЧА МАМЛЕКЕТТИК  
АГЕНТТИКТИН ЭКОЛОГИЯЛЫК МОНИТОРИНГ БАШКАРМАЛЫГЫ

УПРАВЛЕНИЕ ЭКОЛОГИЧЕСКОГО МОНИТОРИНГА  
ГОСУДАРСТВЕННОГО АГЕНТСТВА ОХРАНЫ ОКРУЖАЮЩЕЙ СРЕДЫ И  
ЛЕСНОГО ХОЗЯЙСТВА ПРИ ПРАВИТЕЛЬСТВЕ КЫРГЫЗСКОЙ РЕСПУБЛИКИ

720005, г. Бишкек, ул. Байтик-Баатыра, 34

тел. (996-312) 54-07-65, факс: 54-07-66

05/178 от 03.12.2015г

Директору  
KOCKS CONSULT GMBH  
Карстен Гризе

Управление экологического мониторинга ГАООС и ЛХ при ПКР  
не может выдать результаты по окиси углерода (СО) в атмосферном  
воздухе по причине непригодности газоанализатора ПГА-200.

Справка о непригодности прибора ПГА-200 прилагается на 1 л.

Начальник



Б.Маматаиров

b) Water quality

КЫРГЫЗ РЕСПУБЛИКАСЫНЫН ӨКМӨТҮНӨ КАРАШТУУ  
КУРЧАП ТУРГАН ЧӨЙРӨНҮ КОРҒОО ЖАНА ТОКОЙ ЧАРБАСЫ БОЮНЧА  
МАМЛЕКЕТТИК АГЕНТТИКТИН ЭКОЛОГИЯЛЫК МОНИТОРИНГ БАШКАРМАЛЫГЫ

УПРАВЛЕНИЕ ЭКОЛОГИЧЕСКОГО МОНИТОРИНГА  
ГОСУДАРСТВЕННОГО АГЕНТСТВА ОХРАНЫ ОКРУЖАЮЩЕЙ СРЕДЫ И  
ЛЕСНОГО ХОЗЯЙСТВА ПРИ ПРАВИТЕЛЬСТВЕ КЫРГЫЗСКОЙ РЕСПУБЛИКИ

720005, г. Бишкек, ул. Байгус-Баятыра, 34

тел. (996-312) 54-07-65, факс: 54-07-66

Аттестат аккредитации  
№ KG 417/КЦА.ИД.049

от 05.04.2013 г.

\*-метод не аккредитован

ПРОТОКОЛ  
АНАЛИЗА ПРОБ ВОДЫ

№ 513-519

1. Наименование предприятия, организации (заявитель):

Иссык-кульская, Нарынская, Чуйская обл., автодорога Балыкчи-Кочкор-Жумгал-Сүлөмүр.

2. Место отбора проб:

513-р. Чу, с. Таш-Сарай (мост)

514-р. Чу, гидропост

515-р. Джосон-Арык, с. Кок-Жар (мост)

516-р. Жумгал, с. Чаек (мост)

517-р. Кокомерен, с. Арал (мост)

518-р. Кокомерен, с. Кызыл-Ой (мост)

519-р. Карякол, с. Кожомкул (мост)

3. Цель отбора проб: Определение прозрачности, нефтепродуктов

4. Кем отобраны пробы: Спец. УЭМ Жаманакковой, Райсеевой

5. Дата и время отбора проб: 30.11-02.12.2015 г., 10.00-17.00

■ Дата(ы) проведения испытаний: 02.12.2015 г.



| Наименование<br>погрешностей | Ед.<br>изм. | Данные анализа по точкам |       |       |       |       |       |       | ПДК  |     | ПД                          |
|------------------------------|-------------|--------------------------|-------|-------|-------|-------|-------|-------|------|-----|-----------------------------|
|                              |             | 513                      | 514   | 515   | 516   | 517   | 518   | 519   | +    | ++  |                             |
| Прозрачность*                | См.         | 41                       | 37    | 43    | 36    | 40    | 37    | 32    |      |     | СЭВ ч.1<br>М. 1977          |
| Нефтепродукты                | мг/л        | <0,05                    | <0,05 | <0,05 | <0,05 | <0,05 | <0,05 | <0,05 | 0,05 | 0,3 | ПВД Ф<br>14.12.4 12<br>8-98 |

Главный специалист



С.В.Янова

\*Перечень рыбохозяйственных нормативов ПДК и ОБУВ вредных веществ, для воды водных объектов, имеющих рыбохозяйственное значение, Контроль качества поверхностных вод, Государственный комитет России по рыболовству, Москва 1999 г.

†- ГН 2.1.5.1315-03, ПДК химических веществ в воде водных объектов хозяйственного и культурно-бытового назначения, Минздрав России, Москва, 2003 г.

Исполнитель не несет ответственности, если проба отобрана самим заказчиком.  
Передача протокола без разрешения испытательной лаборатории запрещена.  
Протокол испытаний касается только образца, представленного на испытание.

## c) Noise

Аттестат аккредитации Кыргызского центра аккредитации  
№KG 41/КПА .ИЛ.097 от 06.10.2010г.

Группа по контролю физических факторов Департамента госсанэпиднадзора  
Министерства здравоохранения Кыргызской Республики

### ПРОТОКОЛ ИЗМЕРЕНИЙ ШУМА № 81 от « 03 » декабря 2015 г.

Юридическое лицо, индивидуальный предприниматель или физическое лицо, где  
производятся измерения КОКС проект АБР TA 48401-002

(наименование и юридический адрес)

Объект, где производятся измерения. Альтернативный автодорога Север-Юг  
(наименование, фактический адрес)

Балычты-Кочкор-Чаек-Суусамыр 4-й суусамыр

Наименование средств измерений и сведения о государственной поверке

| Наименование средства<br>измерений | Номер    | Свидетельство о поверке |              | Поверено до  |
|------------------------------------|----------|-------------------------|--------------|--------------|
|                                    |          | номер                   | дата         |              |
| Октава 101А                        | № 04А445 | №592                    | 16.03.2015г. | 16.03.2016г. |

1. Нормативная документация, в соответствии с которой проводились измерения

СН 2.2.4/2.1.8.562-96 «Шум на рабочих местах, в помещениях жилых, общественных  
зданий и на территории жилой застройки»

Источники физических факторов и их характеристики:  
автомобиль

Общее количество страниц 3 страница 1

Результаты измерений:

| №  | Место измерений       | Характер шума |        |          |            |             |            | Уровни звукового давления, в дБ в октавных полосах со среднечастотными частотами в Гц |    |     |     |     |      |      |      |      |      |      | Уровни звука в дБА |  |
|----|-----------------------|---------------|--------|----------|------------|-------------|------------|---|----|-----|-----|-----|------|------|------|------|------|------|--------------------|--|
|    |                       | По спектру    |        |          | По времени |             |            | 31,5  | 63 | 125 | 250 | 500 | 1000 | 2000 | 4000 | 8000 |      |      |                    |  |
|    |                       | Широкая       | Тонкая | Полосный | Колба      | Прерывистый | Постоянный |   |    |     |     |     |      |      |      |      |      |      |                    |  |
| 1  | 2                     | 3             | 4      | 5        | 6          | 7           | 8          | 9   | 10 | 11  | 12  | 13  | 14   | 15   | 16   | 17   | 20   |      |                    |  |
| 1  | Г. Балмышы            | +             |        |          |            | +           |            |   |    |     |     |     |      |      |      |      | 43,1 | Факт |                    |  |
|    |                       |               |        |          |            |             |            |   |    |     |     |     |      |      |      |      | 70   | НД   |                    |  |
|    |                       |               |        |          |            |             |            |   |    |     |     |     |      |      |      |      |      | прев |                    |  |
| 2  | С. Таш-Сарай          | +             |        |          |            | +           |            |   |    |     |     |     |      |      |      |      | 40,2 | Факт |                    |  |
|    |                       |               |        |          |            |             |            |   |    |     |     |     |      |      |      |      | 70   | НД   |                    |  |
|    |                       |               |        |          |            |             |            |   |    |     |     |     |      |      |      |      |      | прев |                    |  |
| 3  | С.Кок-Жар             | +             |        |          |            | +           |            |   |    |     |     |     |      |      |      |      | 57   | Факт |                    |  |
|    |                       |               |        |          |            |             |            |   |    |     |     |     |      |      |      |      | 70   | НД   |                    |  |
|    |                       |               |        |          |            |             |            |   |    |     |     |     |      |      |      |      |      | прев |                    |  |
| 4  | С.Чекилдек            | +             |        |          |            | +           |            |   |    |     |     |     |      |      |      |      | 68,1 | Факт |                    |  |
|    |                       |               |        |          |            |             |            |   |    |     |     |     |      |      |      |      | 70   | НД   |                    |  |
|    |                       |               |        |          |            |             |            |   |    |     |     |     |      |      |      |      |      | прев |                    |  |
| 5  | С.Ак-Учук             | +             |        |          |            | +           |            |   |    |     |     |     |      |      |      |      | 67,3 | Факт |                    |  |
|    |                       |               |        |          |            |             |            |   |    |     |     |     |      |      |      |      | 70   | НД   |                    |  |
|    |                       |               |        |          |            |             |            |   |    |     |     |     |      |      |      |      |      | прев |                    |  |
| 6  | С.Жумгал              | +             |        |          |            | +           |            |   |    |     |     |     |      |      |      |      | 69   | Факт |                    |  |
|    |                       |               |        |          |            |             |            |   |    |     |     |     |      |      |      |      | 70   | НД   |                    |  |
|    |                       |               |        |          |            |             |            |   |    |     |     |     |      |      |      |      |      | прев |                    |  |
| 7  | С.Куйручук            | +             |        |          |            | +           |            |   |    |     |     |     |      |      |      |      | 58   | Факт |                    |  |
|    |                       |               |        |          |            |             |            |   |    |     |     |     |      |      |      |      | 70   | НД   |                    |  |
|    |                       |               |        |          |            |             |            |   |    |     |     |     |      |      |      |      |      | прев |                    |  |
| 8  | С.Туголсай            | +             |        |          |            | +           |            |   |    |     |     |     |      |      |      |      | 55   | Факт |                    |  |
|    |                       |               |        |          |            |             |            |   |    |     |     |     |      |      |      |      | 70   | НД   |                    |  |
|    |                       |               |        |          |            |             |            |   |    |     |     |     |      |      |      |      |      | прев |                    |  |
| 9  | С.Дыйкан              | +             |        |          |            | +           |            |   |    |     |     |     |      |      |      |      | 42,7 | Факт |                    |  |
|    |                       |               |        |          |            |             |            |   |    |     |     |     |      |      |      |      | 70   | НД   |                    |  |
|    |                       |               |        |          |            |             |            |   |    |     |     |     |      |      |      |      |      | прев |                    |  |
| 10 | С.Байтак              | +             |        |          |            | +           |            |   |    |     |     |     |      |      |      |      | 63,2 | Факт |                    |  |
|    |                       |               |        |          |            |             |            |   |    |     |     |     |      |      |      |      | 70   | НД   |                    |  |
|    |                       |               |        |          |            |             |            |   |    |     |     |     |      |      |      |      |      | прев |                    |  |
| 11 | С.Чаек.               | +             |        |          |            | +           |            |   |    |     |     |     |      |      |      |      | 53   | Факт |                    |  |
|    |                       |               |        |          |            |             |            |   |    |     |     |     |      |      |      |      | 70   | НД   |                    |  |
|    |                       |               |        |          |            |             |            |   |    |     |     |     |      |      |      |      |      | прев |                    |  |
| 12 | Конец с. Кызыл Жылдыз | +             |        |          |            | +           |            |   |    |     |     |     |      |      |      |      | 55   | Факт |                    |  |
|    |                       |               |        |          |            |             |            |   |    |     |     |     |      |      |      |      | 70   | НД   |                    |  |
|    |                       |               |        |          |            |             |            |   |    |     |     |     |      |      |      |      |      | прев |                    |  |
| 13 | с.Кызыл-Ой            | +             |        |          |            | +           |            |   |    |     |     |     |      |      |      |      | 52   | Факт |                    |  |
|    |                       |               |        |          |            |             |            |   |    |     |     |     |      |      |      |      | 70   | НД   |                    |  |
|    |                       |               |        |          |            |             |            |   |    |     |     |     |      |      |      |      |      | прев |                    |  |

общее количество страниц 3 : страница 2

# Результаты измерений:

| №  | Места измерений | Характер шума |        |            |       |             |            | Уровни звукового давления в дБ в октавных полосах со среднечастотными частотами в Гц |    |     |     |     |      |      |      |      |    | Уров.<br>звуко-<br>а<br>(дБ<br>А) |      |  |  |
|----|-----------------|---------------|--------|------------|-------|-------------|------------|--|----|-----|-----|-----|------|------|------|------|----|-----------------------------------|------|--|--|
|    |                 | По спектру    |        | По времени |       |             |            |  |    |     |     |     |      |      |      |      |    |                                   |      |  |  |
|    |                 | Широкий       | Тонкий | всплеск    | Класс | прерывистый | постоянный | 31,5   | 63 | 125 | 250 | 500 | 1000 | 2000 | 4000 | 8000 |    |                                   |      |  |  |
| 1  | 2               | 3             | 4      | 5          | 6     | 7           | 8          | 9  | 10 | 11  | 12  | 13  | 14   | 15   | 16   | 17   | 18 | 19                                | 20   |  |  |
| 14 | С.Кожомкул      | +             |        |            |       | +           |            |  |    |     |     |     |      |      |      |      |    | 42                                | Факт |  |  |
|    |                 |               |        |            |       |             |            |  |    |     |     |     |      |      |      |      |    | 70                                | НДП  |  |  |
| 15 | С.Суусамыр      | +             |        |            |       | +           |            |  |    |     |     |     |      |      |      |      |    | 35                                | Факт |  |  |
|    |                 |               |        |            |       |             |            |  |    |     |     |     |      |      |      |      |    | 70                                | НДП  |  |  |
| 16 | С.Тунук         | +             |        |            |       | +           |            |  |    |     |     |     |      |      |      |      |    | 34                                | Факт |  |  |
|    |                 |               |        |            |       |             |            |  |    |     |     |     |      |      |      |      |    | 70                                | НДП  |  |  |
|    |                 | +             |        |            |       | +           |            |  |    |     |     |     |      |      |      |      |    |                                   | Факт |  |  |
|    |                 |               |        |            |       |             |            |  |    |     |     |     |      |      |      |      |    |                                   | Факт |  |  |
|    |                 | +             |        |            |       | +           |            |  |    |     |     |     |      |      |      |      |    |                                   | Факт |  |  |
|    |                 |               |        |            |       |             |            |  |    |     |     |     |      |      |      |      |    |                                   | Факт |  |  |
|    |                 | +             |        |            |       | +           |            |  |    |     |     |     |      |      |      |      |    |                                   | Факт |  |  |
|    |                 |               |        |            |       |             |            |  |    |     |     |     |      |      |      |      |    |                                   | Факт |  |  |
|    |                 | +             |        |            |       | +           |            |  |    |     |     |     |      |      |      |      |    |                                   | Факт |  |  |
|    |                 |               |        |            |       |             |            |  |    |     |     |     |      |      |      |      |    |                                   | Факт |  |  |

Уполномоченный представитель объекта, присутствующий при проведении измерений:  
фамилия, имя, отчество, должность Асаналиева Н. Эколог проекта  
подпись [подпись]

| Измерения проводил(и)     | Должность       | ФИО            | Подпись          |
|---------------------------|-----------------|----------------|------------------|
| Руководитель лаборатории: | Санитарный врач | Арзыкулов Ж.Т. | <u>[подпись]</u> |

Протокол составляется в двух экземплярах, 1-й экземпляр выдается по месту требования, 2-й экземпляр остается в лаборатории.

**Заключение По результатам измерений уровень шума вдоль дороги не превышает предельно-допустимого не обнаружены.**

Основание: СН 2.2.4/2.1.8.562-96 «Шум на рабочих местах, в помещениях жилых, общественных зданий и на территории жилой застройки»

Санитарный врач [подпись] Арзыкулов Ж.Т.

общее количество страниц 3 страница 3

#### d) Vibration

Аттестат аккредитации Кыргызского центра аккредитации  
№КГ 41/КЦА .Н.1.897 от 06.10.2010г.

Группа по контролю физических факторов Департамента госсанитарного  
Министерства здравоохранения Кыргызской Республики

#### ПРОТОКОЛ ИЗМЕРЕНИЕ ВИБРАЦИИ

№ 82 от «03» декабря 2015 г.

Юридическое лицо, индивидуальный предприниматель или физическое лицо, где  
проводятся измерения: **КОСКС проект АБР ТА 48401-002**

(наименование и юридический адрес)

Объект, где проводятся измерения: **Альтернативный автодорога Север-Юг**

(наименование, фактический адрес)

**Балыкчы-Кочкор-Чаек-Суусамыр ч-э суусамыр**

Наименование средств измерений и сведений о государственной поверке:

| Наименование средства<br>измерения | Номер    | Свидетельство о поверке |              | Поверено до  |
|------------------------------------|----------|-------------------------|--------------|--------------|
|                                    |          | номер                   | дата         |              |
| Октава 101в                        | № 04А445 | № ВА-06-05 7551         | 02.12.2014г. | 02.12.2015г. |

1. Нормативная документация, в соответствии с которой проводились измерения  
**СН 2.2.4/2.1.8.556-96 "Производственная вибрация, вибрация в помещениях жилых  
и общественных зданий"**

Источники физических факторов и их характеристики:

**Грузовые автотранспортные средства и производственные оборудования завода**



Результаты измерений:

| Результаты измерений: |                       |               |       |            |         |           |           |   |    |     |     |     |     |      |      |    |      |                    |
|-----------------------|-----------------------|---------------|-------|------------|---------|-----------|-----------|---|----|-----|-----|-----|-----|------|------|----|------|--------------------|
| №                     | Место измерений       | Характер шума |       |            |         |           |           | Уровни звукового давления в дБ в октавных полосах со среднегеометрическими частотами в Гц |    |     |     |     |     |      |      |    |      | Уровень шума (дБА) |
|                       |                       | По спектру    |       | По времени |         |           |           | 9   | 10 | 1,0 | 2,0 | 4,0 | 8,0 | 16,0 | 31,5 | 63 |      |                    |
|                       |                       | Широким       | Узким | Полосным   | Колесом | прерывист | непрерывн |   |    |     |     |     |     |      |      |    |      |                    |
| 1                     | 2                     | 3             | 4     | 5          | 6       | 7         | 8         | 9   | 10 | 11  | 12  | 13  | 14  | 15   | 16   | 17 | 18   | 19                 |
| 1                     | Г. Балыкчы            |               |       |            |         |           |           |   |    |     |     |     |     |      |      |    | 92,4 | Факт               |
|                       |                       |               |       |            |         |           |           |   |    |     |     |     |     |      |      |    | 108  | ПДУ                |
| 2                     | С. Тап-Сарай          |               |       |            |         |           |           |   |    |     |     |     |     |      |      |    | -    | прев               |
|                       |                       |               |       |            |         |           |           |   |    |     |     |     |     |      |      |    | 91,7 | Факт               |
| 3                     | С.Кок-Жар             |               |       |            |         |           |           |   |    |     |     |     |     |      |      |    | 108  | ПДУ                |
|                       |                       |               |       |            |         |           |           |   |    |     |     |     |     |      |      |    | -    | прев               |
| 4                     | С.Чекилдек            |               |       |            |         |           |           |   |    |     |     |     |     |      |      |    | 91,1 | Факт               |
|                       |                       |               |       |            |         |           |           |   |    |     |     |     |     |      |      |    | 108  | ПДУ                |
| 5                     | С.Ак-Учук             |               |       |            |         |           |           |   |    |     |     |     |     |      |      |    | -    | прев               |
|                       |                       |               |       |            |         |           |           |   |    |     |     |     |     |      |      |    | 91,2 | Факт               |
| 6                     | С.Жумгал              |               |       |            |         |           |           |   |    |     |     |     |     |      |      |    | 108  | ПДУ                |
|                       |                       |               |       |            |         |           |           |   |    |     |     |     |     |      |      |    | -    | прев               |
| 7                     | С.Куйручук            |               |       |            |         |           |           |   |    |     |     |     |     |      |      |    | 92   | Факт               |
|                       |                       |               |       |            |         |           |           |   |    |     |     |     |     |      |      |    | 108  | ПДУ                |
| 8                     | С.Тутолсай            |               |       |            |         |           |           |   |    |     |     |     |     |      |      |    | -    | прев               |
|                       |                       |               |       |            |         |           |           |   |    |     |     |     |     |      |      |    | 91   | Факт               |
| 9                     | С.Дыйкан              |               |       |            |         |           |           |   |    |     |     |     |     |      |      |    | 108  | ПДУ                |
|                       |                       |               |       |            |         |           |           |   |    |     |     |     |     |      |      |    | -    | прев               |
| 10                    | С.Байзак              |               |       |            |         |           |           |   |    |     |     |     |     |      |      |    | 92,3 | Факт               |
|                       |                       |               |       |            |         |           |           |   |    |     |     |     |     |      |      |    | 108  | ПДУ                |
| 11                    | С.Чаек                |               |       |            |         |           |           |   |    |     |     |     |     |      |      |    | -    | прев               |
|                       |                       |               |       |            |         |           |           |   |    |     |     |     |     |      |      |    | 95   | Факт               |
| 12                    | Конец с. Кызыл Жылдыз |               |       |            |         |           |           |   |    |     |     |     |     |      |      |    | 108  | ПДУ                |
|                       |                       |               |       |            |         |           |           |   |    |     |     |     |     |      |      |    | -    | прев               |
| 13                    | с.Кызыл-Ой            |               |       |            |         |           |           |   |    |     |     |     |     |      |      |    | 88   | Факт               |
|                       |                       |               |       |            |         |           |           |   |    |     |     |     |     |      |      |    | 108  | ПДУ                |
| 14                    | С.Кожомкул            |               |       |            |         |           |           |   |    |     |     |     |     |      |      |    | -    | прев               |
|                       |                       |               |       |            |         |           |           |   |    |     |     |     |     |      |      |    | 90   | Факт               |
|                       |                       |               |       |            |         |           |           |   |    |     |     |     |     |      |      |    | 108  | ПДУ                |
|                       |                       |               |       |            |         |           |           |   |    |     |     |     |     |      |      |    | -    | прев               |
|                       |                       |               |       |            |         |           |           |   |    |     |     |     |     |      |      |    | 86   | Факт               |
|                       |                       |               |       |            |         |           |           |   |    |     |     |     |     |      |      |    | 108  | ПДУ                |
|                       |                       |               |       |            |         |           |           |   |    |     |     |     |     |      |      |    | -    | прев               |

бшее количество страниц 3 : страница 2



**КЫРГЫЗ РЕСПУБЛИКАСЫНЫН  
МАДАНИЙЕТ, МААЛЫМАТ ЖАНА  
ТУРИЗМ МИНИСТРЛИГИ**



**МИНИСТЕРСТВО КУЛЬТУРЫ,  
ИНФОРМАЦИИ И ТУРИЗМА  
КЫРГЫЗСКОЙ РЕСПУБЛИКИ**

720001, Кыргыз Республикасы  
Баткен обл. Пушкин көч. 78  
ААК/СК - Баткен, кырым, баткен облусу  
Э/соеби № 1250522381810048  
и/соеби 202201121  
ННН 0080720041007610010 25540644  
төл-496 (312) 62-04-82, факс 62-35-89  
www.mincult.gov.kg  
www.kyrgyzstan.gov.kg

720040, Кыргызская Республика  
г. Баткен, ул. Пушкина, 78  
Баткенский филиал ГАО РК  
регистрационный № 1290522381810048  
и/с 202201121  
ННН 0080720041007610010 25540644  
төл-496 (312) 62-04-82, факс 62-35-89  
www.mincult.gov.kg  
www.kyrgyzstan.gov.kg

№ 24 / 24 / 2016 г.  
Исходный (исх.) № 24 / 1965  
Исходящий (исх.) №

**Компания  
KOCKS Consult GMBH**

Koblenz  
Stegemannstr. 32/38  
телефон: +49 261 1302-0

Министерство рассмотрев отчет «Археологического обследования на территории соединительных дорог – Альтернативная дорога Север-Юг, коридоры ЦАРЭС 1 и 3, общей протяженности 260 км на территориях Тонского района Иссык-Кульской области, Кочкорского и Жумгалского районов Нарынской области, Жайылского района Чуйской области Кыргызской Республики» выполненный Чаргыновым Т. – доцентом Кыргызского национального университета имени Ж. Бабасалгына, согласно Открытого листа формы № 3 и заключения комиссии от 25 апреля 2016 года образованного приказом Министерства культуры, информации и туризма Кыргызской Республики № 164 от 21 апреля 2016 года, сообщает следующее.

Заказчику согласно законодательства Кыргызской Республики в сфере историко-культурного наследия необходимо провести археологические раскопки и документирование «на месте» с привлечением специалистов-археологов на нижеследующих недвижимых объектах историко-культурного наследия, расположенных в зоне проектируемого строительства автодороги:

- могильник Куйручук 1 (N41°58'41.0" E074°51'56.0") (79-ый км. по обе стороны автодороги от Кочкор к Чаеку);
- могильник Кырчан 1 (N41°52'24.2" E074°19'45.3") (3,5 км. от поворота на право, мост через реку Кокмерен);

- могильник Кырчан 2 (N41°52'59.4" E074°19'20.3") (в 6-ти км. от поворота на право, мост через реку Кокомерен);

- могильник между селами Кырчан и Кызыл-Ой (N41°54'46.8" E074°15'15.5") (в 14-ти км. от поворота на право, мост через реку Кокомерен).

Также Заказчику обеспечить сохранность нижеследующих недвижимых объектов историко-культурного наследия с изменением маршрута проектируемого строительства автодороги в радиусе не менее 50 метров от могильника и организацией работ по разработке их охранных зон и представить на согласование. При не возможности исполнения вышеуказанных требований необходимо провести археологические раскопки и документирование «на снос» с привлечением специалистов-археологов, расположенных в зоне проектируемого строительства автодороги:

- объекты каменно-земляной насыпью (N42.18314 E75.45456) (27-ой км. автодороги от Кочкора к Чаеку);

- могильник (N42°06'21.9" E075°12'00.5") (44-ый км. автодороги от Кочкора к Чаеку (перевал Кытарт));

- могильник Кытарт (N42°05'39.7" E 075°08'13.4") (50-ый км. автодороги от Кочкора к Чаеку);

- могильник Куйручук (N41.98436 E74.79124) (86-ом км. автодороги от Кочкора к Чаеку);

- могильник (N41°51'39.5" E074°20'00.4") (в 2-х км. от поворота на право, мост через реку Кокомерен).

Заказчику разработать проект дороги в обход на тех территориях, где расположены и попадают под риск разрушения нижеследующие недвижимые объекты историко-культурного наследия (оседлого населения средневековья и этнографические погребально-поминальные сооружения) с привлечением представителей органов местного самоуправления и специалистов-археологов:

- Сары-Булунский караван-сарай (N42.400664 E76.099044) (8-ой км. от г. Баймак по направлению Кочкор);

- комплекс мавзолеев (N41.97764 E74.91014) (73-ий км. автодороги от Кочкора к Чаеку);

- комплекс мавзолеев (N41.99129 E74.64144) (100-м км. автодороги от Кочкора к Чаеку между селами Баймак и Дыйхан);

- **Кумбоз Кожомкул** у въезда в село Кожомкул со стороны села Кызыл-Ой.

Кроме того, Заказчику организовать повторное археологическое обследование на наличие или отсутствие объектов историко-культурного наследия на отрезке автодороги от села Кожомкул до автодороги Бишкек-Ош.

В связи с вышеизложенным с учетом выполнения вышеуказанных мероприятий будет рассмотрен вопрос проектируемого строительства «Соединительных дорог – Альтернативная дорога Север-Юг, коридора


ЦАРЭС 1 и 3, общей протяженности 260 км на территориях Тонского района Иссык-Кульской области, Конкорского и Жумгалевского районов Нарынской области, Жайылского района Чуйской области Кыргызской Республики».

Статс-секретарь.



Б. Секимов

Annex G: Information letter from MoTR

|   |   |   |
|---|---|---|
| <b>КЫРГЫЗ РЕСПУБЛИКАСЫНЫН<br/>ТРАНСПОРТ ЖАНА ЖОЛДОР<br/>МИНИСТРЛИГИ</b>   |  | <b>МИНИСТЕРСТВО ТРАНСПОРТА<br/>И ДОРОГ<br/>КЫРГЫЗСКОЙ РЕСПУБЛИКИ</b>  |
| 720017, Бишкек ш., Исанов коч., 42<br>тел. +996 (312) 31-43-85, 31-43-13,<br>факс: +996 (312) 31-28-11<br>E-mail: mtk@mtk.gov.kg<br>http://www.mtk.kg |   | 720017, г. Бишкек, ул. Исанова, 42<br>тел. +996 (312) 31-43-85, 31-43-13,<br>факс: +996 (312) 31-28-11<br>E-mail: mtk@mtk.gov.kg<br>http://www.mtk.kg |

---

|                    |                         |              |
|--------------------|-------------------------|--------------|
| № <u>14-8/5879</u> | « <u>20</u> » <u>02</u> | 2016-ж. (г.) |
| На № _____         |                         |              |

КР Өкмөтүнүн Чүй облусундагы ыйгарым укуктуу өкүлчүлүгү

КР Өкмөтүнүн Нарын облусундагы ыйгарым укуктуу өкүлчүлүгү

КР Өкмөтүнүн Ысык-Көл облусундагы ыйгарым укуктуу өкүлчүлүгү

Жайыл районунун мамлекеттик райондук администрациясы

Кочкор районунун мамлекеттик райондук администрациясы

Жумгал районунун мамлекеттик райондук администрациясы

Балыкчы ш. мэриясы

Бишкек – Ош автожолун Бишкек-Нарын-Торугарт автожолу (Балыкчы ш. – Кочкор а. – Арал а. – Суусамыр а.) менен коридор аралык бириктирүүчү жолду реабилитациялоо долбооруна карата Техникалык-экономикалык негиздемени даярдоо үчүн Азия Өнүктүрүү Банкы тарабынан бөлүнгөн техникалык жардамды ишке ашыруунун алкагында, бул иштер үчүн Азия Өнүктүрүү Банкы тарабынан «KOCKS» консультациялык компаниясы тандалган.

Сунушталып жаткан долбоор Кыргыз Республикасынын региондорунун төмөндөгү социалдык-экономикалык көрсөткүчтөрүн жакшыртат:

- Туштук региондордон Нарын жана Ысык-Көл облустарына адамдардын жана товарлардын жылуусунда жолго кеткен убакыттын кыскарышы;
- каттамды кыскартууга жана жакшы жол шарттарына байланыштуу транспорт чыгымдарын азайтуу;
- жергиликтүү жана эде аралык ташууларды жана кыймылдарды көбөйтүү;
- жергиликтүү жашоочулар үчүн коңумчу киреше алып келүүчү мүмкүнчүлүктөрдүн пайда болушу.
- жаңы жумушчу орундарын түзүү;



- транспорт каражаттарынын (ТК) оң абалы/ пайдалануу чыгымдарын кыскартуу.

Техникалык-экономикалык негиздемени даярдоонун алкагында «КОСКС» консультациялык компаниясынын адистери тарабынан КР ТЖКМ Инвестициялык долбоорлорду ишке ашыруу тобунун өкүлдөрү менен биргеликте “Курчап турган чөйрөгө таасирлерин баалоо отчетун” жана “Көчүрүү жана жерлерди алуу планын” даярдоо боюнча иштер аяктады.

Бул документтер менчик ээлеринин укуктарын коргоого, курчап турган чөйрөнү коргоого багытталган КР ченемдик-укуктук актыларына ылайык жана АӨБ Коргоо чаралары боюнча саясатынын талаптарын эске алуу менен даярдалды.

Азыркы убакта Техникалык-экономикалык негиздемени даярдоо боюнча иштер аяктап калды жана пландалган долбоордун таасирин тийиши мүмкүн, реабилитациялануучу автожол участогунун жээгинде жашаган, жергиликтүү калктын арасында пландалган долбоорго байланыштуу маалыматты жайылтууга тиешелүү Азия Өнүктүрүү Банкынын талабын аткаруу керек.

Жогоруда берилгендердин негизинде, КР “КР мамлекеттик органдарынын жана жергиликтүү өз алдынча башкаруу органдарынын жүргүзүүсүндө турган маалыматтарга жетүү мүмкүндүгү жөнүндө” мыйзамынын талаптарын аткаруу, ошондой эле Азия Өнүктүрүү Банкынын Коргоо чаралары боюнча саясатынын талаптарын сактоо максатында, Сиздерден долбоордун мүмкүн болуучу таасири жөнүндө маалымдуулукту жогорулатуу максатында жергиликтүү калк арасында түшүндүрүү иштерин жүргүзүүнү өтүнөбүз. Бишкек – Ош автожолун Бишкек-Нарын-Торугарт автожолу менен коридор аралык бириктирүүчү жолду реабилитациялоо долбоору төмөндөгү калктуу пункттарды камтыйт:

Чүй облусунун Жайыл району:

- Кызыл-Ой а., Кожомкул а., Суусамыр а., Тунук а., Суусамыр айыл аймагы.

Нарын облусунун Кочкор району:

- Көк-Жар а., Көк-Жар айыл аймагы;  
- Чекилдек а., Семиз-Бел айыл аймагы;  
- Эпкин/Ак-Учук а., Чолпон айыл аймагы.

Нарын облусунун Жумгал району:

- Жумгал а., Жумгал айыл аймагы;  
- Куйручук а., Куйручук айыл аймагы;  
- Түгөл-Сай а., Түгөл-Сай айыл аймагы;  
- Баш-Кууганды а., Кырчын а., Баш-Кууганды айыл аймагы;  
- Байзак а., Байзак айыл аймагы;  
- Часк а., Часк айыл аймагы;  
- Кызыл-Жылдыз а., Кызыл-Жылдыз айыл аймагы.

Балыкчы ш., Ысык-Көл облусу:

Тиркеме: Долбоор жана долбоордун мүмкүн болуучу таасири жөнүндө маалымат  
- 5 баракта.

Урматтоо менен,

Министр



З. Айдаров

Аткар. Абдыгулов А. Тел. 31-43-56

Долбоор жана долбоордун мүмкүн болуучу таасири жөнүндө маалымат  
(экологиялык жана социалдык маселелер).

**Балыкчы ш., Таш-Сарай жана Орто-Токой айылдары.**

**Кочкор району:**


1. Көк-Жар а/а – Көк-Жар айылы
2. Семиз-Бел а/а – Чекилдек айылы
3. Чолпон а/а – Эпкин/Ак-Учук айылы

**Жумгал району:**

1. Жумгал а/а – Жумгал айылы
2. Куйручук а/а – Куйручук айылы
3. Түгөл-Сай а/а – Түгөл-Сай айылы
4. Баш-Кууганды а/а – Баш-Кууганды, Кырчын айылдары
5. Байзак а/а – Байзак айылы
6. Чаек а/а – Чаек, Ак-Татыр айылы
7. Кызыл-Жылдыз а/а – Кызыл-Жылдыз айылы

**Жайыл району:**

Суусамыр а/а – Кызыл-Ой, Кожомкул, Суусамыр, Тунук айылдары

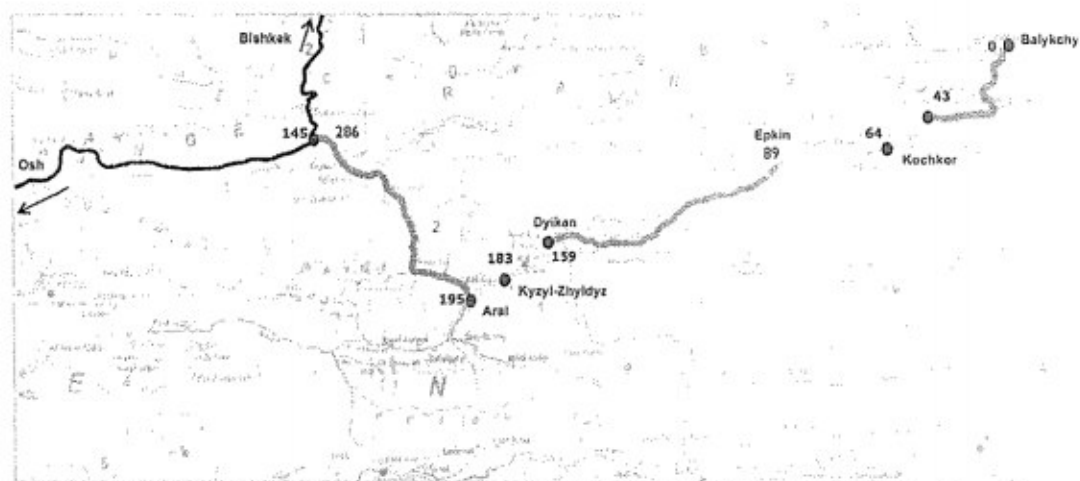

Кыргыз Республикасынын Өкмөтү Азия өнүктүрүү банкына (АӨБ) БАРЭК алкагында 1 жана 3-коридорлорду бириктирүүчү жолду жакшыртуу боюнча долбоорго кийинки кредитти жана/же грантты аныктоо, иштеп чыгуу жана даярдоо өтүнүчү менен кайрылган. ТППП негизги жыйынтыгы донорлордун каржылоосу үчүн ылайыктуу техникалык-экономикалык негиздемени даярдоо болуп саналат.

ТППП 5 участка каттыт:

- Балыкчыдан (км) 43 километр белгисине чейин (км 0 - км 43), болжол менен 43 километр (км);
- Кочкордон Эпкин айылына чейин (км 64 – км 89), болжол менен 25 км;
- Эпкинен (89 км) Баш-Куугандыга чейин [мурдагы Дыйкан] (159 км), болжол менен 70 км;



- Дыйкан айылынан тартып (159 км) Кызыл-Жылдыз айылына чейин (183 км), болжол менен 24 км, мында Чаек айылын жана Кызыл-Жылдыз айылынын бир бөлүгүн айланып өтүү үчүн айланма жолду куруу каралууда; жана
- Аралдан тартып (195 км) Төө-Ашуу ашуусуна чейин (286 км), болжол менен 91 км.

Долбоордун алкагында корголбогон компоненттердин тармактык көйгөйлөрү дагы чечилет. Өкмөт менен айрым деталдарда макулдашууга жетинүү талап кылынат, аларга төмөндөгүлөр кирет: (i) Кыргыз Республикасында жол активдерин башкаруунун натыйжалуулугун жогорулатуу, (ii) өкмөттү транспорт секторундагы институттук реформалар менен колдоо, (iii) натыйжалуулукка негизделген тейлөөгө контракттарды жүргүзүү жана (iv) Кыргыз Республикасында жол коопсуздугун жогорулатуу.

Транспорт жана коммуникация министрлигине (ТЖКМ) караштуу Инвестициялык долбоорлорду ишке ашыруу тобу (ИДИТ) курулуш баскычында ушул долбоор боюнча Аткаруучу орган (АО) катары чыгат. Мүмкүн болуучу финансылык жардамдын баштапкы бөлүгү катары, АӨБ бүтүндөй долбоор үчүн техникалык-экономикалык негиздемени жана болжолдуу долбоорду даярдоо үчүн «Кокс Консульт Гмбх», Германия, жалдады. Консультациялык кызмат көрсөтүүлөрдүн көлөмү баштапкы экологиялык изилдөөнү (БЭИ); жана социалдык талдоону жана жакырчылыкты талдоону жана 2009-жылдагы АӨБ Кепилдиктер саясаты жөнүндө билдирүүгө (КСБ) ылайык кесепеттерин баалоону камтыйт.

Сунушталып жаткан долбоор Кыргыз Республикасынын региондорунун төмөндөгү социалдык-экономикалык көрсөткүчтөрүн жакшыртат:

- Түштүк региондордон Нарын жана Ысык-Көл облустарына адамдардын жана товарлардын жылуусунда жолго кеткен убакыттын кыскарышы.
- Каттамды кыскартууга жана жакшы жол шарттарына байланыштуу транспорт чыгымдарын азайтуу.
- Жергиликтүү жана эле аралык ташууларды жана кыймылдарды көбөйтүү.
- Жергиликтүү жашоочулар үчүн кошумча киреше алып келүүчү мүмкүнчүлүктөрдүн пайда болушу.
- Жаңы жумушчу орундарын түзүү.
- Транспорт каражаттарынын (ТК) оң абалы/ Пайдалануу чыгымдарын кыскартуу.

Кыргыз Республикасынын мыйзамдарына ылайык курчап турган чөйрөгө таасирине баалоо жүргүзүү керек. ТЭН баскычында курчап турган чөйрөгө таасирин баалоону изилдөө Техникалык-экономикалык негиздемеге (ТЭН) карата Курчап турган чөйрөгө таасирин алдын ала баалоо (КЧТАБ) катары каралат жана КЧТБ отчету менен таргизделет.

АӨБ Коргоо Саясаты боюнча Жобосунун жиктемесине ылайык (2009) долбоор В [би] категориясына кирет жана курчап турган чөйрөгө таасирин толук баалоону (КЧТБ) талап кылбайт. АӨБ «В» категориясындагы долбоорлор үчүн саясатынын алкагында Баштапкы экологиялык баалоону (БЭБ) даярдоо керек.

Кыргыз Республикасынын мыйзамдарына ылайык долбоорду категориялаштыруу өткөрүлбөйт, бирок БЭБ жана КЧТАБ документтерин бирдей маанидеги катары кароого болот.

#### Экологиялык жана Социалдык Баалоонун максаттары

- Ар кандай түз жана кыйыр экологиялык тобокелдиктердин деңгээлдерин аныктоо жана баалоо жана алар менен байланыштуу кесепеттерди жумшартуу боюнча сунуштар
- Долбоордун БЭБ/КЧТАБ даярдоо
- Жаратылышты коргоо иш-чараларынын планын (ЖКП) даярдоо.

Ушул БЭБ/КЧТАБ максаты сунушталып жаткан долбоордун курчап турган чөйрөгө, дең соолукка, коопсуздукка потенциалдуу таасирин баалоо жана социалдык таасирин баалоо болуп саналат. Экологиялык баалоо процессинде, курулуш иштеринин күтүлүп жаткан

көлөмүнө байланыштуу курчап турган чөйрөгө эч кандай олуттуу жагымсыз жана кайтарымыз таасирлер белгиленген жок. БЭБ/КЧТАБ боюнча ушул документ өзүнө бүтүндөй долбоордук цикл аралыгында жүргүзүлө турган минималдаштырууга, кыскартууга жана жумшартууга (же жабыркаган тараптарга компенсация төлөп берүүгө) багытталган, кесепеттерди жумшартуу боюнча тийиштүү чаралар менен аныкталган потенциалдуу таасирлердин, алардын мүнөздөмөлөрүнүн, чоңдугунун, жайылуусунун жана узактыгынын, сезгич рецензорлордун жана козгозгон тонтордун негизиндеги Курчап турган чөйрөнү башкаруу планын (КЧБП) камтыйт.

Бардык участкактор үчүн БЭБ/КЧТАБ изилдөө болгон булактардын катарынан экинчи маалыматтын негизинде өткөрүлөт. Ошондой эле суунун, абанын сынамдарын алуу, ызы-чууну жана вибрацияны өлчөө өткөрүлдү.

### Долбоорду сүрөттөө

Төмөндө көрсөтүлгөн жол участкактору жолдун II техникалык категориясына чейин реконструкцияланат:

- Балыкчыдан (км) 43 километр белгисине чейин (км 0 - км 43), болжол менен 43 километр (км);
- Кочкордон Эпкин айылына чейин (км 64 – км 89), болжол менен 25 км;
- Эпкинден (89 км) Баш-Куугандыга чейин [мурдагы Дыйкан] (159 км), болжол менен 70 км;
- Дыйкан айылынан тартып (159 км) Кызыл-Жылдыз айылына чейин (183 км), болжол менен 24 км, мында Чаек айылын жана Кызыл-Жылдыз айылынын бир бөлүгүн айланып өтүү үчүн айланма жолду куруу каралууда.

Аралдан тартып (195 км) Төө-Ашуу ашуусуна чейинки (286 км), болжол менен 91 км, жол участкагу жолдун III техникалык категориясына чейин реконструкцияланат.

Долбоорлорго жолдун участкагу тууралуу кененирээк төмөндө берилген:

- Кыргызстандын мамлекеттик стандартына ылайык, долбоорлонгон жол участкакторун II, III техникалык категорияга чейин реконструкциялоо.
- Көпүрөлөрдү жана суу өткөрүүчү түтүктөрдү калыбына келтирүү, оңдоо жана/же алмаштыруу
- Каптал арыктарды жана башка дренаждык курулмаларды куруу.
- Тирегич дубалдарды жана зарыл болгондо дарыяларды коргоо боюнча чараларды камсыздоо
- Талаптагыдай жол белгилерин жана белги салууларды камсыздоо
- Коргоочу тосмолорду камсыздоо.

Жол Кыргызстандын геометрикалык долбоордук ченемдерине ылайык иштелип чыгышы керек жана ал болжолдонгон кызмат өтөө мөөнөтү аралыгында жол кыймылынан болгон жүктөмдү натыйжалуу көтөрүү үчүн туруктуу болушу керек. Жол өтмө бөлүктүн кеңдигинен (тилкелердин туурасынын суммасы) жана жол жээгинин кеңдигинен турган, кыймылдын эки тилкеси менен жол болот. Төмөндө кесилиш боюнча конструктивдүү элементтер берилген:

#### ➤ II долбоордук жолу үчүн:

- |                           |  |
|---------------------------|--|
| • Тилкелердин саны:       | 2  |
| • Тилкенин кеңдиги:       | 3,5-3,75 м                                     |
| • Өтмө бөлүктүн кеңдиги:  | 7,00-7,50 м                                    |
| • Жолдун четинин кеңдиги: | 3,25-3,75 м (анын ичинде 0,50-0,75 м салынган) |

- Жолдун жалпы узундугу: 15.00 м
- III долбоордук жолу үчүн:
  - Тилкелердин саны: 2
  - Тилкенин кеңдиги: 3.5 м
  - Отмө бөлүктүн кеңдиги: 7.00 м
  - Жолдун четинин кеңдиги: 2.5 м (анын ичинде 0.50 м салынган)
  - Жолдун жалпы узундугу: 12.00 м

#### Курчап турган чөйрөгө күтүлгөн таасирлери жана жумшартуу боюнча чаралар Таасирлери.

Жол долбоорунун таасиринин олуттуу бөлүгү түздөн-түз курулуш иштеринен келип чыгаары болжолдонууда, ал эми айрым таасирлер пайдалануу убагында пайда болот. Бул таасир кыймылдын интенсивдүүлүгүнүн жана транспорт каражаттарынын кыймылынын ылдамдыгынын жогорулашы менен шартталган жана газдардын чыгындыларынын деңгээлинин жогорулашына жана ызы-чуу таасирине, ошондой эле жөө жүрүүчүлөрдүн жана транспорт каражаттарынын катышуусу менен ЖТК потенциалдуу өсүшүнө кирет. Мындан тышкары зыяндуу заттардын төгүлүшү менен байланыштуу өзгөчө кырдаалдардын жогорку тобокелдиги болот.

#### Таасирлердин төмөндөгүдөй түрлөрү аныкталган:

(i) ызы-чуу таасири, булгоочу заттардын абага чыгындылары, ошондой эле вибрация, бул Долбоордун жолго жакын калктуу пункттардын чегинде жана мектеп, оорукана, мечит ж.б. (мисалы: жолго жакын жайгашкан үй чарбалары; карьерлер, базарлар, маданий жана тарыхый баалуулуктар, чоң кесилиштер) сыяктуу, таасир этүүнүн сезгич реципиенттери жайгашкан жерлерде өзгөчө мааниге ээ;

(ii) сууларга жана дарыяларга таасири;

(iii) карьерлерде толуктагычтардын булактарын издөөнүн жыйынтыгындагы таасир;

(iv) топуракка жана өсүмдүктөргө таасири, анын ичинде участкаларду тазалоо боюнча иштерден улам долбоордук жолдун жанындагы дарак көчөттөргө таасири;

(v) көпүрөлөрдү жана дренаждык курулмаларды реабилитациялоонун жыйынтыгындагы таасир;

(vi) асфальт өндүрүү (асфальт заводдору) жана толуктагычтарды майдалоо үчүн орнотмолордон болгон таасир;

(vii) подрядчынын жумушчу лагерлери тарабынан таасир. Мындан тышкары, таасирлер төмөндөгү топторго бөлүнгөн: долбоорлоо этабындагы таасир, куруу этабындагы таасир жана жумушчу этабындагы таасир.

#### **Иш-чаралар.**

Алдын ала долбоорлоонун жүрүшүндө жана долбоорлоо баскычында талантагыдай пландоо/даярдоо аркылуу таасирлерден алыс болууга болот.

Таасирлерди жумшартуу боюнча чаралар төмөндөгүлөрдү камтыйт:

- (i) эрозияга каршы иш-чараларды пайдалануу;
- (ii) дарактарды кыюудан алыс болуу үчүн, асимметрикалуу кеңейтүү;
- (iii) жумушчулар үчүн катуу нускамаларды берүү менен маданий жана тарыхый объектерге кол салуунун алдын алуу